

Logger L2


Simple and Effective Gas Monitoring

Key Features

- **Specifically designed for harsh wastewater environments:** unique & proven robust design and double o-rings
- **Longer battery life:** single battery lasts up to 12 months
- **Simplifies record management:** increased memory up to 42,000 data points, proprietary OdaStat-G™ software free to download from website
- **Easy to read display:** large alpha numeric display
- **Real Time Data:** LL (Long Term) Sensor can be connected to the OdaTrak System to transmit gas data via a fibre optic cable
- **Faster downloading:** Bluetooth communication link
- **Certified intrinsically safe** to use in most commonly found hazardous environments
- **Two different types of sensors:** LL (Long Term) Sensor or SL(Standard) Sensor

Specifications

Instrument Temp Range	-20°C (-4°F) to 50°C (122°F)
Sensor Temp Range	-10°C (14°F) to 40°C (104°F)
Instrument Relative Humidity Range	15-90% non-condensing
Ingress Protection	IP66/68
External Dimensions	Diameter 62mm (2.44") x Height 196mm (7.72")
Instrument Weight	420 grams / 14.8 oz
Power Supply	Replaceable C-Size Lithium Battery (approved battery type/brand/ make only)
Battery Life/Run Time	Greater than 8 months (for life of lithium battery)
Data Logging Capacity	Up to 42,000 readings in total
Interval	Selectable from 1 second to 1 hour
Data Logging	Capacity > Logging interval of 1min = 29 days
Duration Example	Capacity > Logging interval of 5min = 6+ months

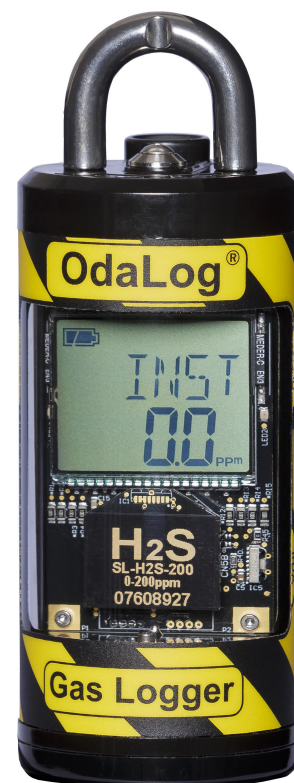

Typical Applications

- Gas monitoring in manholes, drains and pits
- Odour monitoring in sewer and streaming water
- Ventilation pipes and rising mains
- Inside sewer collection lines
- Selected areas in treatment plants
- Asset management and odour control

Models

Model	Gas	Part Number	Range	Resolution	Accuracy (Full Scale)	Accuracy (@ 20ppm gas, STP)
Long Term Logger (LL)	H ₂ S Hydrogen Sulphide	ODALLBT-H2S-1000	0-1000 ppm	1 ppm	1% Full Scale	
		ODALLBT-H2S-200	0-200 ppm	0.1 ppm	1% Full Scale	
Standard Logger (SL)	H ₂ S Hydrogen Sulphide	ODASLBT-H2S-2000	0-2000 ppm	1 ppm	2% Full Scale	
		ODASLBT-H2S-1000	0-1000 ppm	1 ppm	1% Full Scale	
		ODASLBT L-H2S-200	0-200 ppm	0.1 ppm	1% Full Scale	
		ODASLBT-H2S-50	0-50 ppm	0.1 ppm	4% Full Scale	
SL	CO Carbon Monoxide	ODASLBT-CO-1000	0-1000ppm	1 ppm	2% Full Scale	± 2ppm
SL	SO ₂ Sulphur Dioxide	ODASLBT-SO2-50	0-50 ppm	0.5 ppm	10% Full Scale	
SL	NO Nitric Oxide	ODASLBT-NO-100	0-100 ppm	1 ppm	2% Full Scale	
SL	NO ₂ Nitrogen Dioxide	ODASLBT-NO2-50	0-50 ppm	0.1 ppm	4% Full Scale	
SL	Cl ₂ Chlorine	ODASLBT-CL2-20	0-20 ppm	0.1 ppm	10% Full Scale	
SL	HCN Hydrogen Cyanide	ODASLBT-HCN-30	0-30 ppm	0.2 ppm	6% Full Scale	
SL	NH ₃ Ammonia	ODASLBT-NH3-100	0-100 ppm	1 ppm	10% Full Scale	

NOTE: STP = Standard Temperature and Pressure: 20°C (68°F) @ absolute pressure 101.3 kPa (14.7 psi)

Servicing

We recommend that the OdaLog® L2 is returned to an authorised OdaLog® service centre at least once every six months for a full inspection, calibration and linearity testing.

Warranty

12 month warranty when used in accordance with the operator's manual (excluding calibration and freight costs).

Software

The OdaLog® L2 needs to be used in conjunction with our proprietary software OdaStat-G™ for retrieval and analysis of all your logged data. The software may be downloaded, free-of-charge, from our website.

Certification / Approval

IECExITA 08.0010	Nemko08ATEX1270
Ex ia IIC T4	Ex II 2 G
(T _{AMB} = -20°C to 50°C)	Ex ia IIC T4
IP66/68	IP66/68

In the interest of continued improvement, we reserve the right to change design features and specifications without prior notice.

Our ability to provide software and support is dependent on applicable export control laws (including those of the United States) and the export policy from time to time of Thermo Fisher Scientific Inc.

For more information, contact Thermo Fisher Scientific

For Research Use Only. Not for use in diagnostic procedures. © 2020 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific and its subsidiaries unless otherwise specified. **20200310-168**

In Australia:

For customer service, call 1300-735-292

To fax an order, use 1800-067-639

To email an order, ordersau@thermofisher.com

In New Zealand:

For customer service, call 0800-933-966

To fax an order, use 0800-329-246

To email an order, ordersnz@thermofisher.com

ThermoFisher
SCIENTIFIC