# **HS-100 Accelerometer**

AC acceleration output via Braided Cable


#### **Key Features**

- · Most common seller
- · For use with data collector
- · Customisable features

#### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



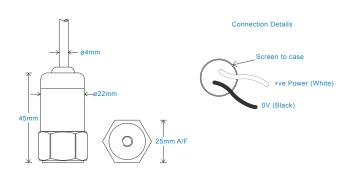

#### **Technical Performance**

 $\begin{array}{c} \mbox{Mounted Base Resonance} & \mbox{see 'How To Order' table (nominal)} \\ \mbox{Sensitivity} & \mbox{see: 'How To Order' table $\pm 10\%$} \\ \mbox{Nominal $80 \mbox{Hz}$ at $22^{\circ}$C} \\ \mbox{Frequency Response} & \mbox{2Hz (120cpm) to $10k \mbox{Hz (600kcpm)}$ $\pm 5\%$} \\ \mbox{1.5Hz (90cpm) to $12k \mbox{Hz (720kcpm)}$ $\pm 10\%$} \\ \mbox{0.8Hz (48cpm) to $15k \mbox{Hz (900kcpm)}$ $\pm 3d \mbox{B}$} \\ \mbox{Isolation} & \mbox{Base isolated} \\ \mbox{Range} & \mbox{see: 'How To Order' table} \\ \mbox{Transverse Sensitivity} & \mbox{Less than } 5\% \\ \end{array}$ 

#### Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	125gms (nominal)
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	Braided - length to be specified with order
Mounting Threads	see: 'How To Order' table

#### Electrical

 Electrical Noise
 0.1mg max

 Current Range
 0.5mA to 8mA

 Bias Voltage
 10 - 12 Volts DC

 Settling Time
 2 seconds

 Output Impedance
 200 Ohms max

 Case Isolation
 >108 Ohms at 500 Volts

### Environmental


 Operating Temperature Range
 -55 to 140°C

 Sealing
 IP65

 Maximum Shock
 5000g

 EMC
 EN61326-1:2013

## Typical Frequency Response (at 100mV/g)

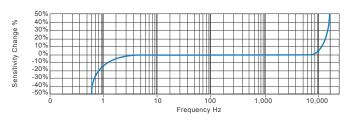


### **Applications**

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



## How To Order

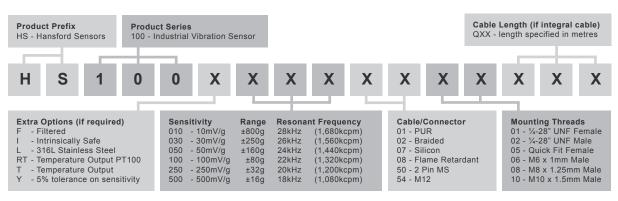



www.hansfordsensors.com sales@hansfordsensors.com

