


HS-540 Vibration Module

Key Features

- Converts 0-10V to 4-20mA or 4-20mA to 0-10V
- Isolated
- Din Rail Mounted
- Compact design

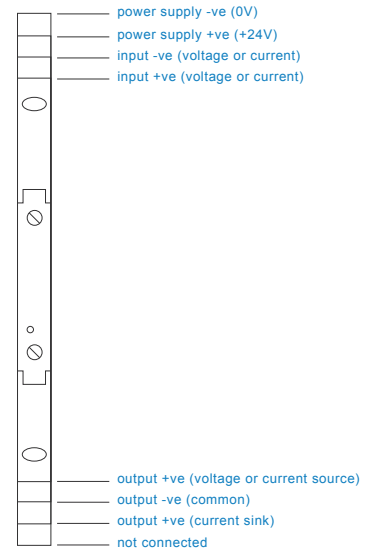

Technical Performance

Input	0-10V or 4-20mA
Output	4-20mA or 0-10V
Output Linearity Error	±0.03% typical
Temperature Coefficient	±100 ppm/°C

Mechanical

Case Material	Plastic
Mounting	DIN Rail TS35 (Top Hat)
Dimensions	4 x 3.7 x 0.3 in (H x D x W)
Connections	Screw Clamp
Conductor Size	0.02 to 0.2 in
Weight	2.1 oz. (nom)


Electrical

Power Input	+24 V DC at 50 mA (HS-570 Power Supply Module)
Supply Current	30mA max.
Input Impedance	500 KOhms
Isolation Voltage	1 KV

Environmental

Operating Temperature Range	32 to 131°F
Installation Category (IEC664)	II
Equipment Class (IEC536)	III
EMC	EN61326-1:2013

How To Order

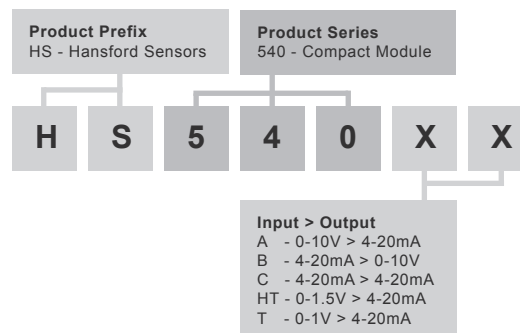

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
 TS050U.3

