

# Analog Input Module: Frequency <sup>◇</sup>

Measure Frequencies to 1MHz

## Description

The MAQ20 frequency input module offers 8 input channels for measuring frequencies up to 1MHz. All channels are individually configurable for range and alarms to match the most demanding applications. Four controllable outputs can be used for sensor excitation or as 5V logic compatible outputs. High, Low, High-High and Low-Low alarms provide essential monitoring and warning functions to ensure optimum process flow and fail-safe applications. Field I/O connections are made through a pluggable terminal block with positions designated for the termination of wiring shields.

Input-to-bus isolation is a robust 1500Vrms and each individual channel is protected up to 240Vrms continuous.

Channels in a module can be selectively enabled for scanning. All channels are enabled by default; however, non-used channels can be disabled to increase the system sampling rate of enabled channels.

## ► Features

- 8 Input Channels
- 50mV Sensitivity
- Frequency Range – 0.5Hz to 1MHz plus State Change
- Operating Range – DC + Signal  $\leq$ 300Vrms
- All Channels Individually Configurable for Range and Alarms
- 4 Excitation Sources to Power Sensors or Provide 5V Logic Compatible Output
- 1500Vrms Input-to-Bus Isolation
- Each Channel Protected up to 240Vrms
- Selective Enabling of Module Channels for Scanning

<sup>◇</sup> Preliminary at date of printing.  
Contact factory for availability.

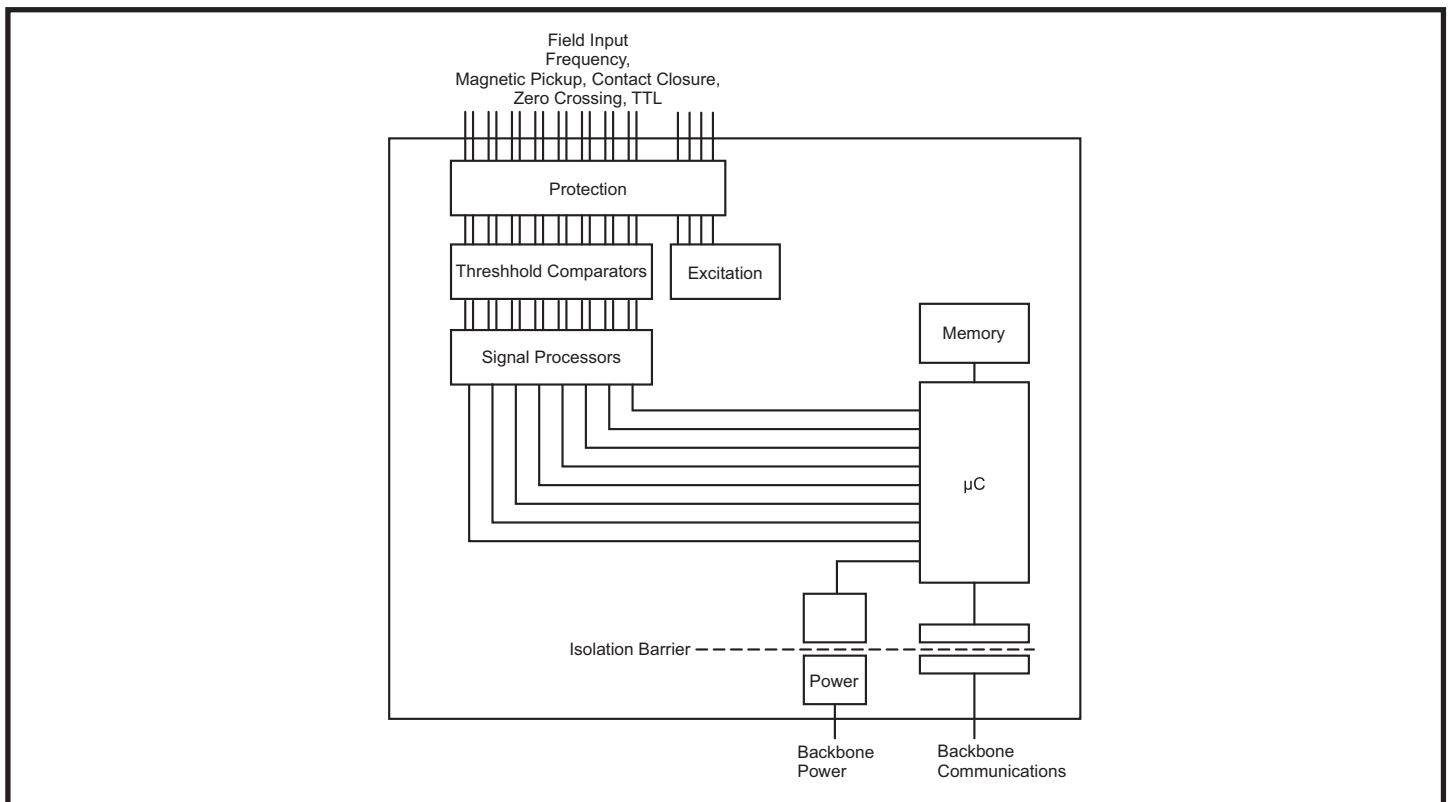


Figure 1: MAQ20 Frequency Input Module Block Diagram

**Specifications** Typical\* at T<sub>A</sub>=+25°C and +24VDC system power

Module	Description
MAQ20-FREQ <sup>◇</sup>	8-channel, Frequency Input, 0.5Hz to 1MHz, plus state change detect
Input Signal	50mV Sensitivity
Excitation	Operating Range: DC + signal ≤300Vrms Four 5V sources at 8mA each Use for sensor excitation or 5V logic compatible output
Per Channel Setup	Individually configurable for range, alarms
Input Protection	
Continuous	240Vrms max
Transient	ANSI/IEEE C37.90.1
CMV	
Channel-to-Bus	1500Vrms, 1 min
Channel-to-Channel	0V
Transient	ANSI/IEEE C37.90.1
Resolution and Accuracy	32 bits
Clock Accuracy	±0.003%
Clock Accuracy Over Temp	±0.01%, -40°C to +85°C
Scan Rate	1000 Ch/s
Alarms	High / High-High / Low / Low-Low
Power Supply Current	400mA
Dimensions (h)(w)(d)	4.51" x 0.60" x 3.26" (114.6mm x 15.3mm x 82.8mm)
Environmental	
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Relative Humidity	0 to 95% Noncondensing
Emissions, EN61000-6-4	ISM Group 1
Radiated, Conducted	Class A
Immunity EN61000-6-2	ISM Group 1
RF	Performance A ±0.5% Span Error
ESD, EFT	Performance B
Certifications	Heavy Industrial CE, ATEX Pending UL Class I, Division 2, Groups A, B, C, D Pending

**NOTES:**

\* Contact factory or your local Dataforth sales office for maximum values.

<sup>◇</sup> Preliminary at date of printing. Contact factory for availability.

**Ordering Information**

Model	Description
MAQ20-FREQ <sup>◇</sup>	Analog Input Module; Frequency, 8-ch

**For input connections and full details on module operation, refer to MA1048 – MAQ20 Frequency Input Module Hardware User Manual, available for download at: [www.dataforth.com/maq20\\_download.aspx](http://www.dataforth.com/maq20_download.aspx)**