

Cisco Industrial Ethernet 2000 Series Switches

Product Overview

The Cisco® Industrial Ethernet 2000 (IE 2000) Series is a range of compact, ruggedized access switches that handle security, voice, and video traffic across industrial networks. They provide customers in industries such as automotive, oil and gas, mining, transportation, and energy with highly secure access and industry-leading convergence using Cisco Resilient Ethernet Protocol (REP).

Product Details

The Cisco IE 2000 Series are designed for low cost, low ports, and small sizes. They offer:

- Four, eight, or 16 10/100Base-T Ethernet ports (Small Form-Factor Pluggable [SFP] downlinks on selected models); fixed configurations with a compact form factor
- Two gigabit combo ports: SFP (100 Mbps and 1 Gbps) or RJ45 uplink
- Dual-input DC power supply, alarm relays, DIN rail mount
- Industrial Power over Ethernet (PoE) solution
- Conformal coating available
- Swappable SD flash card and mini-USB connector
- Industrial environmental compliance and certifications
- Industrial partner applications: Ethernet/IP and PROFINET

Primary Benefits and Features

- **Easy deployment:** Zero-touch discovery using Dynamic Host Control Protocol (DHCP), express setup, and fast bootup time (60 seconds) to help in migrating to an Ethernet environment without resistance.
- **Security:** 802.1x, port security, and DHCP allow dynamic port-based authentication; Secure Shell (SSHv2); SNMPv3 provides encrypted administrator traffic during Telnet and SNMP sessions; TACACS+ and RADIUS authentication facilitate centralized control and restrict unauthorized users.
- **Resiliency:** Cisco REP ring protocol and PROFINET– Media Redundancy Protocol (MRP)
- **Manageability:** Auto SmartPort, Web Device Manager, Telnet, HTTPS access, SNMP, CNA, and Cisco Prime Infrastructure.
- **Network Address Translation (NAT):** Line-rate, hardware-enabled 1:1 static address translation designed to enable duplicate IP address usage in the Layer 2 machine node networks.
- **Layer 3 routing:** IPv4 and IPv6.
- **Industrial PoE:** PoE (IEEE 802.af) and PoE+ (802.3at) supported on selected models.
- **Industrial automation protocols:** EtherNet/IP (CIP) and PROFINET MRP (IEC 62439-2) allow integration with existing management platforms from Rockwell, Siemens, and others.

Product Specifications

Switch Performance and Scalability

- Maximum Forwarding Bandwidth 3.8Gbps
- Maximum Switching Bandwidth 7.6Gbps
- Maximum Forwarding rate: 5.66Mpps with 64-byte packets (Line-rate at all packet sizes)
- Egress buffer: 2 MB
- Unicast MAC addresses: 8000
- Internet Group Management Protocol (IGMP) multicast groups: 255
- Maximum virtual LANs (VLANs): 1005
- IPv4 MAC security ACEs: 384 (default ternary content-addressable memory [TCAM] template)
- Bidirectional, 128 NAT translation entries
- IPv4 routing: 3500 routes, IPv6 routing: 1750 routes

Detailed Product Information

Figure 1 shows switch models, and Table 1 shows the Cisco IE 2000 Series configuration information. Table 2 lists the SKUs for power supplies and license upgrades. Table 3 includes IE 2000 Series product specifications. Table 4 lists software features. Table 5 includes compliance specifications. Table 6 outlines management and relevant industry standards.

Figure 1. Industrial Ethernet 2000 Series

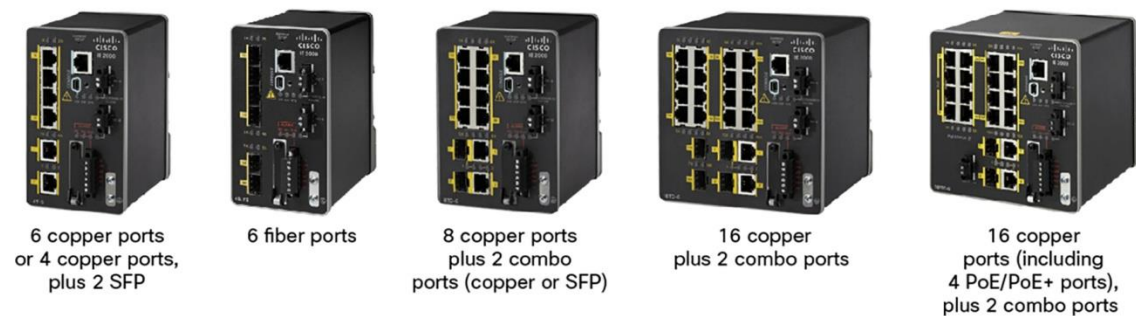


Table 1. Industrial Ethernet 2000 Series Configurations

| Product Number | Total Ports | RJ45 Ports | Combo Ports | SFP Ports | Manufacturing License | Type of possible Upgrade | IEEE 1588 | L2NAT | PoE/PoE(+) | Conformal Coating |
|-----------------|-------------|------------|-------------|-----------|-----------------------|--------------------------|-----------|-------|------------|-------------------|
| IE-2000-4TS-L | 6 | 4 FE | | 2 FE | LAN Lite | 3 | | | | |
| IE-2000-4TS-B | 6 | 4 FE | | 2 FE | LAN Base | 1 | | | | |
| IE-2000-4T-L | 6 | 6 FE | | | LAN Lite | 3 | | | | |
| IE-2000-4T-B | 6 | 6 FE | | | LAN Base | 1 | | | | |
| IE-2000-4TS-G-L | 6 | 4 FE | | 2 GE | LAN Lite | 3 | | | | |
| IE-2000-4TS-G-B | 6 | 4 FE | | 2 GE | LAN Base | 1 | | | | |
| IE-2000-4T-G-L | 6 | 4 FE, 2 GE | | | LAN Lite | 3 | | | | |
| IE-2000-4T-G-B | 6 | 4 FE, 2 GE | | | LAN Base | 1 | | | | |

| Product Number | Total Ports | RJ45 Ports | Combo Ports | SFP Ports | Manufacturing License | Type of possible Upgrade | IEEE 1588 | L2NAT | PoE/PoE(+) | Conformal Coating |
|--------------------|-------------|------------|-------------|------------|-----------------------|--------------------------|-----------|-------|------------|-------------------|
| IE-2000-4S-TS-G-L | 6 | | | 4 FE, 2 GE | LAN Lite | 3 | | | | |
| IE-2000-4S-TS-G-B | 6 | | | 4 FE, 2 GE | LAN Base | 1, 3 | | | | |
| IE-2000-8TC-L | 10 | 8 FE | 2 FE | | LAN Lite | 3 | | | | |
| IE-2000-8TC-B | 10 | 8 FE | 2 FE | | LAN Base | 1 | | | | |
| IE-2000-8TC-G-L | 10 | 8 FE | 2 GE | | LAN Lite | 3 | | | | |
| IE-2000-8TC-G-B | 10 | 8 FE | 2 GE | | LAN Base | 1 | | | | |
| IE-2000-8TC-G-E | 10 | 8 FE | 2 GE | | LAN Base | 1, 2, 4 | Yes | U* | | |
| IE-2000-16TC-L | 20 | 16 FE | 2 FE | 2 FE | LAN Lite | 3 | | | | |
| IE-2000-16TC-B | 20 | 16 FE | 2 FE | 2 FE | LAN Base | 1 | | | | |
| IE-2000-16TC-G-L | 20 | 16 FE | 2 GE | 2 FE | LAN Lite | 3 | | | | |
| IE-2000-16TC-G-E | 20 | 16 FE | 2 GE | 2 FE | LAN Base | 1, 2, 4 | Yes | U* | | |
| IE-2000-16TC-G-X | 20 | 16 FE | 2 GE | 2 FE | LAN Base | 1, 2, 4 | Yes | U* | | Yes |
| IE-2000-8TC-G-N | 10 | 8 FE | 2 GE | | Enhanced LAN Base | 1, 2 | Yes | Yes | | |
| IE-2000-16TC-G-N | 20 | 16 FE | 2 GE | 2FE | Enhanced LAN Base | 1, 2 | Yes | Yes | | |
| IE-2000-16PTC-G-L | 18 | 16 FE | 2 GE | | LAN Lite | 3 | | | Yes | |
| IE-2000-16PTC-G-E | 18 | 16 FE | 2 GE | | LAN Base | 1, 2 | Yes | U | Yes | |
| IE-2000-16PTC-G-NX | 18 | 16 FE | 2 GE | | Enhanced LAN Base | 1, 2 | Yes | Yes | Yes | Yes |

"Type of possible Upgrade" Legend:

- 1: LAN Base to IP Lite Cisco IOS Softw are Upgrade
- 2: Enhanced LAN Base to IP Lite Cisco IOS Softw are Upgrade
- 3: LAN Lite to LANBase Cisco IOS Software Upgrade
- 4: LAN Base to Enhanced LAN Base Cisco IOS Software Upgrade and License Upgrade
- U: Upgradable to L2NAT via Enhanced Lan Base or IP Lite license

Table 2. Accessories and License Upgrade PIDs

| Product Number | Description |
|--------------------|---|
| SD-IE-1GB= | 1 GB Ruggedized SD memory card (must be ordered, not included by default) |
| STK-RACK-DINRAIL= | 19 in. DIN Rail mount kit |
| L-IE2000-L-B= | IE2000 LAN Lite to LAN Base e-license |
| L-IE2000-B-E= | IE2000 LAN Base to Enhanced LAN Base e-license |
| LIC-IE2000-IP-L= | IE2000 LAN Base or Enhanced LAN Base to IPLite e-license |
| LIC-IE2000-L-IP= | IE2000 LAN Lite to IPLite e-license |
| LIC-MRP-MANAGER= | MRP Ring Manager license |
| LIC-MRP-Client= | MRP Ring Client license |
| Wallmount-IE2k-04= | Wall mount kit accessory f or IE2000 4-ports downlink PID |
| Wallmount-IE2k-08= | Wall mount kit accessory f or IE2000 8-ports downlink PID |
| Wallmount-IE2k-16= | Wall mount kit accessory f or IE2000 16-ports downlink PID |

Table 3. Product Specifications

| Description | Specification |
|--|--|
| Hardware | <ul style="list-style-type: none"> • 256 MB DRAM with ECC memory • IEEE 1588v2 FPGA • 64 MB on-board flash memory • 1GB removable SD flash memory card (optional) • Mini-USB connector |
| Alarm | <ul style="list-style-type: none"> • Alarm I/O: Two alarm inputs to detect dry contact open or close; one alarm output relay |
| Power Consumption | <ul style="list-style-type: none"> • 4-port downlink models: 9.5-15 W • 8-port downlink models: 12.5-20 W • 16-port downlink models: 21-30 W • 4-port PoE/PoE+ models: 21-30 W (16-port base switch) and 4 PoE/PoE+ power requirement |
| Connectors and Cabling | <ul style="list-style-type: none"> • 100BASE-FX MMF (2 km), -LX SMF (10 km) -ZX SMF (100 km), BX10 SMF (10 km) SFP and CWDM SFP- based ports: LC fiber connectors • 10/100/1000BASE-T ports: RJ-45 connectors, 4-pair Category 5 UTP cabling |
| Dimensions (H x W x D) Including DIN Rail | <ul style="list-style-type: none"> • IE-2000 6 ports (copper downlinks) chassis: 5.1"H x 2.95"W x 4.51"D in (130mm H x 74.9mm W x 115mm D) • IE-2000 6 ports (SFP downlinks) chassis: 5.1"H x 3.15"W x 4.51"D in (130mm H x 80mm W x 115mm D) • IE-2000 10 ports short chassis: 5.1"H x 3.6"W x 4.51"D (130mm H x 91.4mm W x 115mm D) • IE-2000 10 ports long chassis: 5.1"H x 3.6"W x 5.26"D (130mm H x 91.4mm W x 134mm D) • IE-2000 18-20 ports chassis: 5.1"H x 5.0"W x 5.26"D (130mm H x 127mm W x 134mm D) • PWR-IE50W-AC=: 5.8"H x 2.0"W x 4.4"D (147mm H x 51 mm W x 112mm D) • PWR-65W-PC-AC=: 5.9 "H x 2.6"W x 4.6"D (150mm H x 66mm W x 117mm D) • PWR-65W-PC-DC=: 5.9 "H x 2.6"W x 4.6"D (150mm H x 66mm W x 117mm D) • PWR-IE170W-PC-AC=: 5.93 x 3.72 x 5.60 in. (150.6 x 94.5 x 142.2mm) • PWR-IE170W-PC-DC=: 5.93 x 4.47 x 5.75 in. (150.6 x 113.5 x 145.8mm) |
| Weight | <ul style="list-style-type: none"> • IE-2000 6 ports chassis: 2.45 lbs (1.11 kg) • IE-2000 6 ports (SFP): 2.69 lbs (1.22 kg) • IE-2000 10 ports short chassis: 2.75 lbs (1.25 kg) • IE-2000 10 ports long chassis: 3.45 lbs (1.56 kg) • IE-2000 18-20 ports chassis: 4.35 lbs (1.97 kg) • PWR-IE50W-AC=: 1.4 lb (0.65 kg) • PWR-IE50W-AC-IEC=: 1.4 lb (0.65 kg) • PWR-IE65W-PC-DC=: 2.6 (1.18 Kg) • PWR-IE65W-PC-AC=: 2.7 (1.24 Kg) • PWR-IE170W-PC-AC=: 3.88 pounds (1.76 kg) • PWR-IE170W-PC-DC=: 3.7 pounds (1.67 kg) |

Table 4. IE 2000 Series Power Supplies

| Product Number | Wattage | Rated Nominal Input Operating Range | Supported Input Voltage Operating Range | Power Output | PoE/PoE+ Support | Use Case Scenario |
|---------------------------|---------|--|---|--------------|------------------|---|
| PWR-IE170W- PC-AC= | 170W | AC 100-240V/2.3A 50-60Hz or DC 125-250V/2.1A | AC 90-264V or DC 106-300V | 54VDC/3.15A | Yes | Maximum PoE/PoE+ port support in a AC or high DC environment ¹ |
| PWR-IE170W- PC-DC= | 170W | DC 12-54V/23A | DC 10.8-60V | 54VDC/3.15A | Yes | Maximum PoE/PoE+ port support in a DC environment ¹ |
| PWR-IE50W- AC= | 50W | AC 100-240V/1.25A 50-60Hz or DC 125-250V/1.25A | AC 90-264V or DC 106-300V | 24VDC/2.1A | No | Provides power to main system, not used for PoE in an AC or high DC environment |
| PWR-IE50W- AC-IEC= | 50W | AC 100-240V/1.25A 50-60Hz | AC 90-264V | 24VDC/2.1A | No | Provides power to main system, not used for PoE in DC environment |

| Product Number | Wattage | Rated Nominal Input Operating Range | Supported Input Voltage Operating Range | Power Output | PoE/PoE+ Support | Use Case Scenario |
|-------------------------|---------|--|---|--------------|------------------|---|
| PWR-IE65W-PC-AC= | 65W | AC 100-240V/1.4A 50-60Hz or DC 125-250V/1.0A | AC 90-264V or DC 106-300V | 54VDC/1.2 A | Yes | Supports up to 4 ports PoE or 2 ports PoE+ when used in PoE power input in an AC or high DC environment |
| PWR-IE65W-PC-DC= | 65W | DC 24-48VDC/4.5A | DC 18-60V | 54VDC/1.2 A | Yes | Supports up to 4 ports PoE or 2 ports PoE+ when used in PoE power input in a DC environment |

¹ The 170W (both AC and DC) power supplies have enough power for the base unit and the PoE. Connect one power output from the 170W PSU to the main power input of the IE2000, and the other power output of the 170W PSU to the PoE power input of the IE2000.

Table 5. Cisco IE 2000 Software Features

| LAN Lite License | Baseline Features |
|-------------------------------|--|
| Layer 2 Switching | IEEE 802.1, 802.3, 802.3at, 802.3af standard (see Table 6), VTPv2, NTP, UDLD, CDP, LLDP, Unicast MAC filter, Resilient Ethernet Protocol (REP), Media Redundancy Protocol (MRP) Ring (IEC 62439-2) |
| Security | SCP, SSH, SNMPv3, TACACS+, RADIUS Server/Client, MAC Address Notification, BPDU Guard, SPAN session |
| Multicast | IGMPv1, v2, v3 Snooping, IGMP filtering, IGMP Querier |
| Management | Fast Boot, Express Setup, Web Device Manager, CNA, Cisco Prime, LMS, MIB, SmartPort, SNMP, syslog |
| Industrial Ethernet | EtherNet/IP, Profinet v2 |
| LAN Base License | Additional Features |
| Layer 2 Switching | VTPv3, EtherChannel, Voice VLAN, Flexlink |
| Security | IPv4 Port-Security, DHCP Snooping, Dynamic ARP Inspection, IP Source Guard, 802.1x, Guest VLAN, MAC Authentication Bypass, 802.1x Multi-Domain Authentication, Storm Control, Trust Boundary, Access-List (ACL), IPv6 MLD snooping |
| Quality of Service | IPv4 Ingress Policing, Rate-Limit, Egress Queuing/Shaping, AutoQoS |
| Management | Port-Based DHCP, Storm Control - Unicast, Multicast, Broadcast, SPAN Sessions, RSPAN, DHCP Server, Customized TCAM/SDM Size Configuration, Embedded Event Manager (EEM) |
| Industrial Ethernet | IEEE 1588 PTPv2 |
| IPv4 Routing | IPv4 static routing |
| IPv6 Routing | IPv6 host support, HTTP over IPv6, SNMP over IPv6 |
| Enhanced LAN Base | Additional Features |
| Industrial Management | Layer 2 switching with 1:1 static Network Address Translation (NAT) |
| IP Lite License | Additional Features |
| IPv4 Routing | RIP, OSPF, EIGRP, VRF Lite, PIM for L3 multicast routing including sparse (SM) and dense (DM) mode. |
| IPv6 Routing | IPv6 Static routing, OSPFv3 |
| Security | FIPS 140-2 |
| Embedded Event Manager | EEM feature enabled with IP Lite License |

Table 6. Compliance Specifications

| Description | Specification |
|------------------------------|--|
| Safety Certifications | <ul style="list-style-type: none"> • UL/CSA 60950-1 • EN 60950-1 • CB to IEC 60950-1 (with country deviations) • NOM to NOM-019-SCF1 (through partners and distributors) • CE Marking |
| Hazard Location | <ul style="list-style-type: none"> • ANSI/ISA 12.12.01 (Class1, Div 2 A-D)[*] • EN 60079-0, -15 ATEX Certificate (Class 1, Zone2 A-D)[*] |

| Description | Specification |
|--|--|
| EMC Emissions and Immunity Compliance | <p>Cabinet enclosure required</p> <ul style="list-style-type: none"> • FCC 47 CFR Part 15 Class A • EN 55022A Class A • VCCI Class A • RoHS compliance • AS/NZS CISPR 22 Class A, AS/NZS CISPR 24 • CISPR11 Class A, CISPR22 Class A • ICES 003 Class A • KCC -Korea • CE Marking • C-Tick (Australia) • Russia certification • Brazil certification • IEC/EN/EN61000-4-2 (Electro Static Discharge), 15kV air/8kV contact • IEC/EN 61000-4-3 (Radiated Immunity , 10 and 20 V/m) • IEC/EN 61000-4-4 (Fast Transients - 4kV power line, 4kV data line) • IEC/EN 61000-4-5 (Surge 2 kV/1 kV) • IEC/EN 61000-4-6 (Conducted Immunity , 10 V/emf) • IEC/EN 61000-4-8 (Power Frequency Magnetic Field Immunity) • IEC/EN 61000-4-9 (Pulse Magnetic Field Immunity) • IEC/EN 61000-4-10 (Oscillatory Magnetic Field Immunity) • IEC/EN 61000-4-11 (AC power Voltage Immunity) • IEC/EN 61000-4-29 (Voltage Dips Immunity) • IEC/EN 61000-6-1 (Immunity for Light Industrial Environments) • IEC/EN 61000-6-2 (Immunity for Industrial Environments) • IEC/EN 61000-6-4 Class A • EN 61326 |
| Shock and Vibration | <ul style="list-style-type: none"> • IEC 60068-2-27 (Operational Shock: 30G 11ms, half sine) • IEC 60068-2-27 (Non-Operational Shock 55-70G, trapezoidal) • IEC 60068-2-6, IEC 60068-2-64, EN 61373 (Operational Vibration) • IEC 60068-2-6, IEC 60068-2-64, EN 61373 (Non-operational Vibration) |
| Industry Standards | <ul style="list-style-type: none"> • UL508 • CSA C22.2 No. 142 • EN 61131-2 (EMC/EMI, environmental, mechanical) • Protective coating (specific models only) • Marine DnV • Substation KEMA (IEEE 1613, IEC 61850-3) • Railway EN 50155 (EMI/EMC, environmental, mechanical) • EN50121-3-2 • EN50121-4 • NEMA TS-2 (EMC, environmental, mechanical) • ABB Industrial IT certification • IP30 • ODVA Industrial Ethernet/IP support • PROFINETv 2.3 support |
| Corrosive Testing | <ul style="list-style-type: none"> • ISO-12944-6 • IEC-60068-2-60 |
| Humidity | <ul style="list-style-type: none"> • IEC 60068-2-52 (salt fog mist, test Kb) marine environments • IEC 60068 -2-3 • IEC 60068-2-30 • Relative humidity : 5% to 95% non-condensing |
| Operating Temperature | <ul style="list-style-type: none"> • -40C to +70C (vented enclosure - 40 LFM Air Flow) • -40C to +60C (sealed enclosure – 0 LFM Air Flow) • -34C to +75C (fan or blower-equipped enclosure – 200 LFM Air Flow) • -40C to +85C (IEC 60068-2-2 Environmental Type Testing – 16 hours) |

| Description | Specification |
|---|--|
| | <ul style="list-style-type: none"> Operational altitude: Up to 15,000 ft |
| Storage Temperature | <ul style="list-style-type: none"> -40 C to +85 C (storage temperature) IEC 60068-2-14 Storage altitude: Up to 15,000 ft |
| Mean Time Between Failure (MTBF) | <ul style="list-style-type: none"> Mean time between failure: 374,052 hours (42.7 years) |
| Warranty | <ul style="list-style-type: none"> Five-year limited warranty on all IE-2000 HW PIDs and all IE Power Supplies defined in table 4 above. See link below for details on warranty |

Table 7. Management and Standards

| Description | Specification | Specification |
|--|--|---|
| IEEE Standards | <ul style="list-style-type: none"> IEEE 802.1D MAC bridges, STP IEEE 802.1p Layer 2 COS prioritization IEEE 802.1q VLAN IEEE 802.1s Multiple Spanning-Trees IEEE 802.1w Rapid Spanning-Tree IEEE 802.1x Port Access Authentication IEEE 802.1AB LLDP IEEE 802.3ad Link Aggregation (LACP) IEEE 802.3af Power over Ethernet provides up to 15.4W DC power to each end device IEEE 802.3at Power over Ethernet provides up to 25.5W DC power to each end device | <ul style="list-style-type: none"> IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus IEEE 802.3ah 100BASE-X SMF/MMF only IEEE 802.3x full duplex on 10Base-T IEEE 802.3 10BASE-T specification IEEE 802.3u 100BASE-TX specification IEEE 802.3ab 1000BASE-T specification IEEE 802.3z 1000BASE-X specification IEEE 1588v2 PTP Precision Time Protocol |
| RFC Compliance | <ul style="list-style-type: none"> RFC 768: UDP RFC 783: TFTP RFC 791: IPv4 protocol RFC 792: ICMP RFC 793: TCP RFC 826: ARP RFC 854: Telnet RFC 951: BootP RFC 959: FTP RFC 1157: SNMPv1 RFC 1901,1902-1907 SNMPv2 RFC 2273-2275: SNMPv3 RFC 2571: SNMP Management RFC 1166: IP Addresses RFC 1256: ICMP Router Discovery | <ul style="list-style-type: none"> RFC 1305: NTP RFC 1492: TACACS+ RFC 1493: Bridge MIB Objects RFC 1534 DHCP and BootP interoperation RFC 1542: Bootstrap Protocol RFC 1643: Ethernet Interface MIB RFC 1757: RMON RFC 2068: HTTP RFC 2131, 2132: DHCP RFC 2236: IGMP v2 RFC 3376: IGMP v3 RFC 2474: DiffServ Precedence RFC 3046: DHCP Relay Agent Information Option RFC 3580: 802.1x RADIUS RFC 4250-4252 SSH Protocol |
| Simple Network Management Protocol (SNMP) MIB Objects | <ul style="list-style-type: none"> BRIDGE-MIB CALISTA-DPA-MIB CISCO-ACCESS-ENVMON-MIB CISCO-ADMISSION-POLICY-MIB CISCO-AUTH-FRAMEWORK-MIB CISCO-BRIDGE-EXT-MIB CISCO-BULK-FILE-MIB CISCO-CABLE-DIAG-MIB CISCO-CALLHOME-MIB CISCO-CAR-MIB CISCO-CDP-MIB CISCO-CIRCUIT-INTERFACE-MIB CISCO-CLUSTER-MIB CISCO-CONFIG-COPY-MIB CISCO-CONFIG-MAN-MIB CISCO-DATA-COLLECTION-MIB CISCO-DHCP-SNOOPING-MIB | <ul style="list-style-type: none"> CISCO-SNMP-TARGET-EXT-MIB CISCO-STACK-MIB CISCO-STACKMAKER-MIB CISCO-STP-EXTENSIONS-MIB CISCO-SYSLOG-MIB CISCO-TCP-MIB CISCO-UDLD-MIB CISCO-VLAN-IFTABLE-RELATIONSHIP-MIB CISCO-VLAN-MEMBERSHIP-MIB CISCO-VTP-MIB ENTITY-MIB ETHERLIKE-MIB HC-RMON-MIB IEEE8021-PAE-MIB IEEE8023-LAG-MIB IF-MIB IP-FORWARD-MIB |

| Description | Specification | Specification |
|-------------|---|--|
| | <ul style="list-style-type: none"> • CISCO-ENTITY-ALARM-MIB • CISCO-ENTITY-VENDORTYPE-OID-MIB • CISCO-ENVMON-MIB • CISCO-ERR-DISABLE-MIB • CISCO-FLASH-MIB • CISCO-FTP-CLIENT-MIB • CISCO-IF-EXTENSION-MIB • CISCO-IGMP-FILTER-MIB • CISCO-IMAGE-MIB • CISCO-IP-STAT-MIB • CISCO-LAG-MIB • CISCO-LICENSE-MGMT-MIB • CISCO-MAC-AUTH-BYPASS-MIB • CISCO-MAC-NOTIFICATION-MIB • CISCO-MEMORY-POOL-MIB • CISCO-PAE-MIB • CISCO-PAGP-MIB • CISCO-PING-MIB • CISCO-PORT-QOS-MIB • CISCO-PORT-SECURITY-MIB • CISCO-PORT-STORM-CONTROL-MIB • CISCO-PRIVATE-VLAN-MIB • CISCO-PROCESS-MIB • CISCO-PRODUCTS-MIB • CISCO-RESILIENT-ETHERNET-PROTOCOL-MIB • CISCO-RTTMON-ICMP-MIB • CISCO-RTTMON-IP-EXT-MIB • CISCO-RTTMON-MIB • CISCO-RTTMON-RTP-MIB | <ul style="list-style-type: none"> • IP-MIB • LLDP-EXT-MED-MIB • LLDP-MIB • NETRANGER • NOTIFICATION-LOG-MIB • OLD-CISCO-CHASSIS-MIB • OLD-CISCO-CPU-MIB • OLD-CISCO-FLASH-MIB • OLD-CISCO-INTERFACES-MIB • OLD-CISCO-IP-MIB • OLD-CISCO-MEMORY-MIB • OLD-CISCO-SYS-MIB< • OLD-CISCO-SYSTEM-MIB • OLD-CISCO-TCP-MIB • OLD-CISCO-TS-MIB • RMON-MIB • RMON2-MIB • SMON-MIB • SNMP-COMMUNITY-MIB • SNMP-FRAMEWORK-MIB • SNMP-MPD-MIB • SNMP-NOTIFICATION-MIB • SNMP-PROXY-MIB • SNMP-TARGET-MIB • SNMP-USM-MIB • SNMP-VIEW-BASED-ACM-MIB • SNMPv2-MIB • TCP-MIB • UDP-MIB |

Table 8. SFP Transceivers

| Part Number | Specification | SFP Type | Max Distance | Cable Type | Temp Range* | DOM Support |
|--------------------------|----------------|----------|--------------|------------|-------------|-------------|
| GLC-FE-100FX-RGD= | 100BASE-FX | FE | 2km | MMF | IND | Yes |
| GLC-FE-100LX-RGD | 100BASE-LX10 | FE | 10km | SMF | IND | Yes |
| GLC-FE-T-I= | 100BASE-T | FE | 100m | Copper | IND | NA |
| GLC-FE-100FX= | 100BASE-FX | FE | 2km | SMF | COM | No |
| GLC-FE-100LX= | 100BASE-LX10 | FE | 10km | SMF | COM | No |
| GLC-FE-100EX= | 100BASE-EX | FE | 40km | SMF | COM | No |
| GLC-FE-100ZX= | 100BASE-ZX | FE | 80km | SMF | COM | No |
| GLC-FE-100BX-D= | 100BASE-BX10 | FE | 10km | SMF | COM | No |
| GLC-FE-100BX-U= | 100BASE-BX10 | FE | 10km | SMF | COM | Yes |
| GLC-SX-MM-RGD= | 1000BASE-SX | GE | 550m | MMF | IND | Yes |
| GLC-LX-SM-RGD= | 1000BASE-LX/LH | GE | 550m/10km | MMF/SMF | IND | Yes |
| GLC-ZX-SM-RGD= | 1000BASE-ZX | GE | 70km | SMF | IND | Yes |
| GLC-BX40-U-I= | 1000BASE-BX40 | GE | 40km | SMF | IND | Yes |
| GLC-BX40-D-I= | 1000BASE-BX40 | GE | 40km | SMF | IND | Yes |
| GLC-BX40-DA-I= | 1000BASE-BX40 | GE | 40km | SMF | IND | Yes |
| GLC-BX80-U-I= | 1000BASE-BX80 | GE | 80km | SMF | IND | Yes |
| GLC-BX80-D-I= | 1000BASE-BX80 | GE | 80km | SMF | IND | Yes |
| GLC-SX-MMD= | 1000BASE-SX | GE | 550m | MMF | EXT | Yes |

| Part Number | Specification | SFP Type | Max Distance | Cable Type | Temp Range* | DOM Support |
|--------------------------|-----------------|----------|--------------|------------|-------------|-------------|
| GLC-LH-SMD= | 1000BASE-LX/LH | GE | 550m/10km | MMF/SMF | EXT | Yes |
| GLC-EX-SMD= | 1000BASE-EX | GE | 40km | SMF | EXT | Yes |
| GLC-ZX-SMD= | 1000BASE-ZX | GE | 70km | SMF | EXT | Yes |
| GLC-BX-D= | 1000BASE-BX10 | GE | 10km | SMF | COM | Yes |
| GLC-BX-U= | 1000BASE-BX10 | GE | 10km | SMF | COM | Yes |
| CWDM-SFP-xxxx= (8 freq) | CWDM 1000BASE-X | GE | | SMF | COM | Yes |
| DWDM-SFP-xxxx= (40 freq) | DWDM 1000BASE-X | GE | | SMF | COM | Yes |
| SFP-GE-S= | 1000BASE-SX | GE | 550m | MMF | EXT | Yes |
| SFP-GE-L= | 1000BASE-LX/LH | GE | 550m/10km | MMF/SMF | EXT | Yes |
| SFP-GE-Z= | 1000BASE-ZX | GE | 70km | SMF | EXT | Yes |
| GLC-SX-MM= | 1000BASE-SX | GE | 550m | MMF | COM | No |
| GLC-LH-SM= | 1000BASE-LX/LH | GE | 550m/10km | MMF/SMF | COM | No |
| GLC-ZX-SM= | 1000BASE-ZX | GE | 70km | SMF | COM | Yes |
| GLC-TE= | 1000BASE-T | GE | 100m | Copper | EXT | NA |
| GLC-T= | 1000BASE-T | GE | 100m | Copper | COM | NA |

Note: For DOM support and for first software release supporting SFP, refer to http://www.cisco.com/en/US/products/hw/modules/ps5455/products_device_support_tables_list.html

MMF = multi-mode fiber

SMF = Single-mode fiber

Warranty Information

Warranty information is available at <http://www.cisco-servicefinder.com/warrantyfinder.aspx>.

Service and Support

Cisco is committed to reducing your total cost of ownership (TCO). We offer a portfolio of technical support services to help ensure that products operate efficiently, remain highly available, and benefit from the most up-to-date system software. The services and support programs described in Table 7 are available as part of the Cisco Desktop Switching Service and Support solution and are available directly from Cisco and through resellers.

Table 9. Cisco Services and Support Programs

| Advanced Services | | |
|---|--|---|
| <ul style="list-style-type: none"> • Cisco Total Implementation Solutions (TIS), available directly from Cisco • Cisco Packaged TIS, available through resellers • Cisco SMARTnet® and SMARTnet Onsite support, available directly from Cisco • Cisco Packaged SMARTnet support program, available through resellers • Cisco SMB Support Assistant | <ul style="list-style-type: none"> • Project management • Site survey, configuration, and deployment • Installation, test, and cutover • Training • Major moves, adds, and changes • Design review and product staging • 24-hour access to software updates • Web access to technical repositories • Telephone support through the Cisco Technical Assistance Center (TAC) • Advance replacement of hardware parts | <ul style="list-style-type: none"> • Supplements existing staff • Helps ensure that functions meet needs • Mitigates risk • Helps enable proactive or expedited issue resolution • Lowers TCO by taking advantage of Cisco expertise and knowledge • Reduces network downtime |

Cisco Capital

Financing to Help You Achieve Your Objectives

Cisco Capital can help you acquire the technology you need to achieve your objectives and stay competitive. We can help you reduce CapEx. Accelerate your growth. Optimize your investment dollars and ROI. Cisco Capital financing gives you flexibility in acquiring hardware, software, services, and complementary third-party equipment. And there's just one predictable payment. Cisco Capital is available in more than 100 countries. [Learn more](#).

For More Information

For more information about Cisco products, contact:

- United States and Canada: 800 553-6387
- Europe: 32 2 778 4242
- Australia: 612 9935 4107
- Other: 408 526-7209
- Cisco Industrial Ethernet 2000 (IE 2000) Series Switches:
<http://www.cisco.com/en/US/partner/products/ps12451/index.html>.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)