



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED TO PRODUCTION	8/27/01	R. CARRICK
B	ECN# 1528: REMOVED SCREWS, MALE SIDE, ADDED VIEW TO SHOW LABEL	10/1/03	T. CLARK
C	ECN# 1628: ADDED COMPONENT SPECIFICATION TABLE	12/31/03	T. CLARK
D	ECN 4547: REVISED SCREW LENGTH AND NEW FORMAT	2/10/10	D. FRISIello

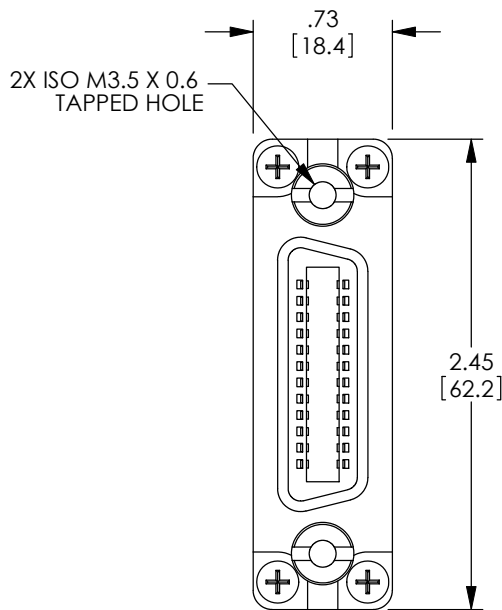

24 CONTACT
FEMALE GPIB CONNECTOR

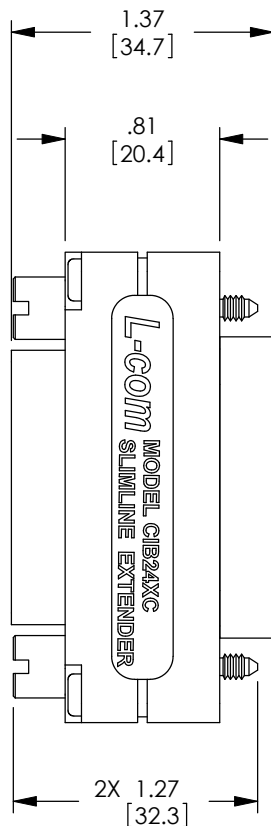


2X 1.27
[32.3]

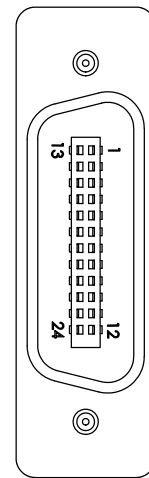

24 CONTACT
MALE GPIB CONNECTOR

2X ISO M3.5 X 0.6 THREAD

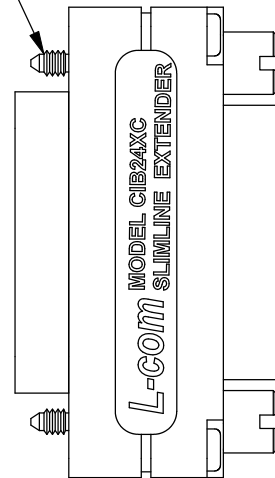

NOTES:

MATERIAL:

HOUSING: DIE-CAST ALUMINUM ALLOY.
CONNECTOR INSULATORS: GLASS-FILLED PBT, BLUE, UL94V-0 RATED.
CONNECTOR CONTACTS: 24X, COPPER ALLOY, RIBBON, .085" PITCH.
THUMBSCREWS: STEEL.

FINISH:

HOUSING: NICKEL PLATED.
CONNECTOR CONTACTS: 30μ INCHES GOLD PLATED OVER NICKEL.
THUMBSCREWS: BLACK OXIDE.

ELECTRICAL:

VOLTAGE RATING: 200 VOLTS.
CURRENT RATING: 1 AMP PER CONTACT AT 25°C.
INSULATION RESISTANCE: 1 GIGAOHMS

MISCELLANEOUS:

OPERATING TEMPERATURE RANGE: -40°C TO +85°C.
WIRED STRAIGHT THROUGH, PIN TO LIKE-NUMBERED PIN AND
MEETS ANSI/IEEE STD 488.1-1987.
TWO DUST CAPS PROVIDED FOR CONNECTORS (NOT SHOWN).
ALL DIMENSIONS ARE FOR REFERENCE ONLY.
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE
WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.02 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION 	APPROVALS DRAWN BY RON CARRICK CHECKED BY DOUG PARHAM APPROVED BY C. MCCORMICK	DATE 8/27/2001 8/27/2001 8/27/2001	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CATEGORY IEEE-488		PRODUCT DESCRIPTION GPIB SLIMLINE REVERSE ENTRY EXTENDER	
	SIZE A	FSCM NO. 43321	DWG. NO. CIB24XC	REV. D
	SCALE: NONE		CAD FILE: CIB24XC.SLDDRW	SHEET 1 OF 1