

EKI-9512-4GRX

EN50155 Layer 3 Management Ethernet Switch



Features

- M12 connector with IP67 rugged housing
- Complies with EN50155 & EN50121-3-2
- Wide nominal power input range: 24-110V_{DC}
- Operating power input range: 16.8-137.5V_{DC}
- Supports X-Ring Pro for rapid and predictable convergence
- Supports N-Key for quick configuration and backup
- Operating temperature: -40 ~ 75°C
- Provides Fast Ethernet & Full Giga Ethernet solution

Introduction

The EKI-9512E(G)-4GRX Ethernet switch is designed for railway applications with rugged housing and high EMC performance. It is a suitable networking solution for rolling stock and wayside applications. It provides M12 connectors for Ethernet/ console/ relay/ power-input(M23) connections to ensure tight and robust connectivity, guarantees reliable operation against environmental disturbances, and complies with IEC61373 vibration and shock for rolling stock applications. , and supports Layer 3 routing capabilities to facilitate the deployment of applications across networks, separating the subnet and also optimizing the security of on-board network. The EKI-9512E(G)-4GRX features IP67 housing and ample pitch connectors that can easily connect/ disconnect cables without interference; reducing human errors within the harsh and narrow industrial environments.

Specifications

Interface

- **Ethernet Port**
 - M12 4pin D-coded Female for Fast Ethernet (10/100BASE-T)
 - M12 8pin X-coded Female for Giga Ethernet (10/100/1000BASE-T)
- **Console Port**
 - M12 5pin A-coded Female
- **Relay Port**
 - M12 5pin A-coded Female with 2 relay outputs of 1A @ 24V_{DC}
- **Power Connector**
 - M23 connector

Physical

- **Enclosure**
 - Aluminum Shell
- **Protection Class**
 - IP67
- **Installation**
 - Wall Mount
- **Dimension**
 - 254 x 174 x 64.5 mm (W x H x D)

LED Display

- **System LED**
 - PWR1, PWR2, SYS, Alarm, R.M.
- **Port LED**
 - Data, PoE (For PoE model only)

Environment

- **Operating Temperature**
 - 40~75°C (-40~167°F)
- **Storage Temperature**
 - 40~85°C (-40~185°F)
- **Humidity**
 - 5~95% (non-condensing)

Power

- **Power Consumption**
 - 17 Watts (System)
- **Nominal Input Voltage**
 - 24/28/36/48/72/96/110V_{DC}
- **Operating Input range**
 - 16.8-137.5V_{DC}

Certification

- **Safety**
 - EN62368-1
- **EMC**
 - CE, EN55011/ 55032/ 55024; FCC Part 15 Subpart B class A
- **EMS**
 - EN61000-4-2(ESD); EN61000-4-3(RS); EN61000-4-4(EFT); EN61000-4-5(Surge); EN61000-4-6(CS)
- **Shock**
 - EN 61373
- **Vibration**
 - EN 61373
- **Railway**
 - EN50155, EN50121-2-3, 50121-1
- **Fire Protection**
 - EN45545-2
- **Other**
 - EN61000-6-4, EN61000-6-2

L2 Feature


- **L2 MAC Address**
 - 8K
- **Jumbo Frame**
 - 9KB
- **VLAN Group**
 - 256 (VLAN ID 1~4094)
- **VLAN Group**
 - 802.1Q, GVRP, 802.1ad VLAN stacking
- **Port Mirroring**
 - Per port, Multi-source port (4 Mirroring sessions Max.)
- **IP Multicast**
 - IGMP snooping v1/v2/v3, MLD snooping(256 Multicast Entries Max.)

Layer 3 Feature

- **Routing Feature**
 - Static Route
- **Max. Host Entries**
 - 512
- **NAT**
 - S-NAT, D-NAT

Dimensions

Unit: mm [inch]

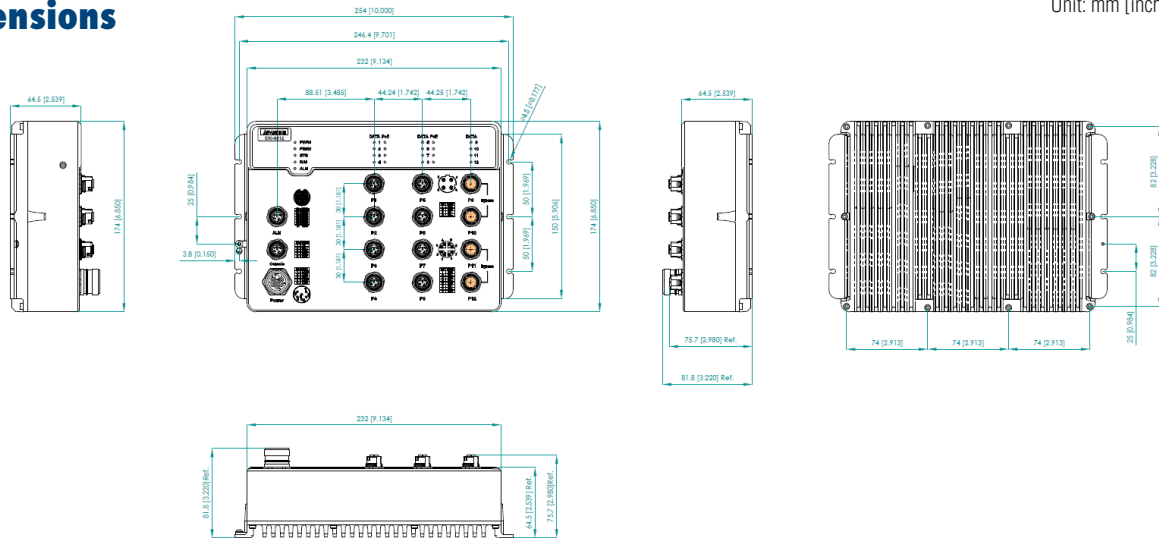

- **Storm Control**
 - **Redundant Protocol**
- Broadcast, Multicast, Unknown Unicast
IEEE 802.1D(STP), IEEE802.1s(MSTP),
IEEE802.1w(RSTP), X-Ring Pro, X-Chain, Dual
homing, Coupling

Quality of Service

- **QoS Function**
 - **Rate Limit**
 - **Max Priority Queues**
- Scheduling(STRICT/WRR), Port Priority, 802.1p,
DSCP, IP TOS/ precedence
Ingress/ Egress Rate limit
8

Security

- **Port Security**
 - **Authentication**
- Static MAC, MAC violation notice, port-based loop
detection
802.1x (Port-based, MAC-based), RADIUS

Management Feature

- **DHCP**
 - **Access**
 - **Security Access**
 - **Software Upgrade**
 - **NTP**
 - **Other**
- Client, Server, Option66/67/82, Port IP-Binding SNMP
v1/v2c/v3, WEB, Telnet, Console, RMON, Standard
MIB, Private MIB
SSH (v2), SSL (v2), HTTPs
TFTP, HTTP, Dual Image
NTP server/client, SNTP
IPv4, IPv6, Modbus TCP, N-Key for config file backup/
restore

Accessories

PN		Description
OPT1-M12-CRP-4MD		Phoenix Contact M12 D-code 4 pin Male crimp type connector
OPT1-M12-CRP-8MX		Phoenix Contact M12 X-code 8 pin Male crimp type connector
OPT1-M12-CRP-5MA		Phoenix Contact M12 A-code 5 pin Male crimp type connector
OPT1-M12C-4MD-150R		M12 D-code 4 pin Male to RJ45, cable length:1.5m
OPT1-M12C-8MX-150R		M12 X-code 8 pin Male to RJ45, cable length:1.5m
OPT1-M12C-5MA-DB9		M12 A-code 5 pin Male to DB9 console, cable length:1.5m
OPT1-M23C-6FH-100		M23 Female to 1m cable

Ordering Information

- **EKI-9512E-4GRX** Layer 3 managed Ethernet Switch with 8 x Fast Ethernet and 4 x Giga Ethernet ports
- **EKI-9512G-4GRX** Layer 3 managed Ethernet Switch with Full Giga Ethernet ports