

# QuMax for Advantech ICR-20xx & ICR-24xx

**INTEGRATED MULTI-BAND 5G DIRECTIONAL ANTENNA + POE SPLITTER + PLACE TO INSTALL ADVANTECH ICR-20xx & ICR-24xx (ALL-IN-ONE)**

QuMax antenna for **Advantech ICR-20xx & ICR-24xx** router is a perfect outdoor device for improving the signal in rural/suburban and locations where the mobile signal is weak. It has embedded directional 5G antenna. If you use ICR-20xx or ICR-24xx with QuMax antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.




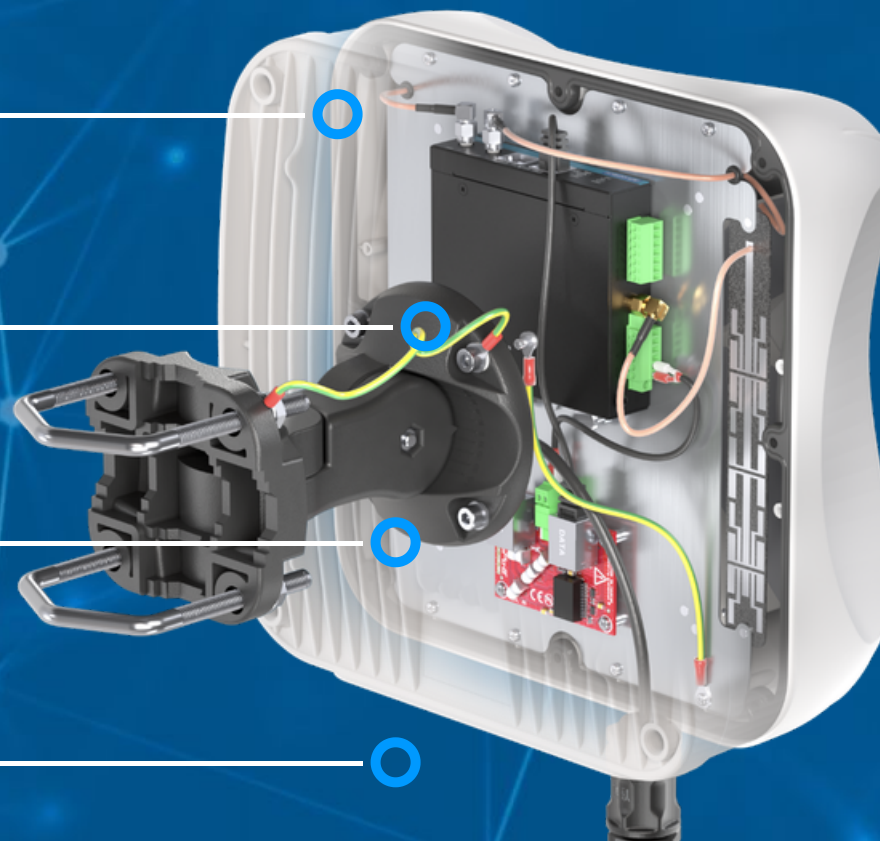
 OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67

 MOUNTING SYSTEM WITH TWO PLANES, 60 DEGREES REGULATION

 WIDE BAND 600-6000MHZ, 5G TECHNOLOGY

 ANTENNA PERFECTLY MATCHED WITH THE ADVANTECH ICR-20XX & ICR-24XX

 ALL ANTENNAS AND ADVANTECH ROUTER INTEGRATED IN ONE ENCLOSURE



## 5G / LTE ANTENNA SPECIFICATION

<b>FREQUENCY</b>	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.6 GHz 4.7 - 6.0 GHz
<b>GAIN</b>	617 - 960 MHz : 6 dBi 1.7 - 2.7 GHz : 7 dBi 3.3 - 4.6 GHz : 7 dBi 4.7 - 6.0 GHz : 5.5dBi
<b>SUPPORTED LTE BANDS</b>	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
<b>SUPPORTED 5G BANDS</b>	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n65, n66, n67, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
<b>VSWR</b>	<2.00, max <3.00
<b>BEAMWIDTH</b>	80°/80° ±15°
<b>POLARIZATION</b>	X (±45degrees)
<b>IMPEDANCE</b>	50 Ω

## WI-FI SPECIFICATION

<b>FREQUENCY</b>	2.4 - 2.5 GHz 5.0 - 7.2 GHz
<b>GAIN</b>	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
<b>VSWR</b>	< 1.50, max < 2.00
<b>BEAMWIDTH</b>	360°/25°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 $\Omega$

## MECHANICAL SPECIFICATION

<b>MATERIALS</b>	ABS, aluminum, PTFE, fiberglass
<b>CONNECTOR TYPE</b>	RJ45
<b>INGRESS PROTECTION</b>	IP67
<b>DIMENSIONS</b>	26.9 x 26.95 x 17.7 cm 10.6 x 10.6 x 7 inch
<b>WEIGHT</b>	2.8 kg 6.17 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 80°C From -40°F to 176°F
<b>MAST DIAMETER</b>	25-60mm 0.98-2.36 inch

## FREQUENCY BANDS

LTE / 4G


617 MHz	1	2	3	4	5	7	8	6000 MHz
	9	10	12	13	14	17	18	
	19	20	22	25	26	27	28	
	29	30	33	34	35	36	37	
	38	39	40	41	42	43	44	
	46	47	48	49	52	53	65	
	66	67	68	69	71	85	103	
	106							

5G


617 MHz	n1	n2	n3	n5	n7	n8	n12	6000 MHz
	n13	n14	n18	n20	n25	n26	n28	
	n29	n30	n34	n38	n39	n40	n41	
	n46	n47	n48	n53	n65	n66	n67	
	n71	n77	n78	n79	n80	n81	n82	
	n83	n84	n85	n86	n89	n90	n95	
	n97	n98	n100	n101	n255			

# PLOTS


## LTE VSWR

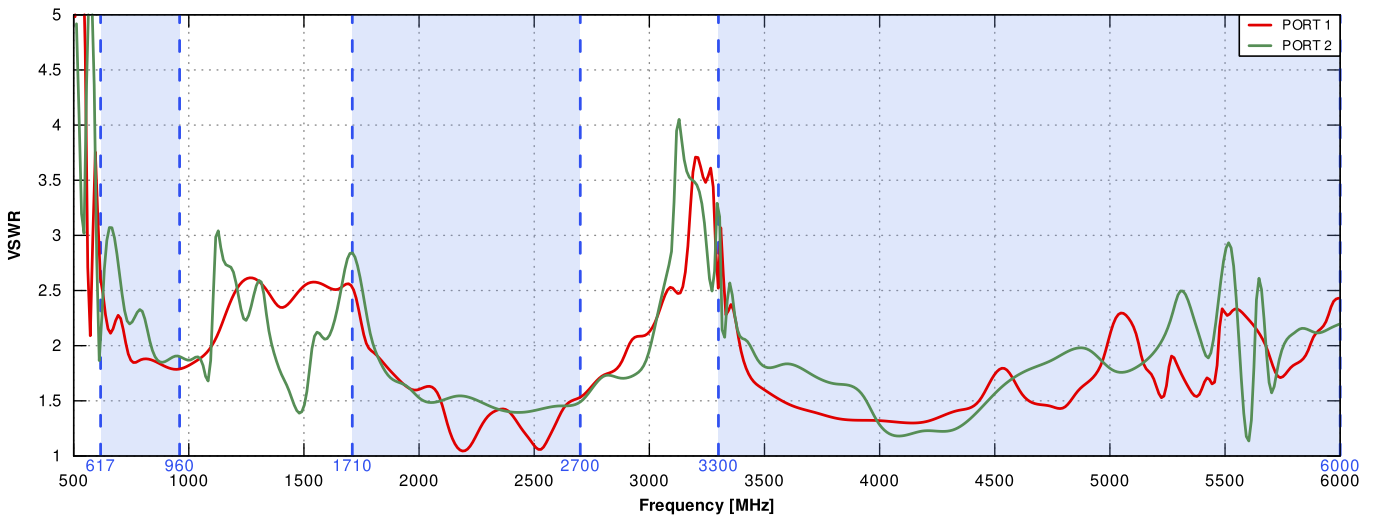


## LTE Gain

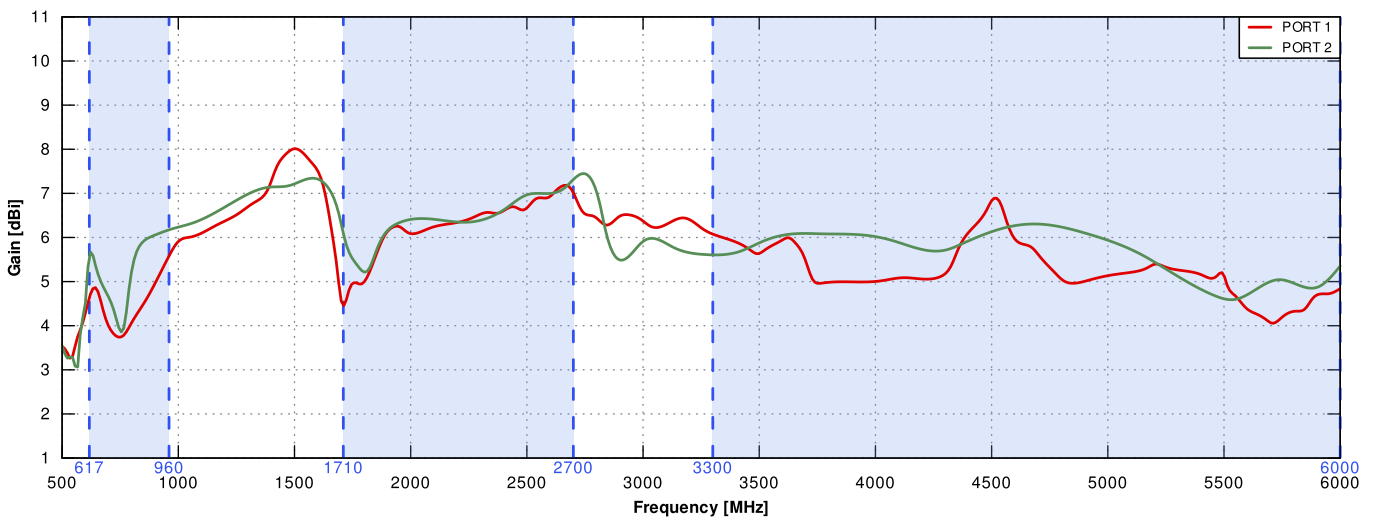


### Wi-Fi VSWR

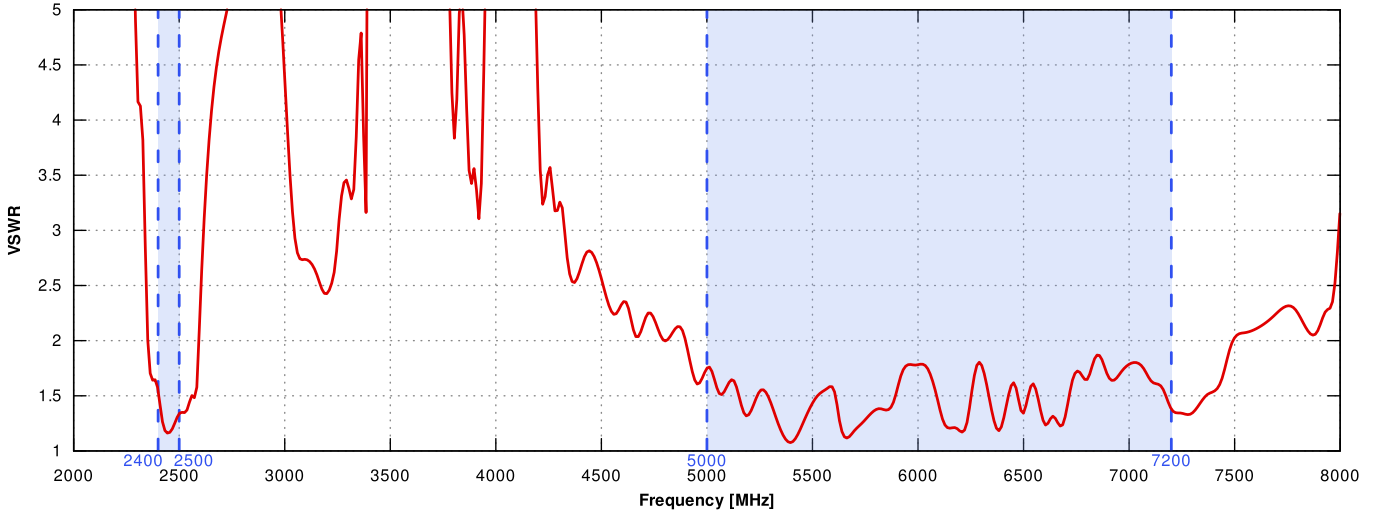


### Wi-Fi Gain

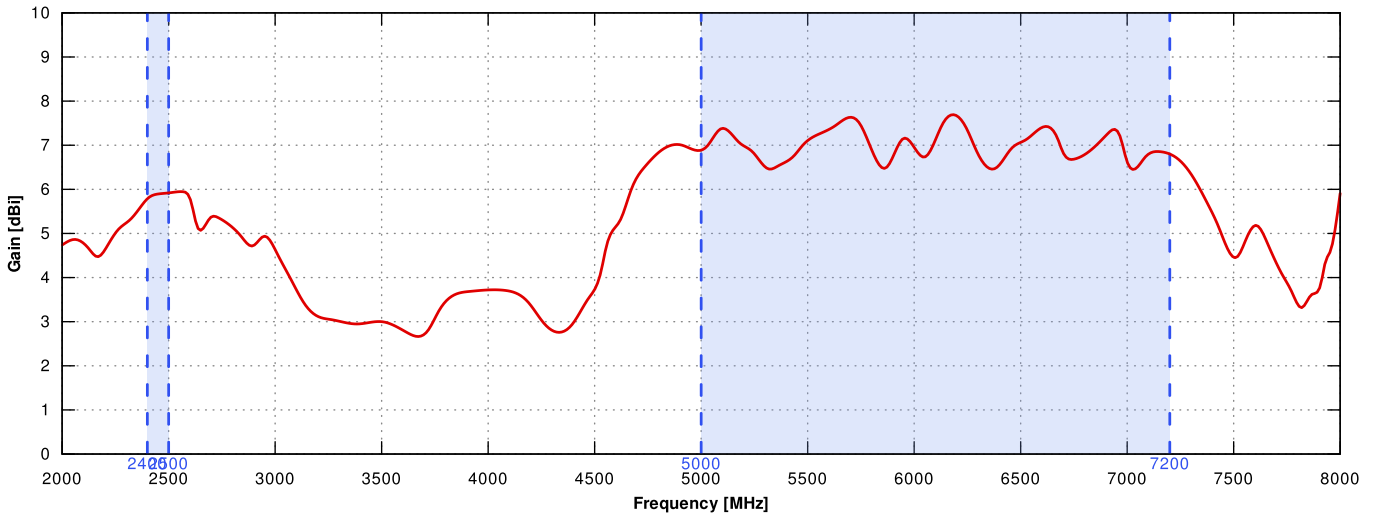


PORT 1 - 5G/LTE from 650MHz to 950MHz

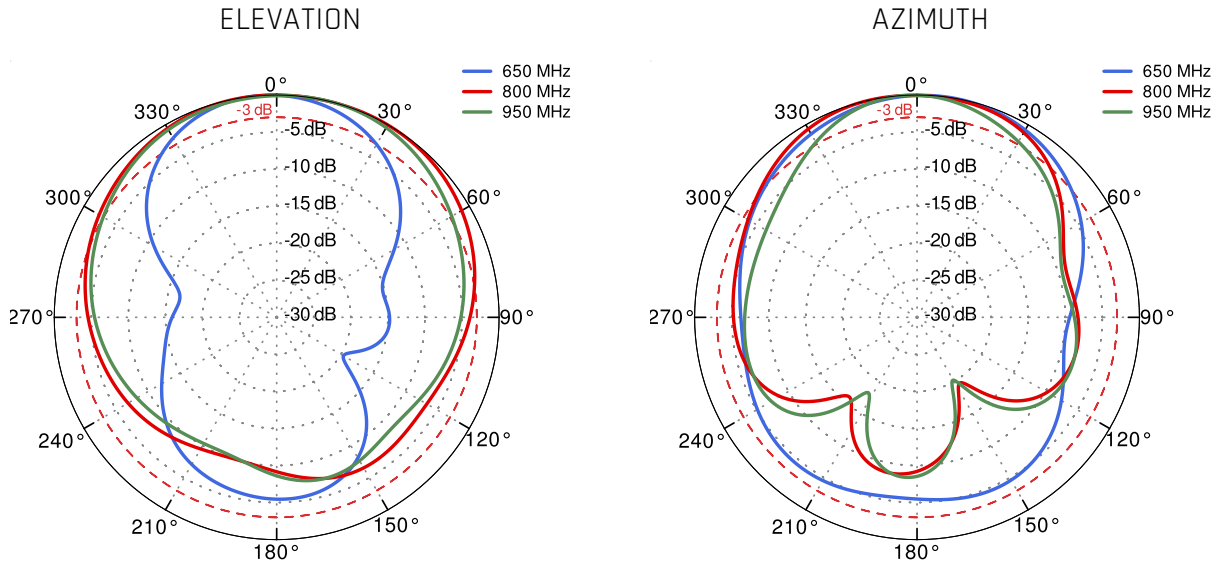


PORT 1 - 5G/LTE from 1.71GHz to 2.17GHz

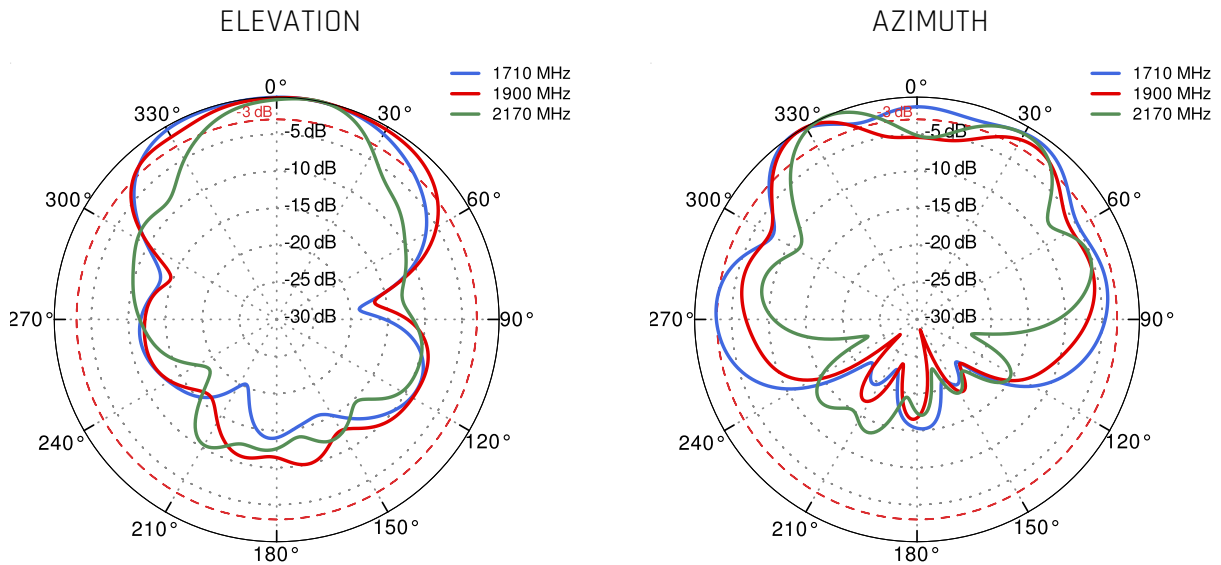

PORT 1 - 5G/LTE from 2.3GHz to 2.7GHz

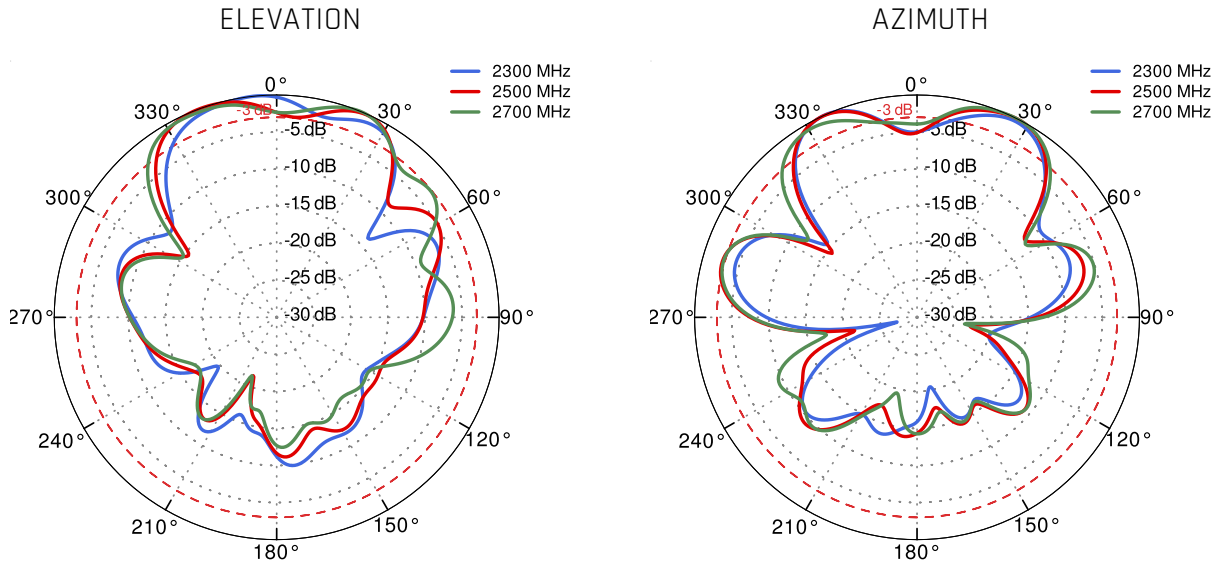


PORT 1 - 5G/LTE from 3.3GHz to 3.8GHz

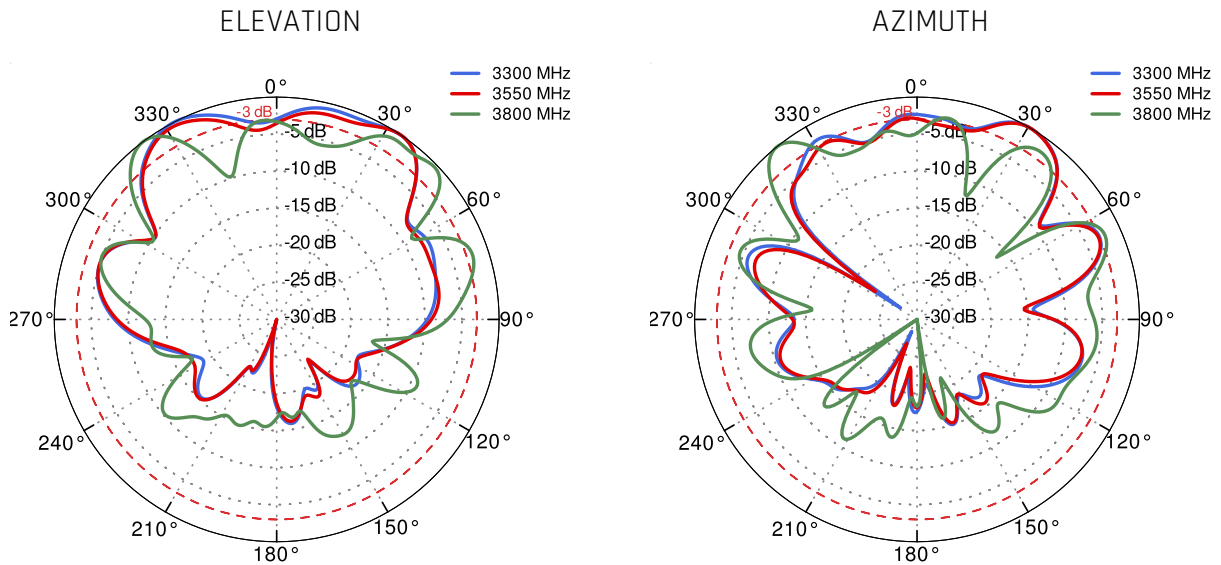





PORT 1 - 5G/LTE from 4.2GHz to 4.6GHz

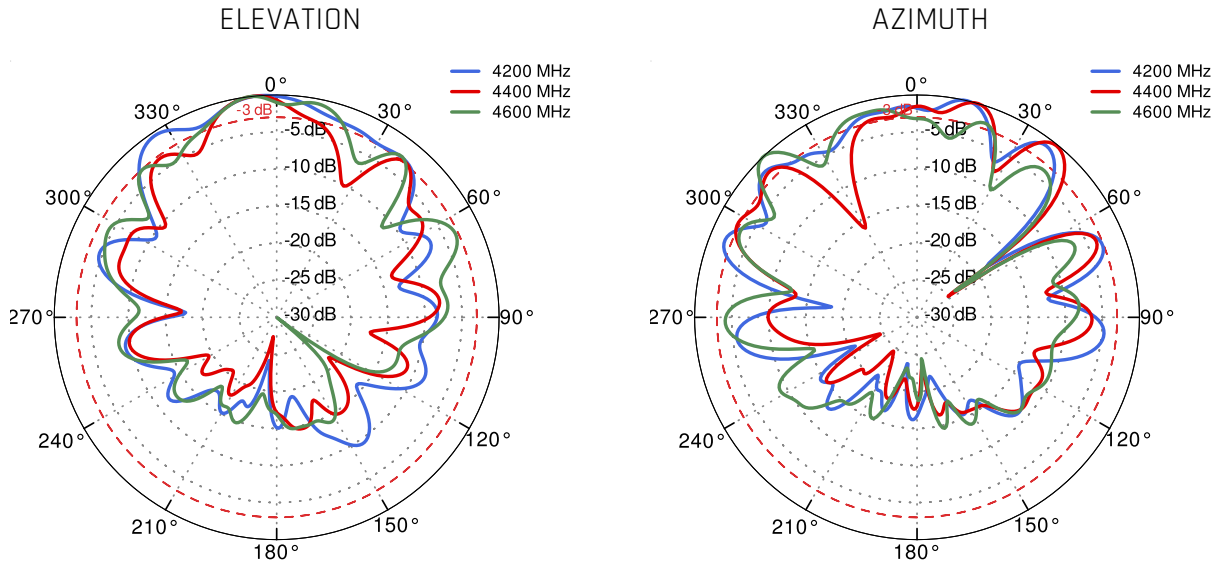


PORT 1 - 5G/LTE from 5.0GHz to 5.9GHz

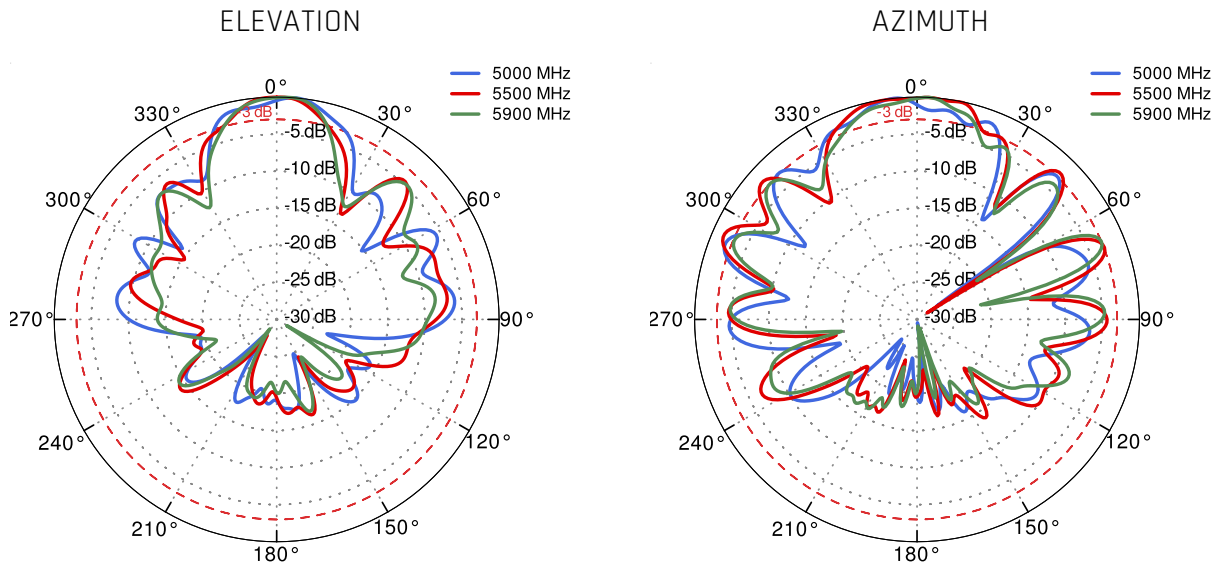


PORT 2 - 5G/LTE from 650MHz to 950MHz

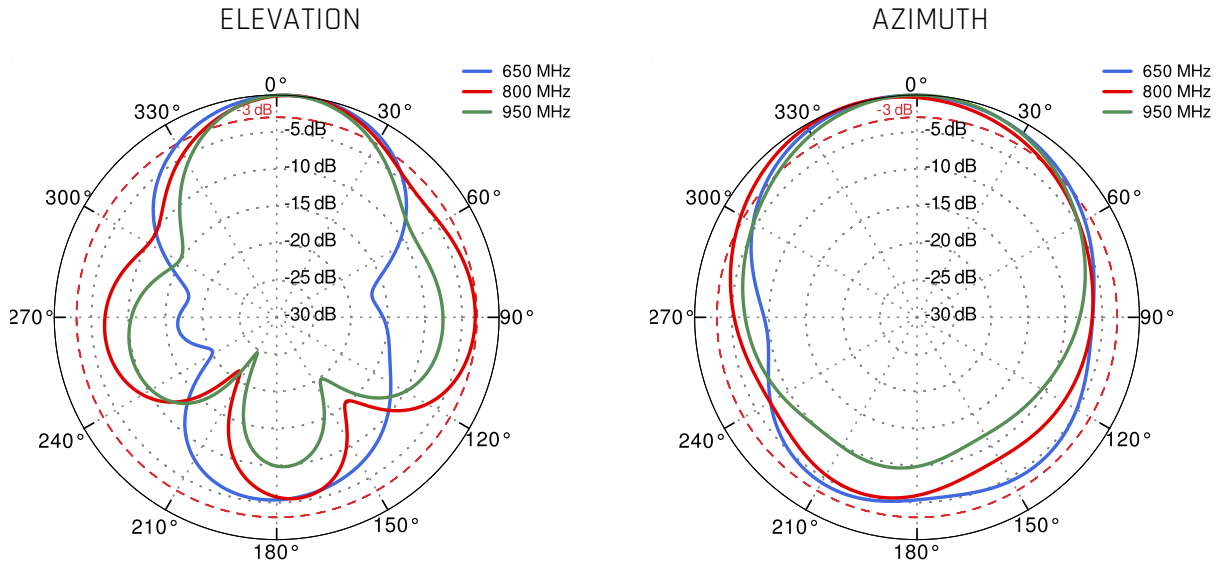


PORT 2 - 5G/LTE from 1.71GHz to 2.17GHz

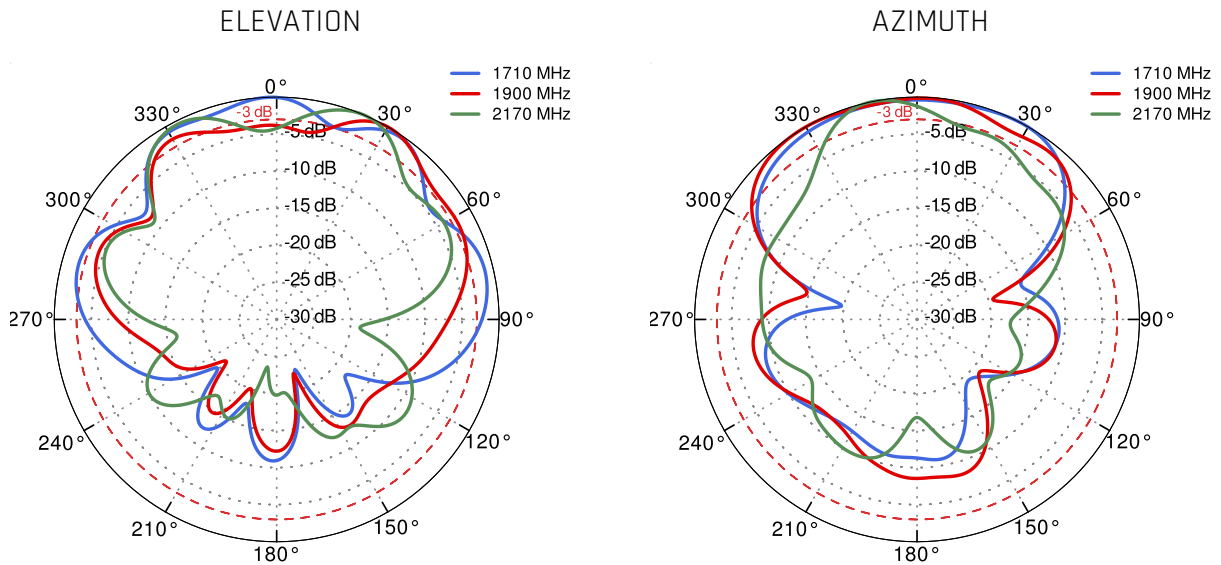


PORT 2 - 5G/LTE from 2.3GHz to 2.7GHz

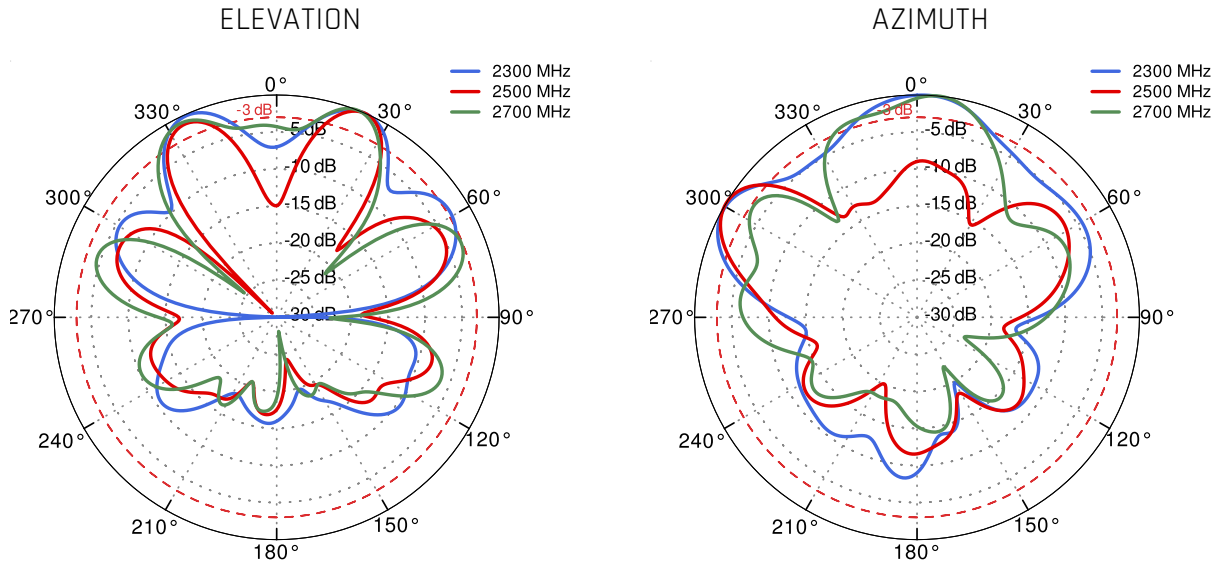


PORT 2 - 5G/LTE from 3.3GHz to 3.8GHz

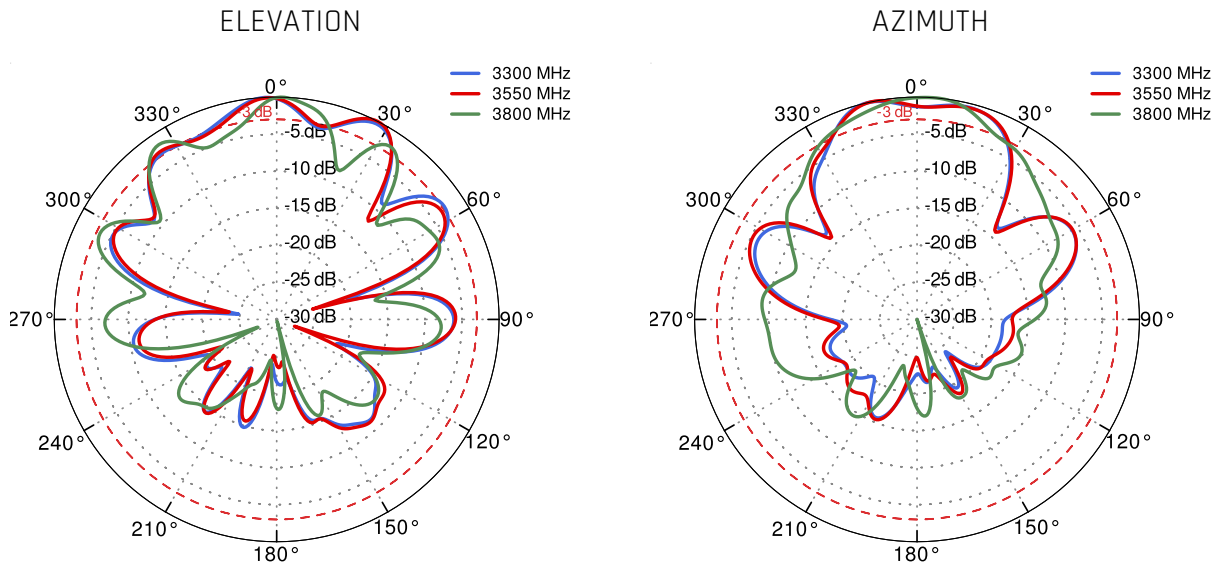


PORT 2 - 5G/LTE from 4.2GHz to 4.6GHz

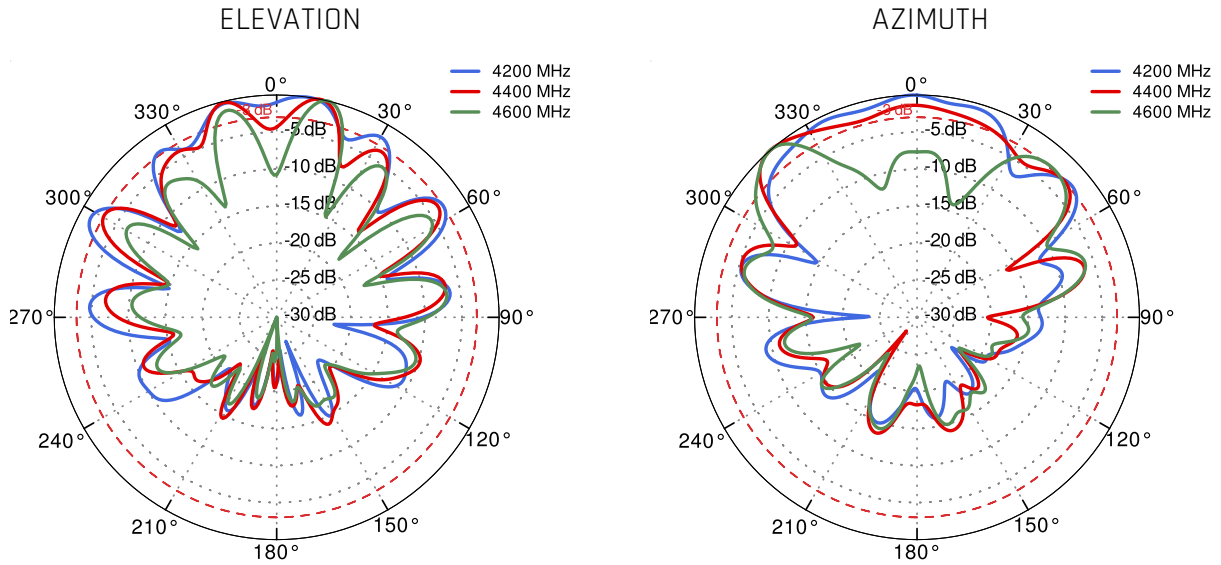

PORT 2 - 5G/LTE from 5.0GHz to 5.9GHz

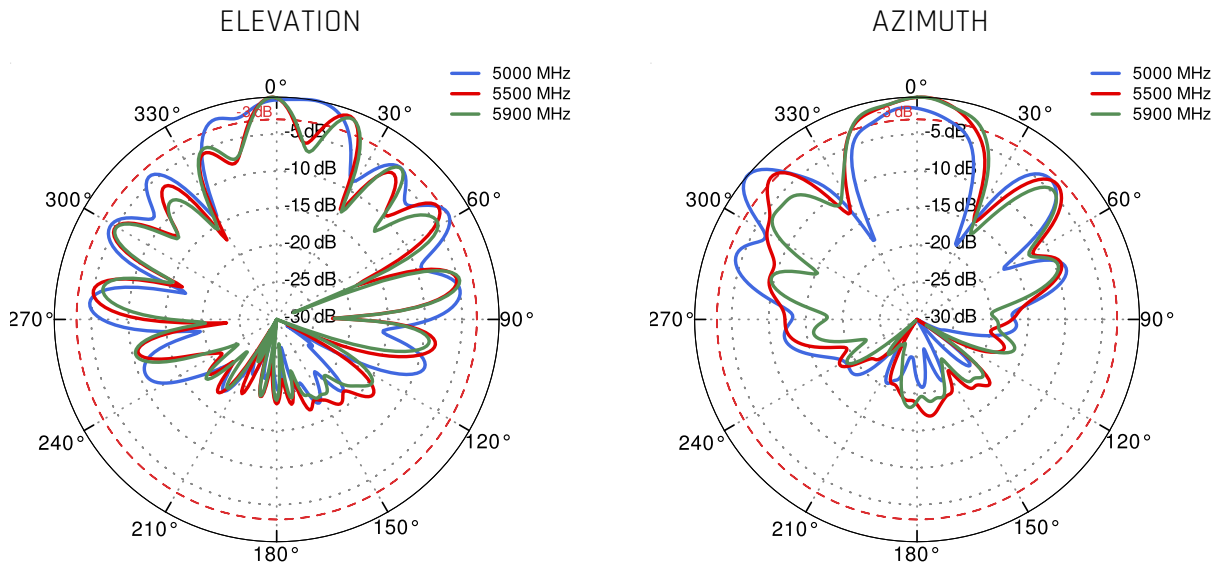

Wi-Fi From 2.4 GHz to 6.5 GHz

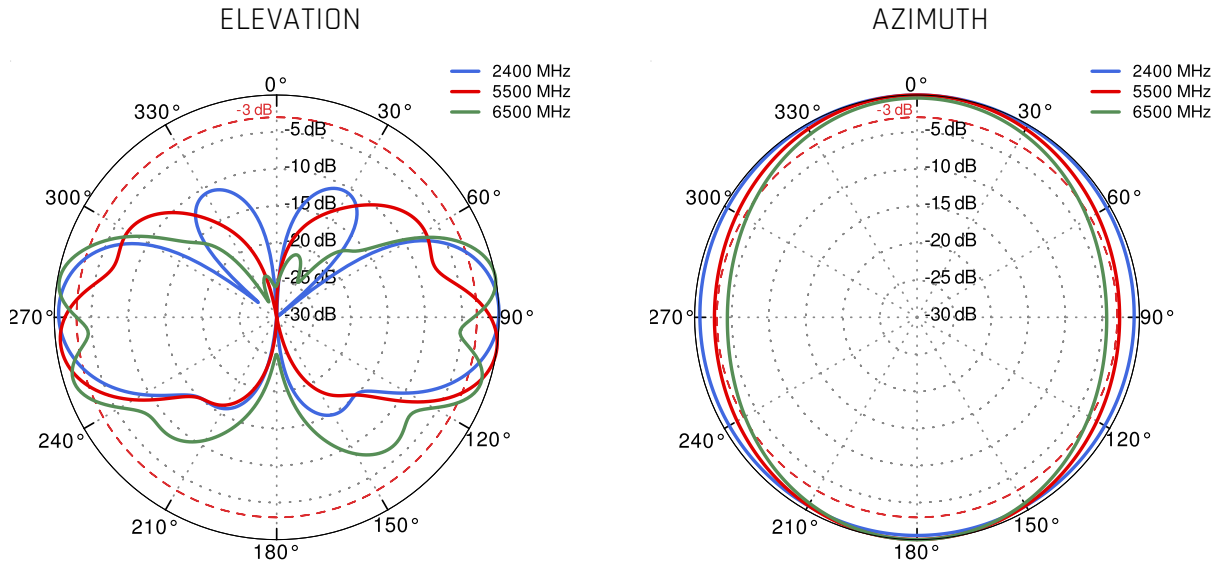

**DIMENSIONS**

