

QuMax for Robustel R3000 LoRa

INTEGRATED LORA ANTENNA + MULTI-BAND LTE OMNI ANTENNA + POE SPLITTER + PLACE TO INSTALL ROBUSTEL R3000 LG (ALL-IN-ONE)

QuMax all-in-one antenna for Robustel R3000 LG router is the perfect choice for extending the reach and reliability of your Long Range (LoRa) wireless communication networks. It has embedded omni LTE and LoRa antenna. If you use R3000 LG with QuMax antenna, you get an integrated complete solution with embedded gateway and multi band antennas in one enclosure.

The set contains a <u>Passive PoE splitter</u>, allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.




















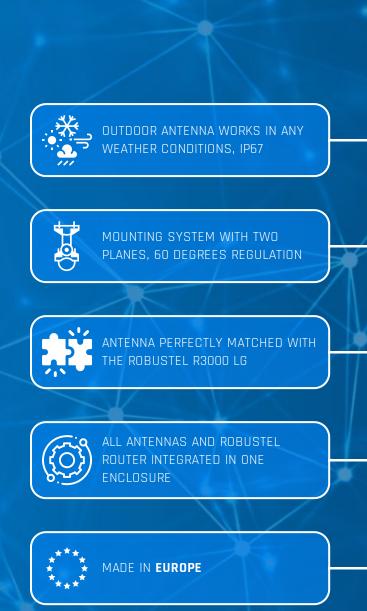





(* LORA ANTENNA SPECIFICATION

FREQUENCY	868 MHz (EU868, IN865, RU864)					
GAIN	8.5 dBi					
vswr	<1.80, max <2.00					
BEAMWIDTH	75°/75° ±10°					
POLARIZATION	Vertical					
IMPEDANCE	50 Ω					
FRONT TO BACK	>17 dB					

(* LTE ANTENNA SPECIFICATION


FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 3 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 33, 34, 35, 36, 37, 38, 39, 44, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n86, n89, n95, n98, n100, n101, n256
VSWR	<1.50, max <2.50
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω



(MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE					
CONNECTOR TYPE	RJ45					
INGRESS PROTECTION	IP67					
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch					
WEIGHT	1.5 kg 3.31 lbs					
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F					
MAST DIAMETER	25-60mm 0.98-2.36 inch					

(* FREQUENCY BANDS

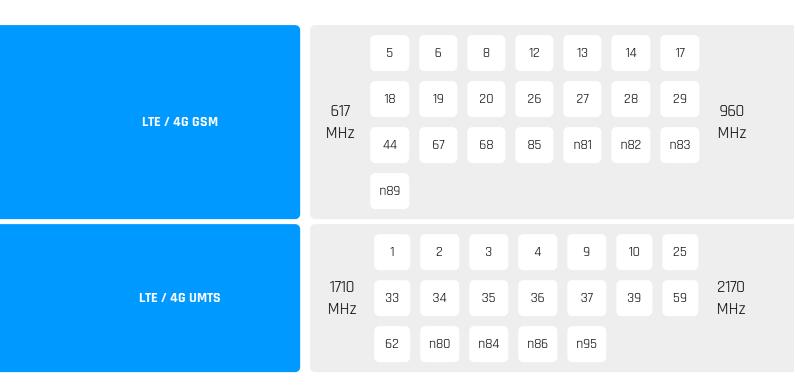





LTE / 4G WCS DARS	2300 MHz	30	40					2400 MHz
LTE / 4G	2400 MHz	7	38	41	53	69	n90	2700 MHz

(* PLOTS

LTE VSWR —

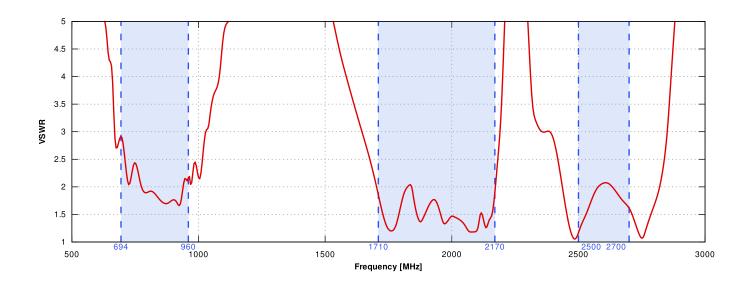


LTE Gain ———

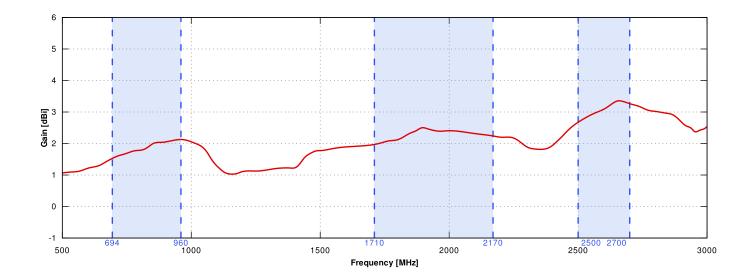




LoRa VSWR

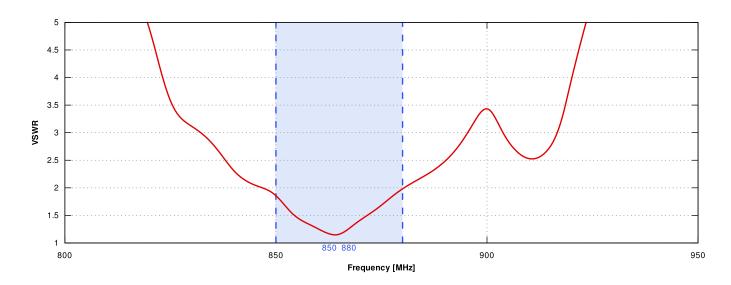


LoRa Gain

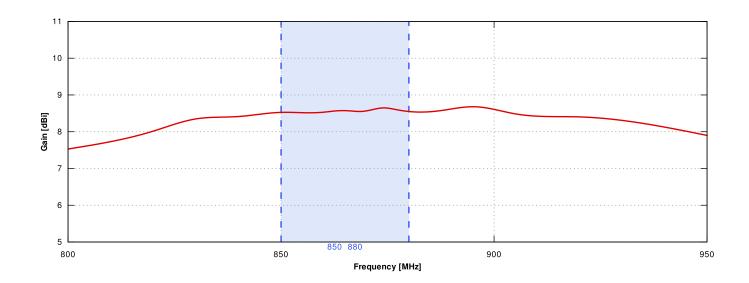




LTE From 700MHz to 900MHz

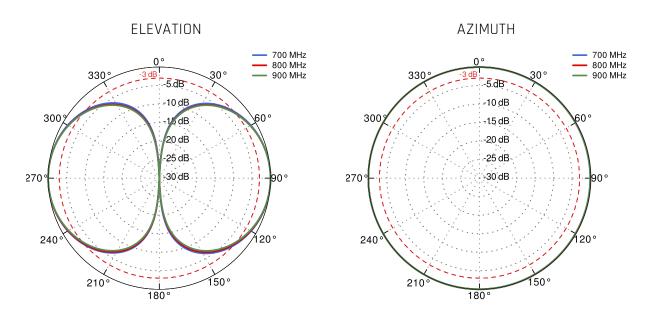


LTE From 1.71GHz to 2.17GHz

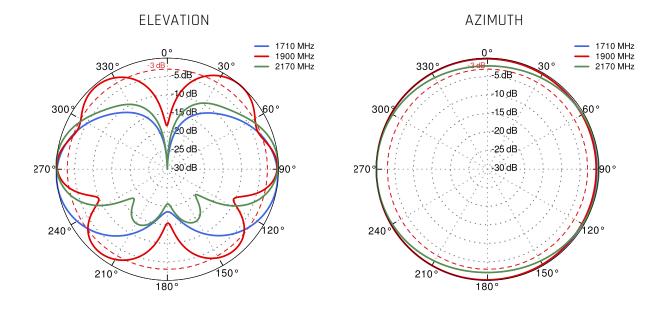




LTE From 2.3GHz to 2.7GHz

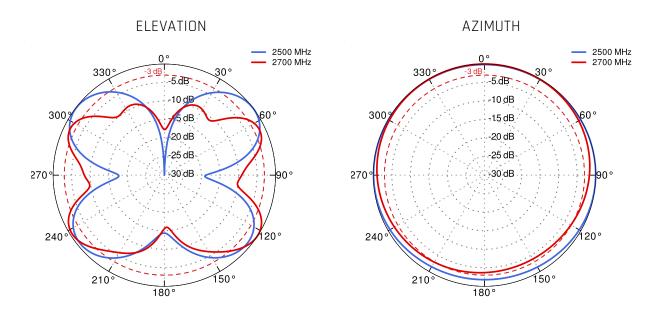



LoRa 868 MHz

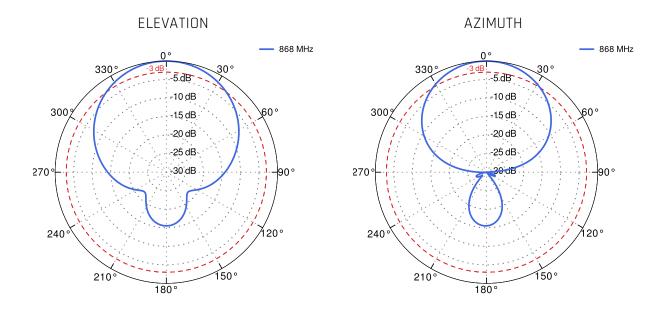



(* DIMENSIONS

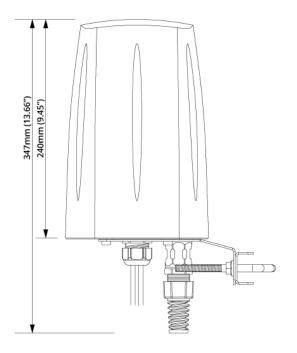

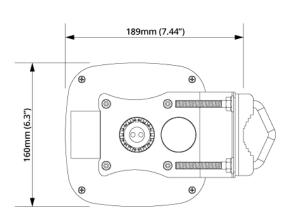



Sales email: sales@quwireless.com **Support email:** support@quwireless.com

WWW.QUWIRELESS.COM

Tel: +48 513 900 416

Website: www.quwireless.com

7



Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland