

Q.raxx XL A101 SV

Universal Measurement Module


Q.raxx XL is a new addition to the Q.series product family - the ideal 19" rackmount DAQ solution for applications that require high channel density and custom sensor terminations. Q.raxx XL DAQ systems can utilize an integrated, high-performance controller for communication, control, and data logging purposes. With a controller, multiple Q.raxx XL systems can be synchronized to each other allowing for efficient DAQ distribution with low jitter and gradual expansion up to thousands of channels.

- High Density
up to 13 I/O modules per Q.raxx 3U chassis with up to 16 channels per I/O module
- User Friendly
front panel indicators for module status, power, and input range error
- Fully Customizable
multiple front panel termination options available
- Maximum Flexibility
parallel communication available in TCP/IP, CAN, PROFIBUS, Modbus, and EtherCAT
- Gantner's Quality Standard
integrated filtering, galvanic isolation & signal/sensor conditioning per channel



Key Features


- 2 Digital inputs or outputs
Status, trigger, tare, alarm, command
- 2 Universal analog input channels
Voltage, current, resistance, potentiometer, RTD, thermocouple, strain gage (full-, half-, and quarter-bridge configuration), IEPE
- 3-Way galvanic isolation
Channel to channel, channel to power supply, and bank
- Signal conditioning
16 virtual channels, linearization, digital filter, average, scaling, min/max storage, RMS, arithmetic, alarm
- Sensor supply for each channel
- High-accuracy digitization
24-bit ADC, 100 kHz sample rate per channel

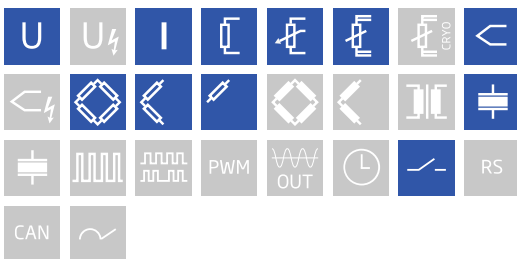

Q.raxx XL A101 SV

Universal Measurement Module


Block diagram

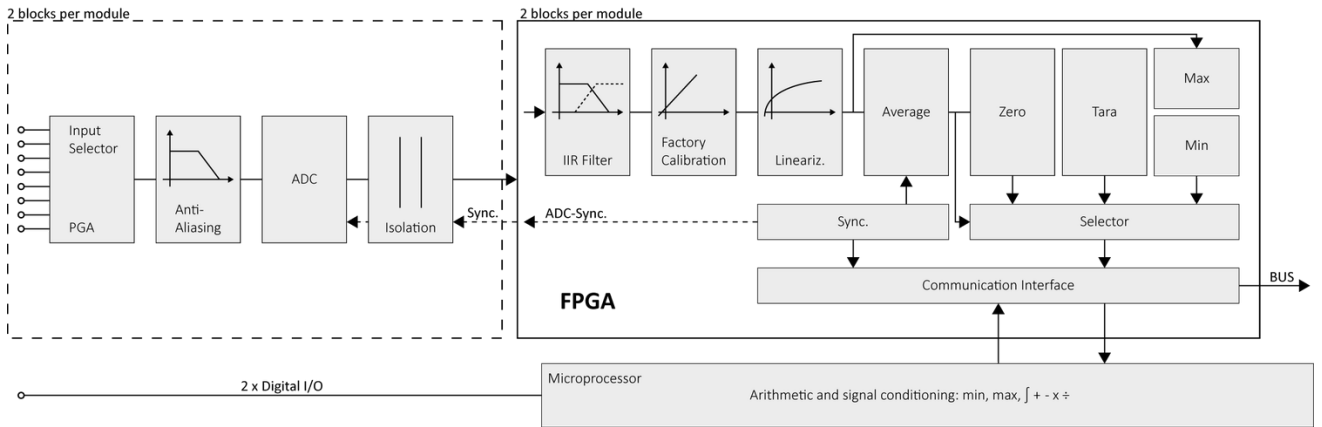



Technical Data

Terminal assignment DSub 15HD

- 1 SV+
- 2 SGND
- 3 60V
- 4 U_{Exc}
- 5 A_{in} 1
- 6 A_{in} 2
- 7 A_{in} 3
- 8 A_{in} 4
- 9 GND
- 10 IEPE
- 11 TEDS
- 12 DIO
- 13 -
- 14 -
- 15 -



- 1 SV+
- 2 SGND
- 3 60V
- 4 U_{Exc}
- 5 A_{in} 5
- 6 A_{in} 6
- 7 A_{in} 7
- 8 A_{in} 8
- 9 GND
- 10 IEPE
- 11 TEDS
- 12 DIO
- 13 -
- 14 -
- 15 -

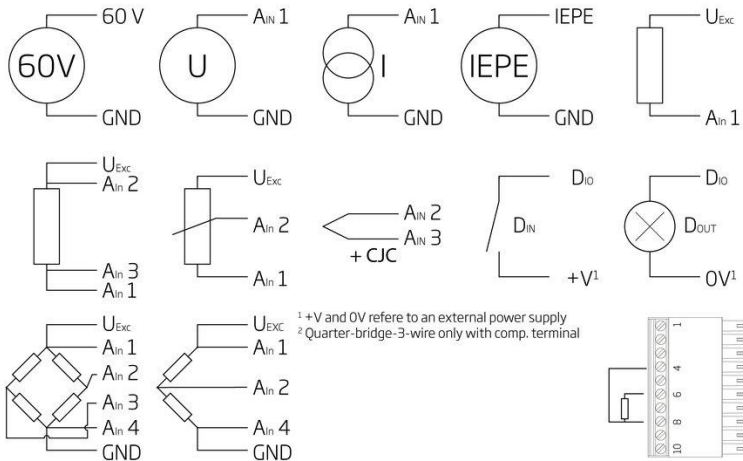

Analog Input

Channels	2
Isolation voltage	500 VDC channel to channel to power supply channel to bus ¹

¹ noise pulses up to 1000 VDC, continuous up to 250 VDC

Measurement Mode Voltage

	Range	max. Error	Resolution
	±60 V	±15 mV	7.2 µV
	±10 V	±2 mV	1.2 µV
	±1 V	±200 µV	120 nV
	±100 mV	±20 µV	12 nV
Input impedance >10 MΩ	Range ±10 V	Range ±60 V	
	>1 MΩ	>3 MΩ	
Long-term drift at input range ±1 V	<20 µV / 24 h	<200 µV / 8000 h	
Temperature influence at input range ±1 V	Offset drift		Gain drift
	<50 µV / 10 K	<0.01 % / 10 K	
Signal-to-noise ratio	>90 dB at 1 kHz	>120 dB at 1 Hz	

Measurement Mode Current

	Range	max. Error	Resolution
Internal shunt resistor 50 Ω	±25 mA	±5 µA	3.0 nA
Long-term drift	<0.5 µA / 24 h	<5 µA / 8000 h	
Temperature influence	Offset drift		Gain drift
	<1 µA / 10 K	<0.025 % / 10 K	

Measurement Mode Resistance / RTD

	Range	max. Error	Resolution
Resistance, 2-wire	100 kΩ	±100 Ω	12 mΩ
Resistance, 2- and 4-wire	4 kΩ	±1 Ω	0.5 mΩ
Resistance, 2- and 4-wire	400 Ω	±0.1 Ω	48 µΩ
Pt100, 2- and 4-wire	-200 to +850°C	±0.25°C	0.2 m°C
Pt1000, 2- and 4-wire	-200 to +850°C	±1°C	0.2 m°C
Long-term drift	<0.01°C / 24 h	<0.1°C / 8000 h	
Temperature influence	Offset drift (range 400 Ω)		Gain drift
	<10 mΩ / 10 K	<0.025 % / 10 K	

Measurement Mode Potentiometer, Relative Measurement

Allowable potentiometer resistance	1 Ω to 10 kΩ		
Long-term drift	<0.01 % / 24 h	<0.1 % / 8000 h	
Temperature influence	Offset drift (Range 1)		Gain drift
	<0.0001 / 10 K	<0.02 % / 10 K	

Measurement Mode Bridge

Bridge configuration(s)	half- and full-bridge, (5-/6-wire), quarter-bridge with completion terminal, (3-wire)		
Accuracy class	0.05		
Bridge resistance	>100 Ω		
Bridge excitation	2.5 VDC, nominal		
Measurement range	±2.4 mV/V	±20 mV/V	±500 mV/V
Long-term drift	<0.12 μV/V / 24 h	<1.2 μV/V / 8000 h	
Temperature influence	Offset drift (Range 2.4 mV/V)	Gain drift	
	<0.2 μV/V / 10 K	<0.05 % / 10 K	

Measurement Mode Thermocouple

Deviation in the relevant Temperature range	Type	Range	Adjusted with cold junction compensation	Not adjusted, with CJC terminal
	Type B	400°C to 1820°C	< ±1.5 °C	< ±2.5°C
	Type E, J, K	-100 to 1000°C	< ±0.7°C	< ±1.2°C
	Type E	-270°C to 1000°C	< ±1°C	< ±1.2°C
	Type K	-270°C to 1372°C	< ±1°C	< ±1.2°C
	Type L	-200°C to 900°C	< ±0.7°C	< ±1.2°C
	Type N	-100°C to 1000°C	< ±0.7°C	< ±1.2°C
	Type N	-270°C to 1300°C	< ±1°C	< ±1.2°C
	Type R, S	-50°C to 1768°C	< ±1.2°C	< ±1.5°C
	Type T, U	-100°C to 400°C	< ±0.7°C	< ±1.2°C
	Type T	-270°C to 400°C	< ±1°C	< ±1.2°C
Input impedance	> 10 MΩ			
Long-term drift	<0.1°C / 24 h		<0.2°C / 8000 h	
Temperature influence	Offset drift		Gain drift	
	<0.1°C / 10 K		<0.02% / 10 K	
Uncertainty CJC	<0.3°C			

Measurement Mode IEPE Sensor

Error	Range	max. Error	Resolution
	±10 V	±10 mV	1.2 μV
	±1 V	±1 mV	120 nV
Supply	constant current 4 mA		
Input frequency range	0.5 Hz to 20 kHz		
Temperature influence	Offset drift (range 10 V)	Gain drift	
	<10 μV / 10 K	<0.025 % / 10 K	

Q.raxx XL A101 SV

Universal Measurement Module

Digital In-/Outputs

Channels	2 (1 digital I/O per channel)
Response time	0.2 ms
Input	status, tare, reset
Input voltage / input current	max. 30 VDC / max. 0,5 mA
Lower / upper threshold	< 2.0 V (low) / > 10 V (high)
Output	status, alarm
Contact	open drain p-channel MOSFET
Load capacity	30 VDC / 100 mA (ohmic load)

Sensor excitation

Channels	2 (not galvanic isolated)
Voltage	3.3 V up to 24 V (Max. $V_S - 3V$)
	Accuracy: $\pm 3\%$ @ 100 mA
	Resolution: 10 mV
Current limit	50 mA up to 100 mA
	Accuracy: $\pm 5\%$
	Resolution: 100 μ A
Load regulation	< 3% @ 3.3 V up to 12 V < 1% @ 12 V up to 24 V
Noise	< 5 mV (RMS)

Analog to Digital Conversion

Resolution	24-bit
Update rate	100 kHz (measurement thermocouple 8 Hz)
Modulation method	Sigma-Delta
Anti-aliasing filter	20 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 10 kHz (adjustable via software)
Averaging	configurable or automatic according to the selected data rate

Power Supply

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx.. 2 W
Input voltage influence	< 0.001 %/V
## Sensor-excitation## SV	20 V up to 30 V

Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5% to 95% at 50°C, non-condensing

Q.raxx XL A101 SV

Universal Measurement Module

Remarks

Are subject to a warm-up period of at least 45 minutes

in a controlled electromagnetic environment¹

With configuration: Low-pass 10Hz²

Specifications subject to change without notice

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 128 x 120mm
Weight	approx. 200 g

Ordering Information

Article number	804020
----------------	--------

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com