

## Q.bloxx A128

### High Isolation Module for Dynamic High Voltages



The Q.series has been designed for the demanding measurements found in today's industrial measuring and testing environments. Applications range from single, stand-alone solutions to networked, multi-channel systems in real-world areas such as component testing, engine testing, materials testing and structural monitoring.



The range and flexibility of the modules allows for an optimized solution for each and every measurement and control point:

- Dynamic signal acquisition up to 100 kHz per channel
- inputs and outputs for all types of signals and sensors
- Galvanic isolation (up to 1200V) of inputs and outputs
- Multi-channel, High-density packaging
- Intelligent signal conditioning on every channel.

All modules connect to a Q.series test controller (Q.gate, Q.pac, or Q.station) for synchronization and buffering, and data exchange between the test controller and automation system is handled via Ethernet TCP/IP, EtherCAT, Profibus-DP, CANopen, or through additional industrial fieldbus standards.

#### Key Features:


- **4 high galvanic isolated input channels**  
differential voltage,  
isolation voltage 1200 VDC permanent
- **4 measuring ranges selectable each channel**  
 $\pm 40$  V;  $\pm 120$  V,  $\pm 400$  V,  $\pm 1200$  V
- **Fast high accuracy digitalization**  
24 bit ADC, 50 kHz sample rate per channel with 4 active channels,  
100 kHz sample rate per channel with 2 active channels
- **Signal conditioning**  
linearization, digital filter, average, scaling,  
min/max storage, RMS, arithmetic, alarm
- **RS485 fieldbus interface**  
up to 48 Mbps: LocalBus  
up to 115.2 kbps: Modbus-RTU, ASCII
- **Connectable to any Test Controller**  
e.g. Q.gate or Q.pac
- **Galvanic isolation**  
channel to channel to power supply and to interface  
isolation voltage 1200 VDC / 858 VACrms  
test voltage 5 kVrms over 1 minute
- **Electromagnetic Compatibility**  
according EN 61000-4 and EN 55011
- **Power supply 10...30 VDC**
- **DIN rail mounting (EN 50022)**

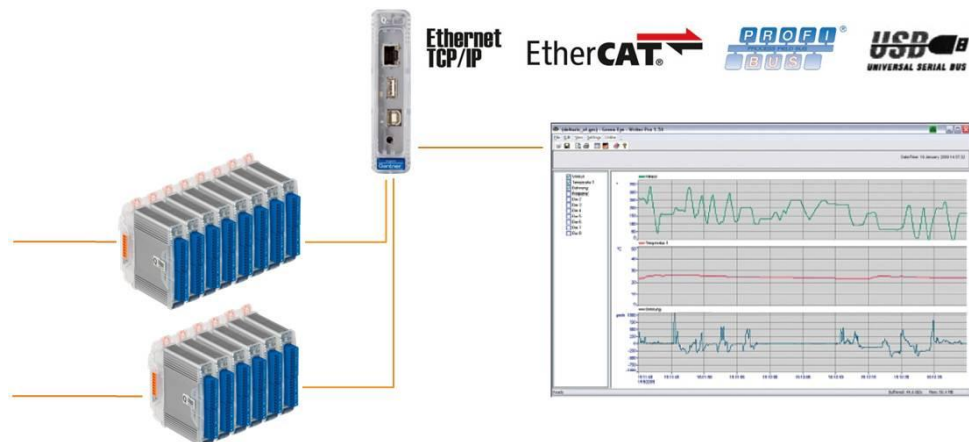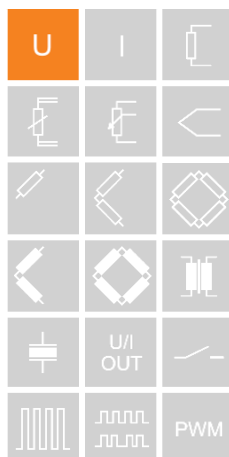

# Q.bloxx A128

High Isolation Module for Dynamic High Voltages

## Block Diagram

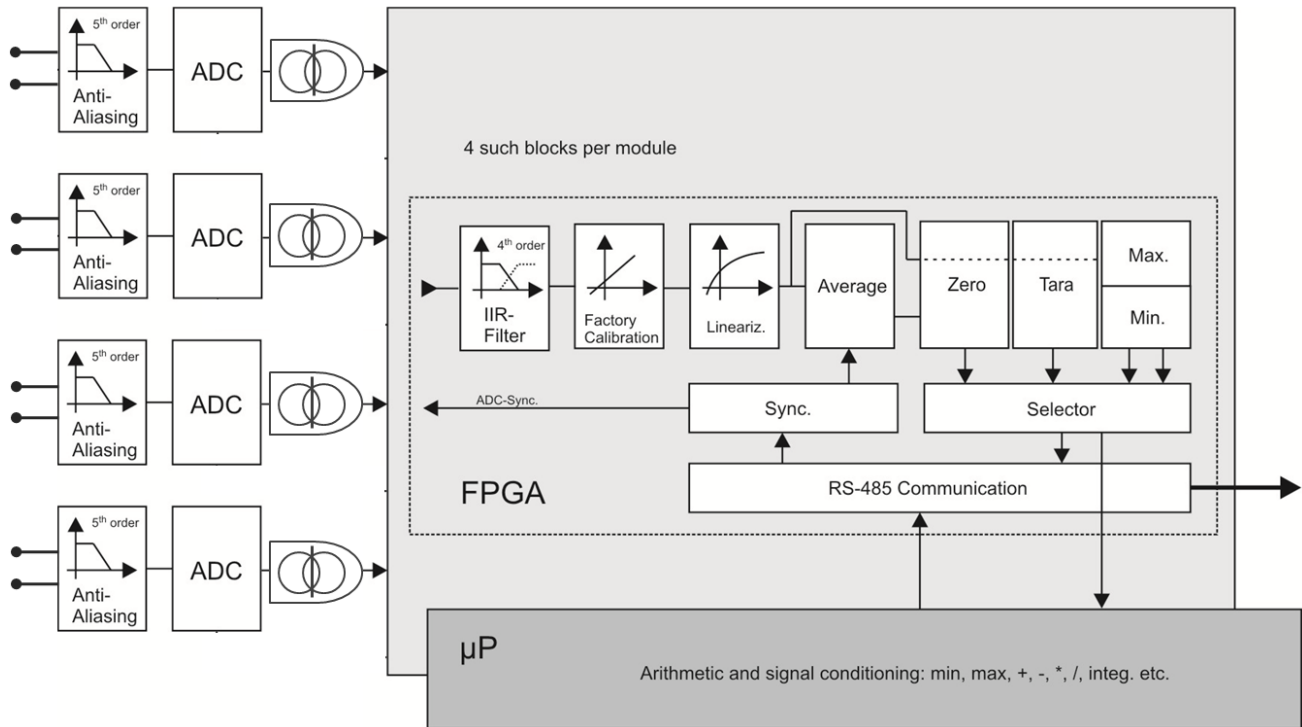

| Analog Inputs         |  |                |            |
|-----------------------|--|----------------|------------|
| Number                | 4  |                |            |
| Accuracy              | 0.01 % typical   |                |            |
|                       | 0.02 % in controlled environment <sup>1</sup>                                    |                |            |
|                       | 0.05 % in industrial area <sup>2</sup>   |                |            |
| Linearity error       | 0.01 % of the final value typical  |                |            |
| Repeatability         | 0.003 % typical (within 24 h)  |                |            |
| Isolation voltage     | 1200 VDC permanent, channel to channel to power supply to interface <sup>3</sup> |                |            |
| Measurement Voltage   | Range  | max. Deviation | Resolution |
|                       | ±1200 V  | ±300 mV        | 6 mV       |
|                       | ±400 V   | ±100 mV        | 2 mV       |
|                       | ±120 V   | ±30 mV         | 600 µV     |
|                       | ±40 V  | ±10 mV         | 200 µV     |
| Input resistance      | >10 MΩ   |                |            |
| Long term drift       | <1 mV / 24 h; <2.5 mV / 8000 h   |                |            |
| Temperature influence | on zero  | on sensitivity |            |
|                       | <5 mV / 10 K   | <0,05 % / 10 K |            |
| Signal-noise-ratio    | > 100 dB at 100 Hz   |                |            |

<sup>1</sup> according EN 61326: 1997, appendix B

<sup>2</sup> according EN 61326: 1997, appendix A

<sup>3</sup> High Voltage lifetime (TDD B E Model): Time to fail approx. 4 years at 1200 VDC and 60 °C permanent

# Q.bloxx A128

## High Isolation Module for Dynamic High Voltages

| Analog/Digital-Conversion |  |
|---------------------------|--|
| Resolution                | 24 bit   |
| Sample rate               | 50 kHz at 4 active channels, 100 kHz at 2 channels   |
| Conversion method         | Sigma-Delta (group delay time 380 $\mu$ s)   |
| Anti-aliasing filter      | 20 kHz, 5 <sup>th</sup> order per channel  |
| Digital filter            | IIR, low pass, high pass, band pass, 4 <sup>th</sup> order, 1 Hz up to 10 kHz in steps 1, 2, 5 |
| Averaging                 | configurable or automated according the selected data rate                                     |
| Power Supply              |  |
| Power supply              | 10 up to 30 VDC, overvoltage and overload protection   |
| Power consumption         | approx. 2 W  |
| Influence of the voltage  | <0.001 %/V   |
| Environmental             |  |
| Operating temperature     | -20°C up to +60°C  |
| Storage temperature       | -40°C up to +85°C  |
| Relative humidity         | 5 % up to 95 % at 50°C, non condensing   |
| Communication Interface   |  |
| Standard                  | RS-485, 2-wire   |
| Data format               | 8e1  |
| Protocols                 | Local-Bus: 115200 bps up to 48 Mbps<br>Modbus-RTU, ASCII: 19200 bps up to 115200 bps           |
| Connectable devices       | max. 32  |
| Mechanical                |  |
| Case                      | Aluminum and ABS   |
| Dimensions (W x H x D)    | (27 x 120 x 105) mm  |
| Weight                    | approx. 200 g  |
| Mounting                  | DIN EN-rail  |

### Warm Up Time

All declarations are valid after a warm up time of 45 minutes.

Specification subject to change without notice  
gantner-q.bloxx-a128.pdf (Version 0511)