

FUTEK MODEL TRS600

Drawing Number: FI1028-F





INCH [mm] R.O.= Rated Output

CONNECTOR CODE
(CABLE PACKAGE WIRING CODE)

Power	Ground	Signal	Return (Signal)
PIN 'F' (RED)	PIN 'E' (BLACK)	PIN 'C' (GREEN)	PIN 'D' (WHITE)
Shield	Shunt Cal	Shunt Cal (Gnd)	
PIN 'M' (Floating)	PIN 'K' (PURPLE)	PIN 'A' (YELLOW)	

NON CONTACT SHAFT TO SHAFT ROTARY TORQUE SENSOR

CE COMPLIANT

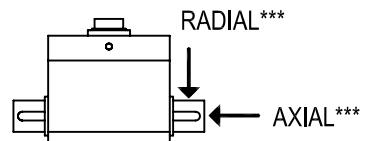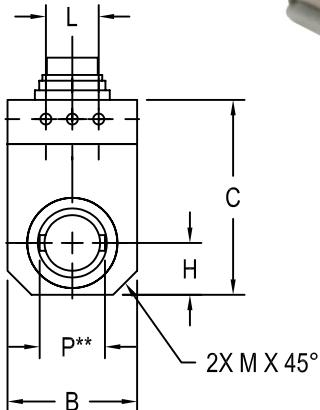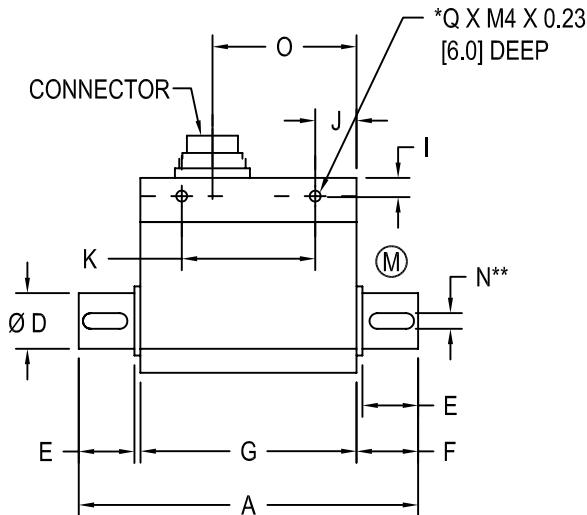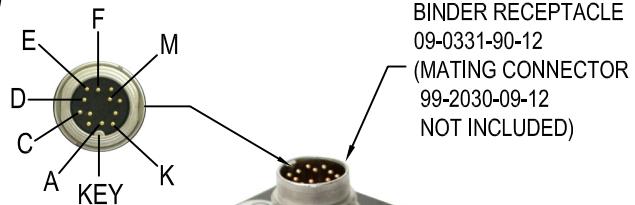

(M)=MEASURING SIDE

* ANTI-ROTATION HOLES, NOT TO BE USED TO SUPPORT LOAD.

** FEATHER KEYWAYS PER DIN 6885, KEYWAYS COME PRE-INSTALLED.

*** MAXIMUM LOAD ALLOWED, NOT FOR MEASUREMENT.

ITEM #	CAPACITY in-lb N m	A	B	C	Ø D	E	F	G	H	I	J	K	L	M	N**	O	P**	Q*	*** MAX. AXIAL FORCE lb[N]	*** MAX. RADIAL FORCE lb[N]	ROTATIONAL SPEED (MAX)	WEIGHT lb[kg]
FSH01994	9 1																	4.5 [20]	1 [5]			
FSH01995	18 2	3.62 [92]	1.10 [28]	2.04 [52]	0.394 [10]	0.63 g6	0.67 [16]	2.28 [58]	0.55 [14]	0.19 [5]	0.43 [11]	-	0.31 [8]	0.32 [8]	-	1.46 [37]	-	6	11 [50]	1 [5]	12000 RPM	0.6 [0.28]
FSH01996	44 5																	2 [10]				
FSH01997	89 10																	34 [150]	4.5 [20]			
FSH01998	177 20	4.25 [108]	1.49 [38]	2.28 [58]	0.748 [19]	1.18 g6	1.26 [30]	1.73 [44]	0.75 [19]	0.24 [6]	0.86 [22]	-	-	0.40 [10]	0.236 [6]	0.87 [22]	0.236 [24]	3	7 [30]			1.1 [0.50]
FSH01999	443 50																	45 [200]	11 [50]			9000 RPM
FSH02730	885 100	4.92 [125]	2.28 [58]	2.99 [76]	1.102 [28]	1.06 g6	1.20 [27]	2.52 [30.5]	1.14 [29]	0.19 [5]	0.55 [14]	1.97 [50]	1.18 [30]	-	0.315 [8] p9	1.57 [40]	1.34 [34]	8	90 [400]	56 [250]		2.3 [1.06]

SPECIFICATIONS:

RATED OUTPUT

±5VDC

SAFE OVERLOAD

150% of R.O.

ZERO BALANCE

±1% of R.O.

EXCITATION

11-26 VDC, 1 Watt

NONLINEARITY

±0.2% of R.O.

HYSTERESIS

±0.1% of R.O.

NONREPEATABILITY

±0.2% R.O.

TEMP. SHIFT ZERO

±0.01% of R.O. / °F [±0.02% of R.O. / °C]

TEMP. SHIFT SPAN

±0.01% of Load / °F [±0.02% of Load / °C]

OPERATING TEMP.

-13 to 176°F [-25 to +80°C]

COMPENSATED TEMP.

41 to 122°F [+5 to +50°C]

CONNECTOR:

12 pin Binder Series #581 (09-0331-90-12)

ACCESSORIES AND RELATED INSTRUMENTS AVAILABLE

CALIBRATION (STD)

Certificate of Conformance

CALIBRATION (AVAILABLE)

5pt CW and CCW

CALIBRATION TEST EXCITATION

12 VDC

SHUNT CALIBRATION

With sensor fully connected apply 11-26 VDC

to Pins A & K to generate 5VDC nom output.