

# HS-630 Compact and Portable Meter

Vibration and temperature outputs

## Key Features

- Velocity & bearing condition
- Used to monitor vibrations and temperature without installing equipment
- Rechargeable battery used with mains or in-car charger
- Sensor/cable fault indicator
- Display hold function
- Choice of metric or imperial measurement



## Product Description

The HS-630 portable Vibration and Temperature Meter Kit has been designed for use as both an entry level and also a comprehensive vibration/temperature monitoring instrument for maintenance engineers across all types of industry.

The kit consists of the compact vibration meter with a combined non-contact temperature measuring sensor aided by a locator beam, a hand held probe, a magnetic mount for more permanent installations, a protective carrying case, an instruction manual and battery chargers for both mains and in-car use.

The meter is microprocessor based and by selection of the controls can be easily set up to monitor acceleration (g) levels, velocity (mm/sec), displacement ( $\mu\text{m}$ ), bearing condition (BG or BV) and temperature ( $^{\circ}\text{C}$  or  $^{\circ}\text{F}$ ). A display hold function is also included.

The unit, which conforms to ISO 2954 and ISO 10816-3 also has an automatic alarm check for bearing condition.

Operating from an internal re-chargeable Lithium battery, the meter offers 48 hours continuous operation. From flat, the unit can be recharged in 3 hours using either the mains or in-car charger supplied with the kit.

Because of its compact size, ease of use and battery operation, the HS-630 allows engineers to monitor vibration and temperature levels on important machinery anywhere around the factory.

# HS-630 Compact and Portable Meter

## Vibration and temperature outputs

### Technical Performance

Input	100 mV/g constant current accelerometer
Accelerometer	Hand held, supplied with 0.8 M cable
Ranges	Acceleration ... 0-20 g Peak Velocity ... 0-200 mm/s RMS Displacement ... 0-2000 µm pk-pk Bearing Condition (BG) ... 0-20 g RMS Bearing Condition (BV) ... 0-200 mm/s RMS
Accuracy	± 5%
Frequency Range	Acceleration ... 5 Hz to 12 kHz Velocity ... 10 Hz to 1 kHz Displacement ... 5 Hz to 1 kHz Bearing Condition (BG & V) ... 1 kHz to 12 kHz Automatic Alarm Check for Bearing Condition
Temperature Range	-20°C to 120°C or -5°F to +250°F
Laser Guide	Red, <1 mW, IEC 60825-1 compliant
Distance Range	For temperature measurement 0 to 2 metres. Distance/Spot Dia. Ratio 8:1
Accuracy	±5%
Display	LCD
Hold Mode	Displays alarm status against ISO 2954 & ISO 10816-3

### Environmental

Temperature Range (meter)	Operating ... -10 to 50°C Storage ... -20 to 60°C
Temperature Range (accel)	-20 to 90°C
Sealing	IP54
EMC	EN61326-1:2013


### Electrical

Power	Lithium rechargeable battery 3.6 Volts, 1700 mA hours 48 hours continuous operation Auto switch-off after 3 minutes
Battery Charge	3 hrs from flat, supplied with meter, charger & car charger

### Mechanical

Case Material	Plastic
Dimensions	115 x 70 x 25 mm
Weight	Meter - 160 gms Accelerometer (incl cable) - 200 gms
Magnetic Base	12 kg pull strength
Spike	70 mm

### How To Order

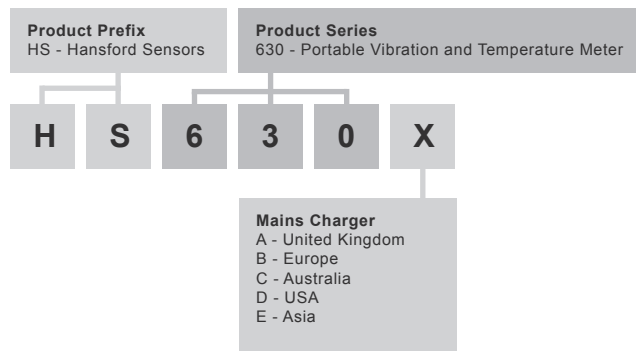

<b>Accessories</b>	
Hand-Held Probe	(HS-6201005501)
Magnetic Mount	(1/4-28" UNF Male)
Stainless Steel Vibration Spike 75mm	(HS-AS054-075)
80cm Cable with BNC & TNC Connectors	(AC-095)
In-Car Battery Charger	(HS-AA032)
Mains Battery Charger	(HS-AA033)
Carry Case	(HS-AA034)
Replacement Battery	(HS-AA035)



[www.hansfordsensors.com](http://www.hansfordsensors.com)  
[sales@hansfordsensors.com](mailto:sales@hansfordsensors.com)

We reserve the right to alter the specification of this product without prior notice  
TS093.7

