
PROPRIETARY AND CONFIDENTIAL ATION CONTAINED IN THIS DRAWING IS THE SC

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

CABLE LENGTH TOLERANCE		
≤1 FT	±0.5 IN	
>1 FT - 5 FT	±0.5 IN	
> 5 FT - 10 FT	+4 / -0 IN	
>10 FT - 25FT	+6 / -0 IN	
>25 FT	+5% / -0%	

		REVISIONS			
REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
В	8638	SEE ECN	EM 05/22/11	LN	DV,
С	9399	BNC STRAIN RELIEF MATERIAL IS: SANTOPRENE WAS: POLYPROPYLENE	JS 12/13/12	PA	2



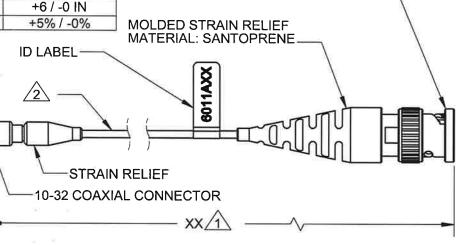

CONTRACT NO.

BNC CONNECTOR-

2 SEE CABLE SPECIFICATION TABLE

MODEL NUMBER 6011AXX, XX DENOTES LENGTH IN FEET

NOTES: UNLESS OTHERWISE SPECIFIED

USED ON	NEXT ASSY			
APPLICATION				
THIRD ANGLE PROJECTION				
	SA F			

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994,
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
THDS PER MIL.S-7742.
DIMENSIONS APPLY AFTER FINISHING.

63/
ALL MACHINED SURFACES.

TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE:

2 SINGLE CONDUCTOR SHIELDED LOW NOISE CABLE			
AWG	30-7/38 SILVER PLATED COPPER		
TEMP	200 DEG C WIRE RATED		
WITHSTANDING VOLTAGE	2000 VAC		
CONDUCTOR INSULATION	EXTRUDED PTFE, NATURAL, Ø.033 ±.002		
CAPACITANCE (SHIELD TO CONDUCTOR)	32 pF/FT		
LOW NOISE WRAP #1 & #2	CARBON TAPE		
IMPEDANCE	50 OHMS		
INDUCTANCE	.80 microH/FT		
SHIELD	38 AWG SILVER PLATED COPPER BRAID, 95% MIN COVERAGE, Ø.054 NOM		
RESISTANCE	.20 OHM		
JACKET	WHT PTFE WRAP .005010 WALL		
DIAMETER	Ø.074±.006		



MINIUM BEND RADIUS

OUTLINE/INSTALLATION
DRAWING, CABLE, 10-32 TO BNC
PLUG, MODEL 6011A

SIZE CAGE CODE DWG. NO. 127-6011A

SCALE: NONE SOLIDWORKS

SHEET 1 OF 1

REV

1 IN