SST20 Inclinometer



Vigor Technology

SST20 Inclinometer

Features

- Low cost, high performance, suitable for batch application
- 50Hz refresh rate, 10Hz response frequency
- $\pm 0.07^{\circ}$ accuracy@-15~50°C
- ±0.2% cross-axis error
- Available to horizontal, vertical, headstand, etc installation methods
- IP67protection
- 9~36VDC power supply
- Sensing elements survive to 1500g shock while operating



Vessel, Engineering machinery, Solar/wind energy, automobile/truck/vehicle, Communication/electric Tower monitoring, High-voltage pylon monitoring, Antenna, construction engineering, Landslide, etc

Descriptions

SST20 inclinometer based on Vigor's advanced tilt measurement technology, to meet with low cost, high reliability and volume application, performs high performance-cost ratio.

SST20 employed most universal & mass-produced components, casting aluminum alloy house, universal high reliability M12-5pin industrial connector; IP67 protection, auto-test/calibration equipment which not only ensure delivery speed, also keep the consistency of goods

Thanks for Vigor engineers, they adopt advanced technologies as:

- CAE/EDA simulation;
- Modal test for both housing and PCB to eliminate resonance due to vibration;
- Comprehensive performance & function test for component & firmware;
- Calibration technology based on SST300 high accuracy inclinometer;
- Refer MIL/EN/ISO/IEC standards to enhance SST20 durability & reliability.

MTBF more than 10 years per time and has better EMC ability.

SST20 output RS232/RS485/CAN/CANOpen/Switch and Voltage/Current signals. Better power management to meet with automotive /truck/vehicle application without regulated power.


OEM service is available with calibrated PCBA or MIL qualified.




Performances (@25°C test conditions, except other notifications)

	nances (@25 C test conditions, except other notifications)							
Output Interface	RS232/RS485/CAN/CANOpen/Switch	0.5~4.5VDC/4~20mA						
Measurement range	±5°, ±10°, ±15°, ±30°, ±45°, ±60°, ±90°, ±180°, 0~360°							
Accuracy	±0.07°@-15~50°C	±0.15°@-15~50°C						
Non-linearity	±0.03°	±0.05°						
Resolution	0.002°	0.005°						
Repeatability	±0.02°	±0.05°						
Offset	±0.02°	±0.05°						
Cross-axis sensitivity	±0.2%FS	±0.2%FS						
Measuring axis	1 or 2 axis (±180° and 0~360° measurement range single axis only)							
Bandwidth	Default 3Hz, 5Hz, 10Hz available							
Response time	5ms (no filtering)	10ms (no filtering)						
Refresh rate	Default 5Hz, max. 50Hz	50Hz						
Cold start warming time	Less than 60s							
	RS232: 9600bps (adjustable), 8 data bits, 1 start bit, 1 stop bit							
	RS485: 9600bps (adjustable), 8 data bits, 1 start bit, 1 stop bit No matched resistance Voltage output: 0.5~4.5 Internal resistan							
Interface	CAN2.0: according to ISO11898-2 standard, 40k~1MBit/s baud rate,	Drive current (max.) 15mA						
features	adaptive standard frame and extended frame format No matched resistance							
	CANOpen: according to DS301 standard, 40k~1MBit/s baud rate No matched resistance	Current output: 4~20mA;						
	Switch output: Darlington OC output, load with 1A @9~36VDC, alarm point can be pre-set in factory	Internal resistance $50M\Omega$; load impedance $150\sim650\Omega$						
	RS232/RS485 Output: 9~36VDC, current ≤50mA@24VDC	16~36VDC current≤30mA (no-load) @24VD0						
Power consumption	CAN/CANOpen Output: 9~36VDC, current≤80mA@24VDC							
	Switch output: 9~36VDC, current≤50mA (no-load) @24VDC	(10 1044) @214 D						
Operation temperature range	-40∼85°C							
Storage temperature range	-40∼85°C							
EMC	According to EN 61000/GBT17626							
Insolation	≥100MΩ							
MTBF	10 years							
Shock	100g@11ms, three-axis, half- sine							
 	8grms, 20~2000Hz							
Vibration	IP67							
Vibration Protection	IP67							
H	IP67 M12 5-Pin socket							

Demisions (mm)

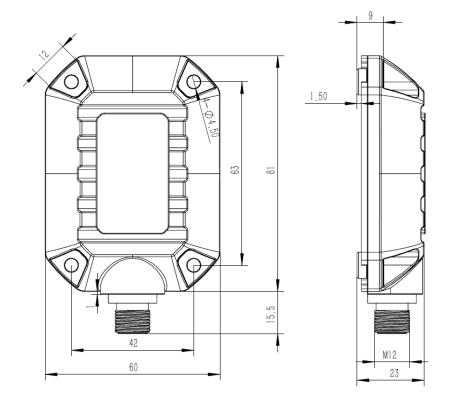


Wiring

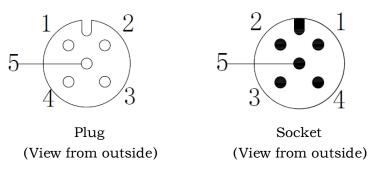

Pin	Wire color	Output interface						
		RS232	RS485	CAN	CANOpen	voltage	Current	Switch alarm
1	Red	Power+	Power+	Power+	Power+	Power+	Power+	Power+
2	Black	Power GND	Power GND	Power GND	Power GND	Power GND	Power GND	Power/Signal GND
3	Blue	TXD	RS485-A	CAN_H	CAN_H	Vx	Ix	Control power +
4	Brown	RXD	RS485-B	CAN_L	CAN_L	Vy	Iy	X axis Alarm
5	Green	Signal GND	Signal GND	Signal GND	Signal GND	Signal GND	Signal GND	Y axis Alarm

Remarks: if order switch alarm output inclinometer, only provide factory settings for alarm point. If you need set alarm point with special request, should specify all requirments when ordering. Single axis inclinometer only has X axis.

Ordering

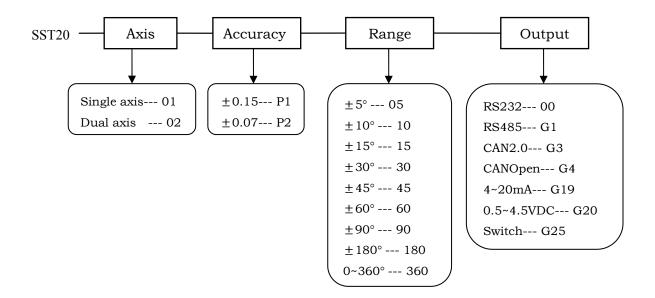

Remarks: 4~20mA and 0.5~4.5VDC output inclinometer only provide 0.15°accuracy class; RS232/485, CAN2.0, CANOpen and switch output inclinometer only provide 0.07 accuracy class.

For example: if order a dual-axis SST20 inclinometer, range $\pm 30^{\circ}$, $\pm 0.07^{\circ}$ accuracy, output CAN2.0, the model should be chosen as :SST20-02-P2-30-G3