


# 80512 Heavy Duty Magnet Thermocouple

## Construction

Design Heavy duty for industrial applications  
 Dimensions Diameter 80mm, 15mm thick  
 Magnetic strength Extremely powerful magnet 150 Newton



## Thermocouple

Calibration Type K thermocouple  
 Accuracy According IEC 584-1

## Temperature range

Minimum temperature -20 °C  
 Maximum temperature +150 °C  
 Sensor contact Spring loaded thermocouple to surface contact

## Cable

Standard PVC cable, length 1000mm  
 Connector Miniature thermocouple plug  
 Ingress protection IP54

## Options

Cable Other cable length  
 Connector Without or other connector  
 Thermocouple type Type J or Type N  
 Cable insulation PTFE or Silicon cable


## Thermokoppel kleurcodes

Thermocouple Extension Type	ANSI	IEC
JX + Iron - Constantan ®		
KX + Chromel ® - Alumel ®		
TX + Copper - Constantan ®		
EX + Chromel ® - Constantan ®		
NX + Nicrosil ® - Nisil ®		
SX + Copper RX - Alloy 11		
BX + Copper-S - Copper-E		

## Toleranties volgens IEC 584-2

Type	Class	Temperature range	Fixed value °C	Tolerance to temp. t (°C)
T	1	- 40°C to + 350°C	± 0,5	± 0,004 · t
	2	- 40°C to + 350°C	± 1	± 0,0075 · t
	3	- 200°C to + 40°C	± 1	± 0,015 · t
E	1	- 40°C to + 800°C	± 1,5	± 0,004 · t
	2	- 40°C to + 900°C	± 2,5	± 0,0075 · t
	3	- 200°C to + 40°C	± 2,5	± 0,015 · t
J	1	- 40°C to + 750°C	± 1,5	± 0,004 · t
	2	- 40°C to + 750°C	± 2,5	± 0,0075 · t
	3	-	-	-
K and N	1	- 40°C to + 1000°C	± 1,5	± 0,004 · t
	2	- 40°C to + 1200°C	± 2,5	± 0,0075 · t
	3	- 200°C to + 40°C	± 2,5	± 0,015 · t
R and S	1	0°C to + 1600°C	± 1,0	± [1+0,003 ·(t-1100)]°C
	2	0°C to + 1600°C	± 1,5	± 0,0025 ·t
	3	-	-	-
B	1	-	-	-
	2	+ 600°C to + 1700°C	± 1,5	± 0,0025 ·t
	3	+ 600°C to + 1700°C	± 4	± 0,005 ·t

## Ordering code

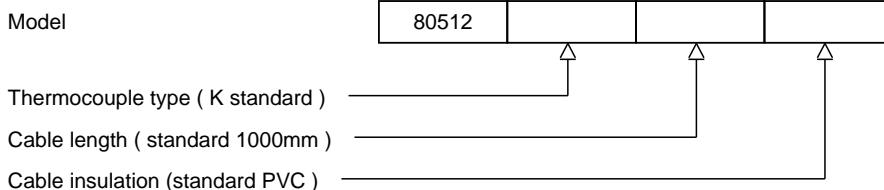

H1-1 Rev.0 7/07



**thermo-electra**  
 temperature sensor solutions

Thermo Electra B.V.  
 Weteringweg 10  
 2641KM Pijnacker  
 The Netherlands

Phone +31 (0)15 - 3621200  
 Fax +31 (0)15 - 3694082  
 Email sales@thermo-electra.com  
 http://www.thermo-electra.com

