


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE	Lei/2011/05/09	Michael/2011/05/09	Johnson/2011/05/09

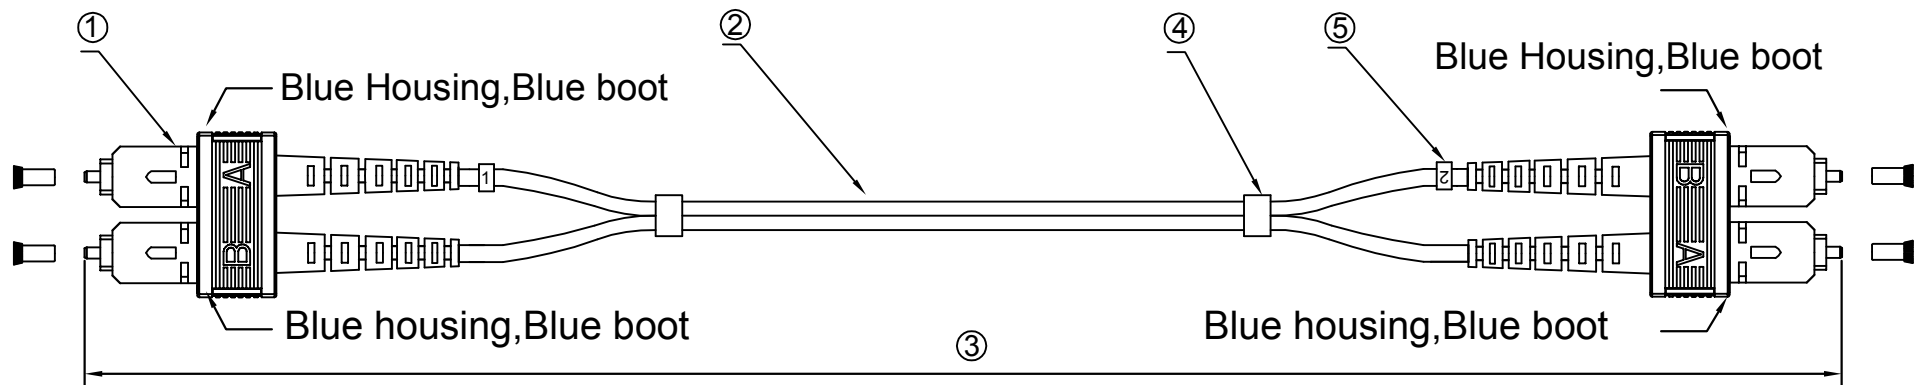

Specification:

- 1.Connector Type: SC/PC singlemode
- 2.Cable Type:
Zipcord cable,! 2.8mm. 9/125um , singlemode,
Cable Jacket : Yellow color, LSZH material
- 3.Length : xM
- 4.Shrink Tube
- 5.Cable Marker

Part Number	Length
FB-50S	0.5M
FB-51S	1M
FB-51S-5	1.5M
FB-52S	2M
FB-53S	3M
FB-54S	4M
FB-55S	5M
FB-57S	7M
FB-510S	10M
FB-515S	15M
FB-5xxS	xxM

Performance:

- a. Insertion Loss :<0.3 dB
- b. Return loss > 50 dB
- c. Ferrule End-face Radius : 10 < R < 30mm
- d. Apex Offset: < 50um
- e. Increase in insertion loss after 500 mating:0.2 dB Max.
- f. Operation Temperature :-20" to +70"
- g. Storage Temperature :-40" to +80"

		TITLE		DELTAO fiberkablage SC - SC, duplex, singlemode ,XXmeters		VERSION	1.0
UNIT	mm	P/N.		DRAWN BY			
unless otherwise stated Tolerances mm XXX.XX ±0.3 XX.XX ±0.2 X.XX ±0.1 angular 2°		MATERIAL		CHECK BY			
SCALE		PAGE		1/1	APPROVAL BY		