



MCF-LW12MET

LoRaWAN® Mono-Phase Energy Metering with I/O

This compact metering can be used for monitoring and checking the power of electronic devices, and can remotely switch devices on/off and read the state of a digital input.

Characteristics:

- CPU Cortex M0+
- RTC
- EEProm 32KB
- Flash 64KB
- Encryption AES 128 bit
- Class C LoRaWAN® stack EU868, AS923
- Metering of a 230Vac 16Amp Load (active, reactive and apparent energy, Class 0.2).
- Data are sent through LoRaWAN® protocol for remote managing.
- Instantaneous reading of active, reactive and apparent power, voltage and current
- 1 opto-isolated input, capability 230Vac
- 1 relay output with COM, NO, NC contacts carrying 8Amp@230Vac
- NFC for IoT node setup, FW upgrade and data reading
- Power supply from line
- Storage temperature range -20 + 80C°
- Working temperature range -10 + 70C°
- Dimension: 53,4x87,2x25mm


Applications:

- Energy metering
- Powerline quality measure
- Monitoring of a remote input
- Managing of a remote actuator



MCF-LW12MET

LoRaWAN® Mono-Phase Energy Metering with I/O

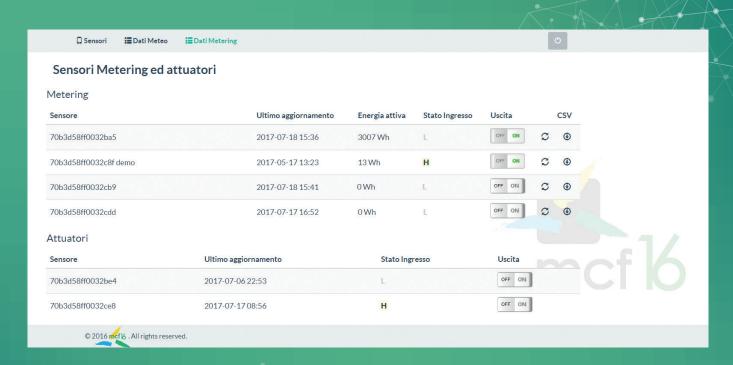

Collected data are avaible for download in CSV format

4	А	В	С	D	E	F
1	70b3d58ff0032ba5					
2	Data	Energia Attiva	Potenza Media	Energia Reattiva	Energia Apparente	Tempo Esercizio
3		Wh	W	VARh	VAh	minuti
4	15/07/2017 00:06	774	24	0	774	1806
5	15/07/2017 00:16	779	24	0	779	1816
6	15/07/2017 00:26	783	24	0	783	1826
7	15/07/2017 00:36	787	24	0	787	1836
8	15/07/2017 00:46	792	24	0	792	1846
9	15/07/2017 00:56	796	24	0	796	1856
10	15/07/2017 01:06	800	24	0	800	1866
11	15/07/2017 01:16	805	24	0	805	1876
12	15/07/2017 01:26	809	24	0	809	1886
13	15/07/2017 01:36	813	24	0	813	1896
14	15/07/2017 01:46	818	24	0	818	1906
15	15/07/2017 01:56	822	24	0	822	1916
16	15/07/2017 02:06	826	24	0	826	1926