



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓


REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED TO PRODUCTION	8/27/01	R. CARRICK
B	ECN# 1628: ADDED COMPONENT SPECIFICATION TABLE	12/31/03	T. CLARK
C	ECN# 2731 - ADDED ROHS STAMP	10/23/07	D. GRIFFIN
.	.	.	.

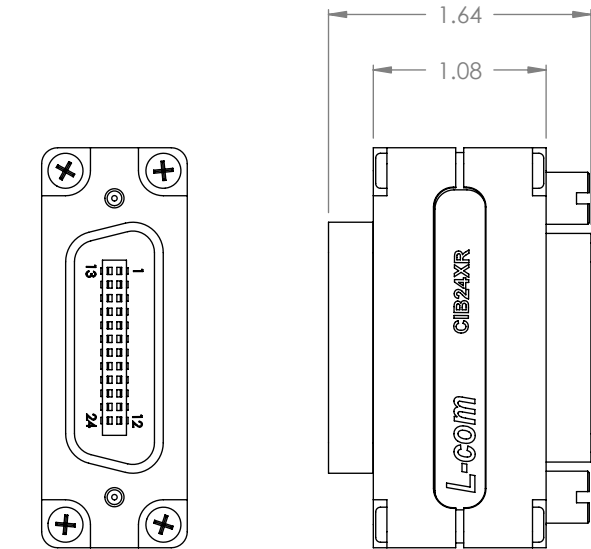

MALE 24-CONTACT
GPIB CONNECTOR

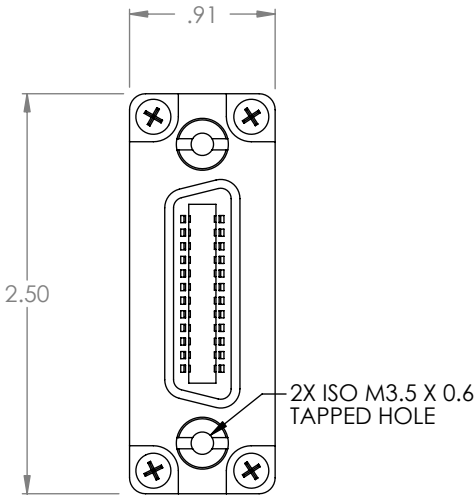

FEMALE 24-CONTACT
GPIB CONNECTOR

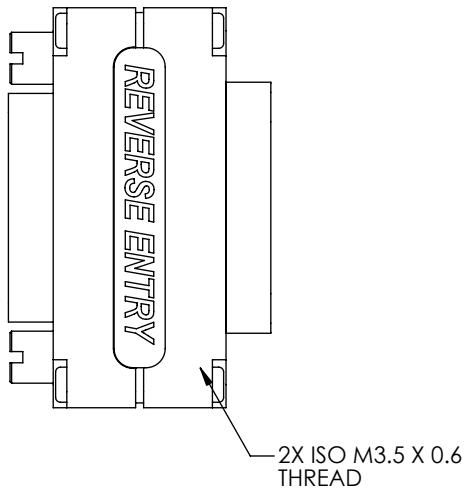

NOTES:

- NOTES:
1. WIRED STRAIGHT THROUGH PER ANSI/IEEE STD 488.1-1987.
2. TWO DUST CAPS PROVIDED WITH ADAPTOR.

MATERIAL:

HOUSING: DIE-CAST ALUMINUM ALLOY
CONNECTOR INSULATORS: GLASS-FILLED PBT, BLUE, UL94-V0 RATED
CONNECTOR CONTACTS: 24, COPPER ALLOY, RIBBON, .085" PITCH
SCREWLOCKS: STEEL

FINISH:

HOUSING: NICKEL PLATED
CONNECTOR CONTACTS: 30μ INCHES GOLD PLATED OVER NICKEL
SCREWLOCKS: BLACK OXIDE

ELECTRICAL:

VOLTAGE RATING: 200 VOLTS
CURRENT RATING: 1A PER CONTACT AT 25°C
INSULATION RESISTANCE: 1 GΩ

ENVIRONMENTAL:

OPERATIONAL TEMPERATURE
RANGE: -40°C TO +85°C

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] TOLERANCES TO BE: .X ±.1 [2.5] ANGLES ±2° .XX ±.01 [.25] .XXX ±.005 [.13] OVERALL CABLE LENGTH TOL: ≤ 60 [1524] +3 [76.2] / -0 > 60 [1524] +5% / -0%	APPROVALS	DATE	L-com CONNECTIVITY PRODUCTS				45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845							
	DRAWN BY RON CARRICK	8/27/2001	CATEGORY IEEE-488 GPIB											
	CHECKED BY DOUG PARHAM	8/27/2001	PRODUCT DESCRIPTION IEEE-488 REVERSING EXTENDER, M/F											
	APPROVED BY C. MCCORMICK	8/27/2001	SIZE A						FSCM NO. 43321		DWG. NO. CIB24XR		REV. C	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SCALE: NONE		CAD FILE: CIB24XR.SLDDRW				SHEET 1 OF 1					
PROJ 