

Q.brixx XL A109

Analog Output Module with Digital I/Os



Q.brixx XL is a new addition to the Q.series product family - the ideal DAQ solution for on-the-go applications requiring higher performance in potentially harsh environments. Q.brixx XL DAQ systems consist of up to 16 measurement modules and an integrated, high-performance controller for communication, control, and data logging purposes, all within a robust aluminum housing capable of withstanding severe shock and vibration without sacrificing performance.

- High density and flexibility with 16 modules in one system in any constellation
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Connectable to Controller Q.station
- Power supply 10 ... 30 VDC



Key Features

- 4 Analog output channels
voltage (± 10 VDC) or current (0 - 20 mA), configurable per channel
- DAC-resolution 16 bit
100 kHz each channel
- Outputs freely scalable
- 4 digital inputs and outputs
configurable as 2 counter, 2 frequency, or 2 PWM inputs, 4 frequency out, 4 PWM output or 4 state out
- Frequency measurement
Frequency measurement up to 1 MHz, direction detection
- Counter
Forward-backward counter, quadrature counter with reference position recognition (reset/enable), up to 1 MHz
- PWM input
Measurement of duty cycle and frequency
- 3-Way galvanic isolation
500 VDC channel to channel, channel to power supply, and bank

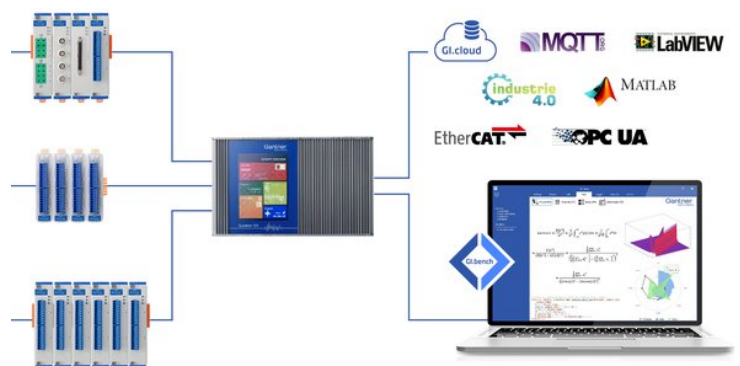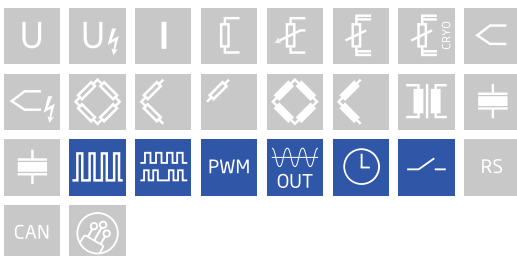

Technical Data

Analog Output

Channels	4
Accuracy	0.02 % typical
Output type	voltage or current, configurable per channel
Isolation voltage	500 VDC channel to channel to power supply channel to bus ¹

¹ noise pulses up to 1000 VDC, continuous up to 250 VDC

Output Mode Voltage

Output voltage	±10 VDC	
Allowable load resistance	> 2 kΩ	
Long term drift	< 1 mV / 24 hrs	< 2.5 mV / 8000 hrs
Temperature influence	< 2 mV / 10 K Offset drift	< 0.05 % / 10 K Gain drift
Noise voltage	< 10 mV at 1000 Hz	< 2 mV at 10 Hz

Current Output

Output current	0 - 20 mA	
Load burden	< 400 Ω	
burden influence	< 0.1 μA / Ω	
Long term stability	< 2 μA / 24 hrs	< 5 μA / 8000 hrs
Temperature drift	< 4 μA / 10 K Offset drift	< 0.05 % / 10 K Gain drift
Noise current	< 20 μA at 1000 Hz	< 4 μA at 10 Hz

Digital Input

Channels	4
Logic levels	TTL or 24 VDC according to IEC 61131-2, Type 1
TTL logic voltage	< 0.8 VDC (Low) > 3 VDC (High)
24 VDC logic voltage	-3 to 5 VDC (Low) 11 to 30 VDC (High)
Input type	PNP (current sinking)
Input voltage	30 VDC max.
Input current	2 mA max.
Isolation voltage	500 VDC, group to group, group to power supply, channel to bus ¹

¹ noise pulses up to 1000 VDC, continuous up to 250 VDC

Digital Input Modes

Status	
Response time	10 μ s
Frequency measurement	
Method	Chronos method (optimized by a combination of time measurement and pulse counting), detection of rotational direction (0 deg. / 90 deg.)
Frequency range	0.1 Hz to 1 MHz
Time base	0.001 s to 1 s
Internal reference frequency	48 MHz
Accuracy	0.01% at timebase > 1ms
Resolution	21 ns
Pulse counting	
Accuracy	0.01% at timebase > 1ms
Resolution	21 ns
Counter frequency	1 MHz
Mode(s) of operation	<ul style="list-style-type: none"> - Forward and reverse counting (additional input for direction of counting) - Quadrature counter (additional input for detection of rotational direction) - Quadrature counter with zero reference and reset/enable (two additional inputs)
Pulse-width measurement	
Input frequency	0.1 Hz to 1 MHz
Accuracy	0.01% at timebase > 1ms
Resolution	21 ns

Digital Output

Channels	4
Contact	open drain p-channel MOSFET
Output voltage	12 to 30 VDC (external supply required)
Load capacity	30 VDC / 500 mA (ohmic load)
Isolation voltage	500 VDC, group to group, group to power supply, channel to bus ¹

¹ noise pulses up to 1000 VDC, continuous up to 250 VDC

Digital Output Modes

Status			
Response time	10 μ s (>0.5 A)	100 μ s (>0.1 A)	1000 μ s (<0.1 A)
Frequency output			
Frequency range	0.1 Hz to 1 kHz / 10 kHz (depending on load capacity)		
Accuracy	0.1 %		
Resolution	1 μ s		
PWM output			
Frequency range	0.1 Hz to 1 kHz / 10 kHz (depending on load capacity)		
Accuracy	0.1 %		
Resolution	1 μ s		

Q.brixx XL A109

Analog Output Module with Digital I/Os

Digital to Analog Conversion

Resolution	16-bit
Update rate	100 kHz per channel
Settling time	3 μ s

Communication Interface Localbus

Protocols	proprietary Localbus (115200 bps to 48 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	2 W (approx.)
Input voltage influence	<0.001 % / V

Environmental Specifications

Electromagnetic compatibility	according to IEC 61000-4 and EN 55011
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 145 x 135mm
Weight	approx. 500 g

Ordering Information

Article number	523523
----------------	--------

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com