

NT24k[®]-14FX6-POE Industrial PoE+ Switch


N-Tron[®] Networking Series



▶▶▶ Industrial Managed Gigabit PoE+ Ethernet Switch

Red Lion's N-Tron[®] series NT24k[®]-14FX6-POE compact managed Gigabit Ethernet switch provides a robust solution for transmitting power and data to equipment in harsh environments and features eight 10/100/1000Base-T(X) ports with PoE+ and six 100Base-FX fiber ports with SC or ST connectors.

The NT24k-14FX6-POE managed switch features 14 ports (eight Gigabit IEEE 802.3af/at Power over Ethernet Plus (PoE+) ports and six 100Base-FX fiber ports) and is housed in a compact, hardened metal DIN-rail enclosure with redundant 22-49 VDC power inputs. Designed to handle the most demanding environments, the NT24k-14FX6-POE provides up to 30 Watts of power per port, high shock and vibration ratings and a wide -40° to 80°C operating temperature range.

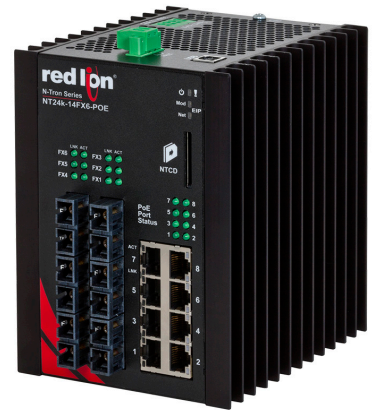

APPLICATIONS

- > Alternative Energy
- > Manufacturing
- > Oil & Gas
- > Transportation
- > Water/Wastewater

PRODUCT HIGHLIGHTS

- > IEEE 802.3af/at PoE+ Output
- > Smart Plug-and-Play Operation
- > 22 to 49 VDC Redundant Power Inputs
- > -40° to 80°C Wide Operating Temperature
- > Robust Remote Monitoring
- > N-Ring[™] & N-Link Network Ring Technology

IEEE 1588v2 PTP OPTIONS

- Boundary Clock
- Transparent Clock

IEEE 1588v2 applications include

- Coordinated motion control
- Time-stamped data logging
- Time-stamped fault detection

PTP Models & Upgrade Kit Available

FEATURES & BENEFITS

- > 14 Copper and Fiber Ports
 - Eight 10/100/1000Base-T(X) copper ports, supporting PoE+ on each port
 - Six 100Base-FX ports with SC/ST connectors
- > Redundant 22 to 49 VDC Power Inputs
 - Boosts power to meet PoE+ output requirements
- > IEEE 802.3af/at PoE Output
 - Supports PoE+ output on all copper ports simultaneously
- > Extended Environmental Specifications
 - -40° to 80°C operating temperature range
 - > 2M hours MTBF
 - UL/cUL: Class I, Div. 2 Groups A, B, C and D
- > Plug-and-Play Operation:
 - IGMP auto-configuration
 - MDIX auto-sensing cable
 - Simple network ring configuration
 - Backup and restore via recovery card or XML
- > Fully Managed Features Include:
 - SSH/SSL/HTTPS
 - SNMP v1, v2, v3
 - Web browser management
 - Detailed ring map and fault location charting
 - RSTP - 802.1d, 802.1w, 802.1D
 - Trunking and port mirroring
 - 802.1Q tag VLAN and port VLAN
 - IEEE 802.1x with RADIUS remote server authentication
 - DHCP Server, Option 82 relay, Option 61, IP fallback
 - Port Security – MAC address based
 - 802.1p QoS, port QoS and DSCP
 - Event Log/Syslog
 - SNTP (Simple Network Time Protocol)
 - IEEE 1588v2 (PTP) models available
 - Multi-Member N-Ring[™] technology with ~30ms healing
 - N-Link redundant ring technology
 - N-View[™] monitoring technology
 - EtherNet/IP[™] CIP[™] messaging
 - 802.1AB-2005 LLDP (Link Layer Discovery Protocol)

industrial
networking



EtherNet/IP[™]

▶▶▶ NT24k-14FX6-POE Specifications

SWITCH PROPERTIES

Operation: Managed
Number of MAC Addresses: 16,000
IEEE Compliant: 802.3, 802.3u, 802.3ab, 802.3x, 802.3af/at,
802.1d/D/w, 802.1p, 802.1Q, 802.1x
IEEE 1588v2 Software-Based Option
Latency (Typical): 1.6 μ s
Switching Method: Store-and-Forward
Supports 30 Watts per Port (25.5 Watts at the PD)
LED Status Indicators
Configurable Alarm Contact
Onboard Temperature Sensor
Supports Full/Half Duplex Operation
Maximum Throughput: Up to 17.2 Gb/s
MDIX Auto Sensing Cable
Auto Sensing Speed and Flow Control
Communications: Full Wire Speed
MTBF: >2 million hours
Jumbo Frame Support

POWER INPUT

Input Voltage: 22-49 VDC
Steady Input Current: 11.24 A @ 24 VDC
Inrush: 60.8 A / .2 ms @ 24 VDC
BTU/HR: 122

POWER OVER ETHERNET

PoE Standard: IEEE 802.3af/at Gigabit PSE
PoE Output Power: 57 VDC / 30 Watts Output (25.5 W at PD)
Power Pin Assignment: Pins 1/2 (-), Pins 3/6 (+)
PSE Type: Type 2

CONNECTORS

10/100/1000BaseT: Eight (8) RJ-45 ports
ESD and surge protection diodes on all copper ports
100BaseFX: Six (6) ST or SC duplex fiber ports
Configuration Port: One (1) USB Type B

NETWORK MEDIA

10BaseT: \geq Cat3 cable
100BaseTX: \geq Cat5 cable
1000BaseT: \geq Cat5e cable
100BaseFX Multimode: 50-62.5/125 μ m
100BaseFX Singlemode: 7-10/125 μ m

RECOMMENDED WIRING CLEARANCE

Front: 4" (10.16 cm)
Top: 4" (10.16 cm)

ENVIRONMENTAL

Operating Temperature: -40°C to 80°C
Storage Temperature: -40°C to 85°C
Operating Humidity: 10% to 95% (non condensing)
Operating Altitude: 0 to 10,000 ft.
Shock: 200 g @ 10 ms (bulkhead mounted)
Vibration: 50 g @ 5-200 Hz, Triaxial (bulkhead mounted)

CERTIFICATION & COMPLIANCE

Product Safety:
ANSI/ISA 12.12.01-2013 Class I and II, Div. 2 and Class III, Div. 1 and 2, Groups A, B, C and D Hazardous Locations
UL508 Industrial Control Equipment
CAN/CSA-C22.2 No. 213-M1987 Class I Div. 2 Hazardous Locations
CAN/CSA-C22.2 No. 14-M1987 Industrial Control Equipment
Emissions:
FCC Title 47, Part 15, Radio Frequency Devices, Subpart B ANSI C63.4-2009; Industry Canada ICES-003, EN 55011; EN 61000-6-4, EN 61000-3-2, EN61000-3-3, EN 55032
Immunity:
EN 55024, EN 61000-6-2; IEC 61000-4-2 (ESD); IEC 61000-4-3 (RFAM); IEC 61000-4-4 (EFT); IEC 61000-4-5 (SURGE); IEC 61000-4-6 (RFCM); IEC 61000-4-8 (PFMF); IEC 61000-4-11 (VDI)
Rail:
EN 50155, EN 50121 and EN 61373
Designed to Comply with:
IEEE 1613 (Electric Utility Substations), NEMA TS1/TS2 (Traffic Control)
Other:
ABS Type Approval for Shipboard Applications; EMC Directive 2014/30/EU; LV Directive 2014/35/EU GOST-R, RoHS Compliant

MECHANICAL

Case Dimensions:
Height: 5.88" (14.92 cm)
Width: 4.28" (10.87 cm)
Depth: 5.54" (14.07 cm)
Weight: 3.35 lbs (1.52 kg)
Mount: DIN Rail 35 mm

WARRANTY

3 Years on Design and Manufacturing Defects

▶▶▶ NT24k-14FX6-POE Specifications

FIBER TRANSCEIVER CHARACTERISTICS

| Fiber Mode | MM | SM | SM | SM |
|--------------------|---------|---------|---------|---------|
| Fiber Length* | 2 km | 15 km | 40 km | 80 km |
| TX Power Min | -19 dBm | -15 dBm | -5 dBm | -5 dBm |
| RX Sensitivity Max | -31 dBm | -31 dBm | -34 dBm | -34 dBm |
| Wavelength | 1310 nm | 1310 nm | 1310 nm | 1550 nm |


* Fiber Length distances represent typical performance.
Link budgets should be evaluated based on specific application conditions.

ORDERING GUIDE

| PART NUMBER | DESCRIPTION |
|---------------------------|--|
| NT24K-14FX6-XX-POE | 14-Port Gigabit Managed POE+ Industrial Ethernet Switch (8 10/100/1000BaseT, 6 100BaseFX, multimode 2km ports) |
| NT24K-14FX6-XX-POE-PT | 14-Port Gigabit Managed POE+ Industrial Ethernet Switch (8 10/100/1000BaseT, 6 100BaseFX, multimode 2km ports) PTP Enabled |
| NT24K-14FXE6-XX-YY-POE | 14-Port Gigabit Managed POE+ Industrial Ethernet Switch (8 10/100/1000BaseT, 6 100BaseFX, singlemode ports) |
| NT24K-14FXE6-XX-YY-POE-PT | 14-Port Gigabit Managed POE+ Industrial Ethernet Switch (8 10/100/1000BaseT, 6 100BaseFX, singlemode ports) PTP Enabled |
| NTCD-CFG | NT24k Configuration Recovery Device |
| NTPS-24-20 | DIN-Rail Power Supply, 20 Amp @ 24VDC |
| NTPS-48-10 | DIN-Rail Power Supply, 10 Amp @ 48VDC |
| NT24K-NM-PMK | NT24k Non-Modular Panel Mount Kit |
| NT24K-KIT-PTP | NT24k Upgrade License to Enable IEEE 1588/PTP on Non-PT NT24k Switches |

Where XX=ST or SC connector
Where YY=15, 40, or 80

DIMENSIONS

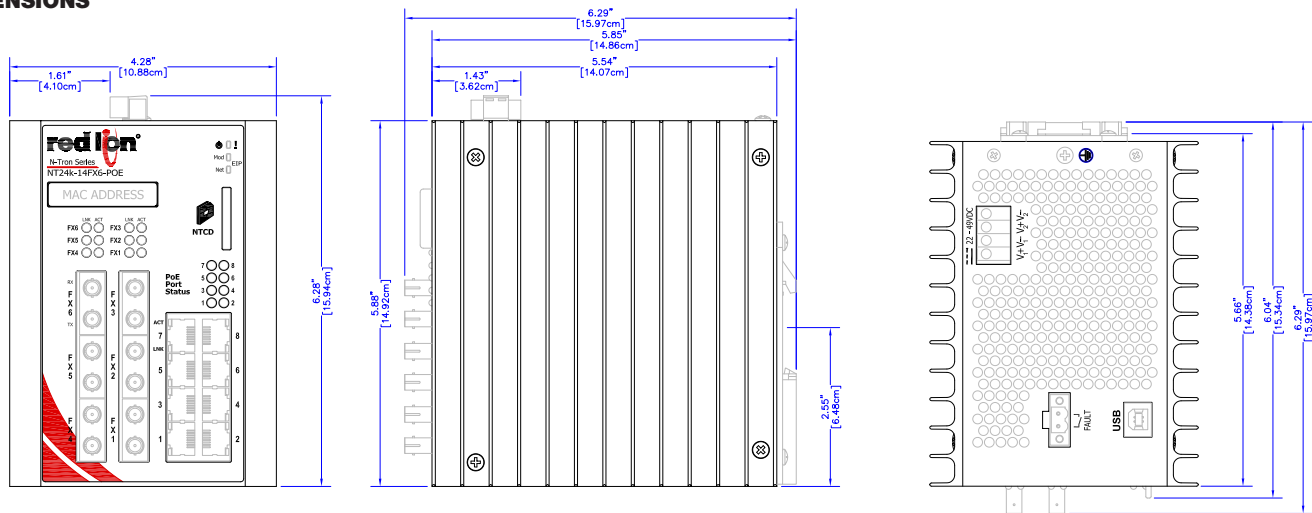

All specifications are subject to change. Consult the company website for more information.



Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

Europe
Middle East
Africa
europe@redlion.net
+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit www.redlion.net. Red Lion is a Spectris company.

ADLD0416 0601119 © 2019 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.