

Q.bloxx XE A105

Measurement Module for Temperature (RTD) and Resistance


Q.bloxx XE is a new addition to the Q.series product family - the ideal EtherCAT DAQ solution for widely distributed installations that require higher performance and custom sensor terminations. Q.bloxx XE measurement modules possess integrated signal conditioning and arithmetic functions, packaged in modular, DIN Rail mountable enclosures that easily snap together for system expansion and are capable of measuring up to 100 kHz per channel with short cycle times and low jitter for accurate synchronization.

- RS-485, 2-wire, EtherCAT (LVDS)
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)
- Configurable PDO mapping to optimize the data throughput
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Power supply 10 ... 30 VDC and DIN rail mounting (EN60715)



Key Features


- 4 analog input channels
Pt100, Pt1000, resistance 400 ohm / 4000 ohm , 2-, 3- or 4- wire connection
- High-precision temperature measurement
max. measurement error 0.05°C, temperature drift 0.02 / 10K (for Pt100)
- High-accuracy digitization
24-bit ADC, 10 Hz sample rate per channel
- Signal conditioning
linearization, filtering, average, scaling, min/max, RMS, arithmetic, alarm
- 3-Way galvanic isolation
Channel to channel, channel to power supply, and channel to bus

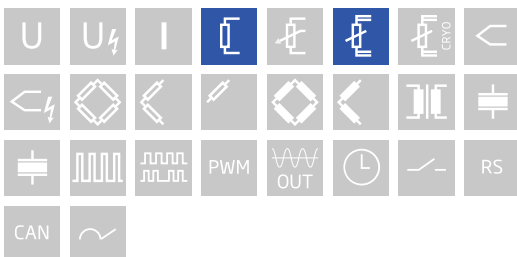

Q.bloxx XE A105



Measurement Module for Temperature (RTD) and Resistance

Block diagram

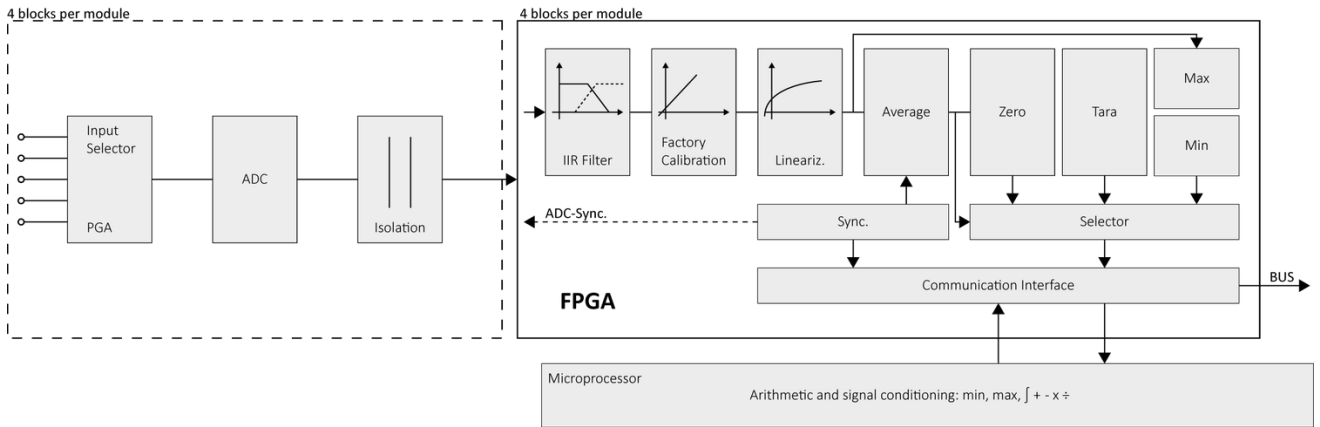

Technical Data

Terminal assignment 10pole screw

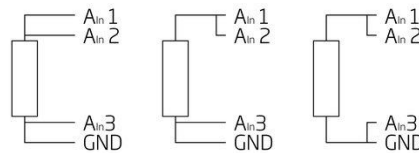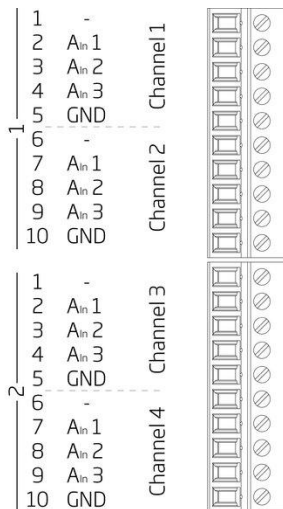

Analog Input

Channels	4
Isolation voltage	500 VDC channel to channel to power supply channel to bus ¹

¹ noise pulses up to 1000 VDC, continuous up to 250 VDC

Pt100 Measurement

Sensor excitation	1 mA pulsed (500 µA effective)	
Input impedance	470 MΩ	
Input range	-200°C to +350°C	-200°C to +850°C
Margin of error	0.05°C	0.08°C
Resolution	0.0001°C	0.0001°C
Temperature drift	0.02°C / 10 K	0.04°C / 10 K
Long-term stability	<0.02°C / 24 h <0.05°C / 8000 h	<0.02°C / 24 h <0.1°C / 8000 h

Q.bloxx XE A105

Measurement Module for Temperature (RTD) and Resistance

Pt1000 Measurement

Sensor excitation	100 μ A pulsed (50 μ A effective)	
Input impedance	470 M Ω	
Input range	-200°C to +850°C	
Margin of error	0.1°C	
Resolution	0.0005°C	
Long-term stability	<0.05°C / 24 hrs	<0.4°C / 8000 hrs
Temperature drift	0.1°C / 10 K	

Resistance Measurement (400 Ω)

Sensor excitation	1 mA pulsed (500 μ A effective)	
Input impedance	470 M Ω	
Range	0 Ω to 400 Ω	
Margin of error	0.015 Ω	
Resolution	0.0002 Ω	
Long-term stability	<10 m Ω / 24 hrs	<20 m Ω / 8000 hrs
Temperature drift	0.01 Ω / 10 K	

Resistance Measurement (230 Ω)

Sensor excitation	1 mA pulsed (500 μ A effective)	
Input impedance	470 M Ω	
Range	0 Ω to 230 Ω	
Margin of error	0.012 Ω	
Resolution	0.0001 Ω	
Long-term stability	<10 m Ω / 24 hrs	<20 m Ω / 8000 hrs
Temperature drift	0.01 Ω / 10 K	

Resistance Measurement (4000 Ω)

Sensor excitation	100 μ A pulsed (50 μ A effective)	
Input impedance	470 M Ω	
Range	0 Ω to 4000 Ω	
Margin of error	0.4 Ω	
Resolution	0.002 Ω	
Long-term stability	<100 m Ω / 24 hrs	<1500 m Ω / 8000 hrs
Temperature drift	0.01 Ω / 10 K	

Resistance Measurement (2300 Ω)

Sensor excitation	100 μ A pulsed (50 μ A effective)	
Input impedance	470 M Ω	
Range	0 Ω to 2300 Ω	
Margin of error	0.23 Ω	
Resolution	0.001 Ω	
Long-term stability	<10 m Ω / 24 hrs	<20 m Ω / 8000 hrs
Temperature drift	0.01 Ω / 10 K	

Q.bloxx XE A105

Measurement Module for Temperature (RTD) and Resistance

Analog to Digital Conversion

Resolution	24-bit
Update rate	10 kHz per channel, reduced by averaging to 10 Hz
Modulation method	sigma-delta
Anti-aliasing filter	500 Hz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, 1st order, frequency range 0.1 Hz, 0.2 Hz, 0.5 Hz, 1 Hz, 2 Hz, 5 Hz, 10 Hz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

Communication Interface EtherCAT

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx. 2.5 W
Input voltage influence	< 0.001 % / V

Environmental Specifications

Electromagnetic compatibility (EMC)	according to IEC 61000-4 and EN 55011
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

Remarks

Are subject to a warm-up period of at least 45 minutes

in a controlled electromagnetic environment¹

With configuration: Low-pass 10Hz²

Specifications subject to change without notice

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

Mechanical information

Material	Aluminum and ABS
Measurements (W x H x D)	30x 145 x 135mm
Weight	approx. 500 g
Protection class	IP20

Ordering Information

Article number	507020
----------------	--------