

Q.raxx XE A105 CR

Measurement Module for Cryogenic Temperature (RTD) and Resistance


Q.raxx XE is an new addition to the Q.series product family - the ideal 19" rackmount EtherCAT DAQ solution for applications that require high channel density and custom sensor terminations. Q.raxx XE DAQ systems can consist of an integrated EtherCAT bus coupler for communication and 10 measurement modules capable of up to 100 kHz sampling per channel with short cycle times and low jitter for accurate synchronization

- According 19"-standard IEC
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- High density and flexibility with 13 modules in one system in any constellation
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)



Key Features


- 4 analog input channels
RTD sensors, resistance 6500 Ω and 20000 Ω, 2-, 3- or 4-wire
- Low excitation current
7.5 μA effective, to minimize sensor self-heating errors
- Individual linearization of the sensor characteristics
Sensor specific linearization by using 32 nodes and archive in a sensor data file. Import of manufacturers calibration data
- High-accuracy digitalization
24-bit ADC, 10 Hz sample rate per channel
- Signal conditioning
linearization, filtering, average, scaling, min/max storage, RMS, arithmetic, alarm
- 3-Way galvanic isolation
Channel to channel, channel to power supply, and channel to bus

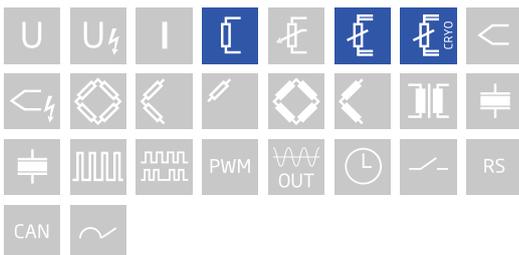

Q.raxx XE A105 CR



Measurement Module for Cryogenic Temperature (RTD) and Resistance

Block diagram

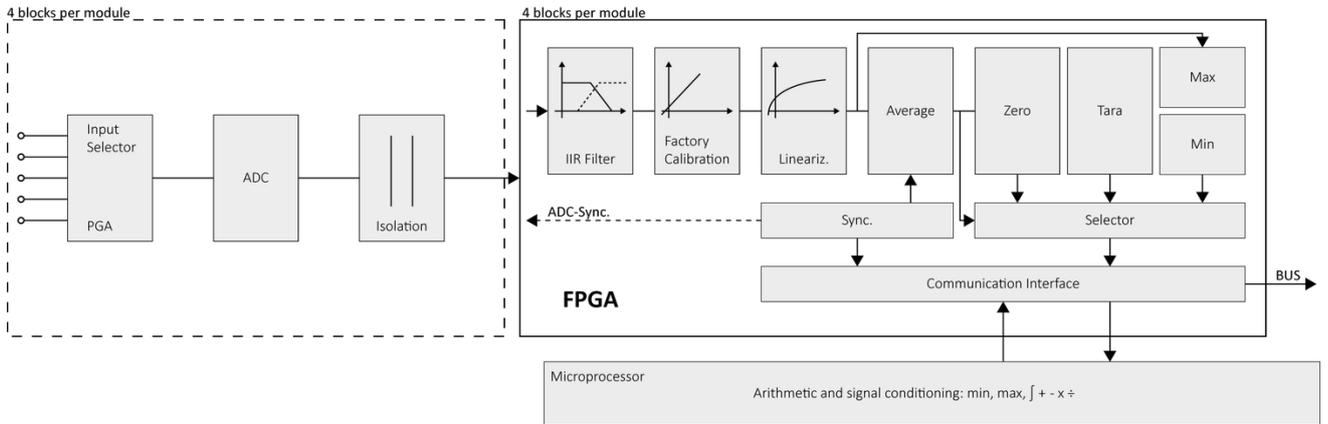

Technical Data

Terminal assignment 10pole screw

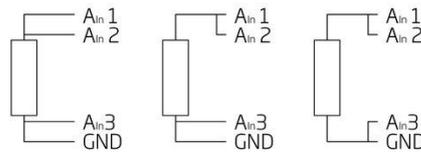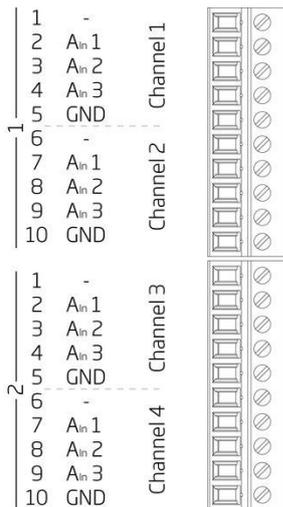

Analog Input

Channels	4
Isolation voltage	500 VDC channel to channel to power supply channel to bus ¹
Sensor excitation	15 μ A max. 7.5 μ A effective

¹ noise pulses up to 1000 VDC, continuous up to 250 VDC

Measurement Mode Resistance (6500 Ω)

Accuracy (4-wire)	0.65 Ω
Resolution	0.01 Ω
Temperature drift	0.5 Ω / 10 K
Long-term stability	0.3 Ω / 24 h 1 Ω / 8000 h

Q.raxx XE A105 CR

Measurement Module for Cryogenic Temperature (RTD) and Resistance

Measurement Mode Resistance (20000 Ω)

Accuracy (4-wire)	2 Ω
Resolution	0.03 Ω
Temperature drift	2 Ω /10 K
Long-term stability	1 Ω / 24 h 3 Ω / 8000 h

Example Cernox CX1050

Range	0 Ω to 6500 Ω	0 Ω to 20000 Ω
Error at 293 K (approx.. 70 Ω)	1 % of measurement value	3 % of measurement value
Error at 100 K (approx.. 150 Ω)	0.5 % of measurement value	1.5 % of measurement value
Error at 5 K (approx.. 3500 Ω)	0.02 % of measurement value	0.05 % of measurement value
Error at 2 K (approx.. 10000 Ω)	-	0.02 % of measurement value

Example TVO CCS A1

Range	0 Ω to 6500 Ω	0 Ω to 20000 Ω
Error at 293 K (approx.. 850 Ω)	0.075 % of measurement value	0.25 % of measurement value
Error at 100 K (approx.. 1160 Ω)	0.06 % of measurement value	0.2 % of measurement value
Error at 5 K (approx.. 3900 Ω)	0.02 % of measurement value	0.06 % of measurement value
Error at 2 K (approx.. 11000 Ω)	-	0.02 % of measurement value

Analog to Digital-Conversion

Resolution	24-bit
Update rate	10 kHz, reduced by averaging to 10 Hz
Modulation method	Sigma-Delta
Anti-aliasing filter	500 Hz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 10 Hz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

Power Supply

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx. 2.5 W
Input voltage influence	< 0.001 % / V

Communication Interface EtherCAT

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 % to 95 % at 50°C, non-condensing

Q.raxx XE A105 CR

Measurement Module for Cryogenic Temperature (RTD) and Resistance

Remarks

Are subject to a warm-up period of at least 45 minutes

in a controlled electromagnetic environment¹

With configuration: Low-pass 10Hz²

Specifications subject to change without notice

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 128 x 120mm
Weight	approx. 200 g

Ordering Information

Article number	615222
----------------	--------

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com