

Q.bloxx XE A108 MEMS-2M3

I/O module for 2 tri-axis MEMS sensors


Q.bloxx XE is a new addition to the Q.series product family - the ideal EtherCAT DAQ solution for widely distributed installations that require higher performance and custom sensor terminations. Q.bloxx XE measurement modules possess integrated signal conditioning and arithmetic functions, packaged in modular, DIN Rail mountable enclosures that easily snap together for system expansion and are capable of measuring up to 100 kHz per channel with short cycle times and low jitter for accurate synchronization.

- RS-485, 2-wire, EtherCAT (LVDS)
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)
- Configurable PDO mapping to optimize the data throughput
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Power supply 10 ... 30 VDC and DIN rail mounting (EN60715)



Key Features


- I/O module for 2 tri-axis MEMS sensors
2 DSUB9 input sockets
Sensor supply galvanic isolated
- 6+2 Analog input channels
AI1,AI2,AI3 differential /single-ended switchable in groups
AI5,AI6,AI7 differential /single-ended switchable in groups
AI4,AI8 single-ended (e.g. for temperature input/compensation)
- High-accuracy digitization
24-bit ADC, 20 kHz sample rate per channel
- Signal conditioning
linearization, filtering, average, scaling, min/max, RMS, arithmetic, alarm
- 3-Way galvanic isolation
Channel to channel, channel to power supply, and channel to bus

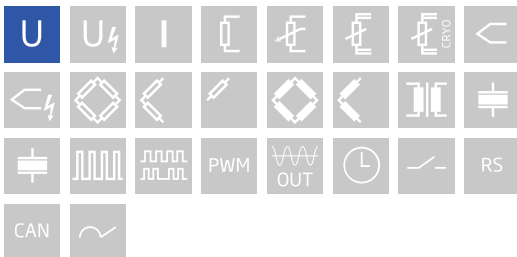

Q.bloxx XE A108 MEMS-2M3

I/O module for 2 tri-axis MEMS sensors

Block diagram

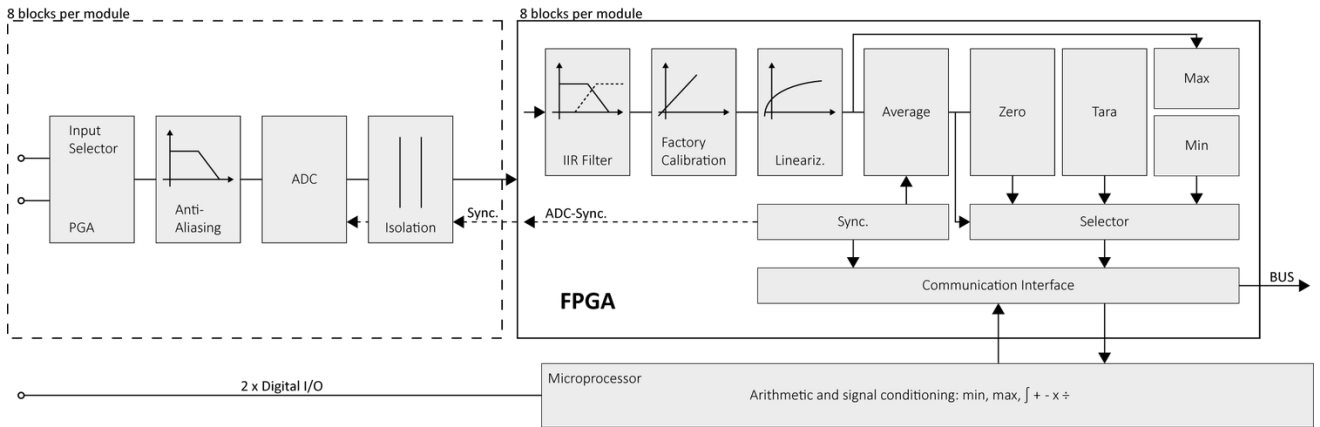

Technical Data

Pin assignment DSUB 9

Pin		
1		Power
2		Return
3		X +
4		Y +
5		Z +
6		X -
7		Y -
8		Z -
9		Temp
		Supply +15 V
		Supply GND
		X-axis +
		Y-axis +
		Z-axis +
		X-axis -
		Y-axis -
		Z-axis -
		temperature

Analog Input

Channels	6 + 2 AI1, AI2, AI3 differential / single ended, switchable in groups AI5, AI6, AI7 differential / single ended, switchable in groups AI4, AI8 single ended (e.g. for temperature input/compensation)
Accuracy	0.01 % typical 0.025 % in controlled environment ¹ 0.05 % in industrial area ²
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 hrs)
Isolation voltage	500 VDC channel to channel, to power supply, and channel to bus ³

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Q.bloxx XE A108 MEMS-2M3

I/O module for 2 tri-axis MEMS sensors

Voltage Measurement

Input range	±10 VDC	
Margin of error	±2 mV	
Resolution	1.5 µV	
Long-term stability	<50 µV / 24 hrs	<200 µV / 8000 hrs
Temperature drift	<200 µV / 10 K Offset drift	<100 ppm / 10 K Gain drift
Signal-to-noise ratio	>100 dB at 100 Hz	>120 dB at 1 Hz
Input impedance	> 1 MΩ	
Overvoltage protection	± 200 V	

Analog-to-Digital Conversion

Resolution	24-bit
Sample rate	20 kHz per channel
Modulation method	sigma-delta
Anti-aliasing filter	2 kHz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 1 kHz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

Sensor excitation

Channels	2
Voltage	15 V
Current	max. 40 mA (short circuit proof)
Accuracy	< 3 %
Load regulation	< 0.1 %
Noise	1.2 mV (RMS)

Communication Interface

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	3.5 W (approx.)
Input voltage influence	<0.001 % / V

Environmental Specifications

Electromagnetic compatibility (EMC)	according to IEC 61000-4 and EN 55011
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

Q.bloxx XE A108 MEMS-2M3

I/O module for 2 tri-axis MEMS sensors

Remarks

Are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Mechanical information

Material	Aluminum and ABS
Measurements (W x H x D)	30x 145 x 135mm
Weight	approx. 500 g
Protection class	IP20

Ordering Information

Article number	586330
----------------	--------

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com