Q.raxx XE D104






Q.raxx XE is an new addition to the Q.series product family - the ideal 19" rackmount EtherCAT DAQ solution for applications that require high channel density and custom sensor terminations. Q.raxx XE DAQ systems can consist of an integrated EtherCAT bus coupler for communication and 10 measurement modules capable of up to 100 kHz sampling per channel with short cycle times and low jitter for accurate synchronization

- According 19 "-standard IEC
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- High density and flexibility with13 modules in one system in any constellation
- FoE (file access over EtherCAT, ETG.1000.5) and CoE (CAN over EtherCAT, ETG.50001.1)



Key Features

- 16 Digital inputs status, single bit or bitset
- Configurable logic TTL or 24 VDC (according IEC 61131-2, Type 1)
- Fast response time 10 µs per channel
- 3-Way galvanic isolation Group to group, group to power supply, and bank

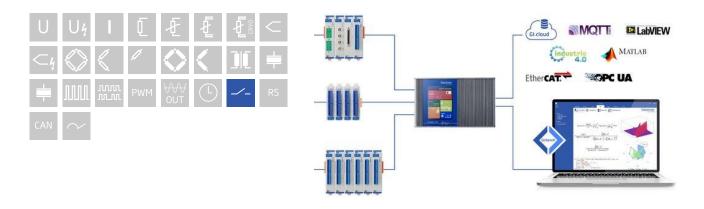


Q.raxx XE D104



Digital Input Module

Technical Data

Terminal assignment 10pole screw



$$\begin{array}{c} \bullet + \bigvee 1 \\ D_{lN} \\ D_{ln} \\ \end{array}$$

Digital Input

Channels	16
Mode(s) of operation	status
Logic levels	TTL or 24 VDC according to IEC 61131-2, Type 1
TTL logic voltage	< 0.8 VDC (Low) > 3 VDC (High)
24 VDC logic voltage	-3 to 5 VDC (Low) 11 to 30 VDC (High)
Input type	PNP (current sinking)
Response time	10 μs
Input voltage	30 VDC max.
Input current	2 mA max.
Isolation voltage	500 VDC, group to group, group to power supply, channel to bus ¹

 $^{^{\}rm 1}$ noise pulses up to 1000 VDC, continuous up to 250 VDC

Communication Interface EtherCAT

Electrical standard	RS-485, 2-wire
Protocols	EtherCAT (LVDS)

Power Supply

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	2 W (approx.)
Input voltage influence	<0.001%/V

Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

Q.raxx XE D104



Digital Input Module

Remarks

Are subject to a warm-up period of at least 45 minutes Specifications subject to change without notice

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 128 x 120mm
Weight	approx. 200 g

Ordering Information

Article number	532927

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com www.gantner-instruments.com