

## High Isloation Module for Thermocouples


Q.raxx XL is a new addition to the Q.series product family - the ideal 19" rackmount DAQ solution for applications that require high channel density and custom sensor terminations. Q.raxx XL DAQ systems can utilize an integrated, high-performance controller for communication, control, and data logging purposes. With a controller, multiple Q.raxx XL systems can be synchronized to each other allowing for efficient DAQ distribution with low jitter and gradual expansion up to thousands of channels.

- High Density up to 13 I/O modules per Q.raxx 3U chassis with up to 16 channels per I/O module
- User Friendly front panel indicators for module status, power, and input range error
- Fully Customizable multiple front panel termination options available
- Maximum Flexibility parallel communication available in TCP/IP, CAN, PROFIBUS, Modbus, and EtherCAT
- Gantner's Quality Standard integrated filtering, galvanic isolation & signal/sensor conditioning per channel



#### **Key Features**


- 4 galvanically isolated input channels for non-insulated thermocouples at high potential
- Cold junction compensation
- Signal conditioning digital filter, average, scaling, min/max storage, arithmetic, alarm
- Dynamic linearization Optimum positioning of interpolation points in selected range, types B, E, J, K, L, N, R, S, T, U
- High accuracy digitalization 24 bit ADC, 20 kHz sample rate per channel
- Galvanic isolation channel to channel to power supply and to interface
- Categories 1000 V CAT II and 600 V CAT III

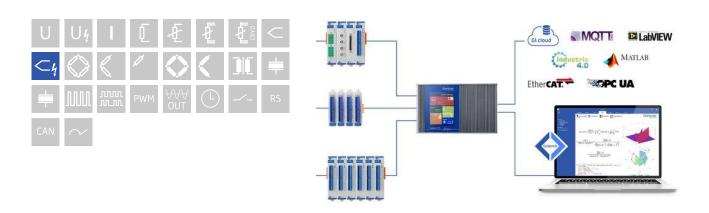



## High Isloation Module for Thermocouples

## Block diagram

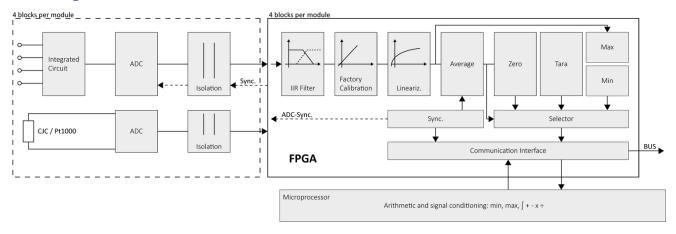


#### **Technical Data**

#### **Analog Inputs**

Channels	4
isolation voltage	1200 VDC continuous, channel to channel ##to-pwer## channel to bus¹

 $<sup>^1</sup>$  High voltage lifetime (TDDB E Model): time to fail approx. 4 years at 1200 VDC and 60  $^{\circ}\text{C}$ 

#### Terminal assignment 2pole PushPull





## High Isloation Module for Thermocouples

#### Measurement Mode Thermocouple

	Туре	Range	error
	Type B	400 °C to 1820 °C	< ± 1.5 °C
	Type E, J, K	-100 °c to 1000 °C	< ± 0.5 °C
	Type E	-270 °C to 1000 °C	< ± 0.8 °C
	Type K	-270 °C to 1372 °C	< ± 0.8 °C
	Type L	-200 °C to 900 °C	< ± 0.5 °C
	Type N	-100 °C to 1000 °C	< ± 0.5 °C
	Type N	-270 °C to 1300 °C	< ± 0.8 °C
	Type R, S	-50 °C to 1768 °C	< ±1°C
	Type T, U	-100 °C to 400 °C	< ± 0.5 °C
	Туре Т	-270 °C to 400 °C	< ± 0.8 °C
Input impedance	> 100 MΩ		
Long-term drift	< 0.05 °C / 24 h		< 0.5 °C / 8000 h
Temperature influence	Offset drift		Gain drift
	< 0.02 °C / 10 K		< 0.025 & / 10K
Uncertainty cold junction compensation	< 0.5 °C		

## Analog/Digital Conversion

Resolution	24-bit
Update rate	20 kHz
Modulation method	Sigma-Delta
Anti-aliasing filter	1000 Hz,2nd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 100 Hz (adjustable via software)
Averaging	configurable or automatic according to the selected data rate

#### Communication Interface Localbus

	proprietary Localbus (115200 bps to 48 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

### Power Supply

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx 2 W
Input voltage influence	<0.001 %/V

### Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 % to 95 % at 50°C, non-condensing
Pollution degree	1



## High Isloation Module for Thermocouples

#### Remarks

Are subject to a warm-up period of at least 45 minutes

in a controlled electromagnetic environment1

With configuration: Low-pass 10Hz2

Specifications subject to change without notice

- 1 according to EN 61326 2006: appendix B
- <sup>2</sup> according to EN 61326 2006: appendix A

#### High Voltage Warnings



- Attention! High voltage device! Danger to life and health in case of non regular use.
- Only special and sufficient educated persons are permitted to handle this device only.
- All metal housing parts must be safe and permanently connected to protected earth PE.
- Only contact protection plugs and cables may be used. All parts must be approved for voltages up to 1200
- During installation, the whole system must be without voltage and safely be disconnected from the mains.
- All relevant safety regulations must be considered.
- Do not operate with damaged casing.

Base is the european standard EN61010-1

#### Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 128 x 120mm
Weight	approx. 200 g

#### Ordering Information

Article number	531219

#### **Gantner Instruments**

Austria | Germany | France | Sweden | India | USA | China | Singapore Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com www.gantner-instruments.com