

# QuSpot for Robustel R3000 Lite

## INTEGRATED MULTI-BAND LTE OMNI ANTENNA + POE SPLITTER + PLACE TO INSTALL ROBUSTEL R3000 Lite (ALL-IN-ONE)

QuSpot all-in-one antenna for Robustel R3000 Lite router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni LTE antenna. If you use R3000 Lite with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.



OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67



GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET




ANTENNA PERFECTLY MATCHED WITH THE ROBUSTEL R3000 LITE



ALL ANTENNAS AND ROBUSTEL ROUTER INTEGRATED IN ONE ENCLOSURE



MADE IN EUROPE

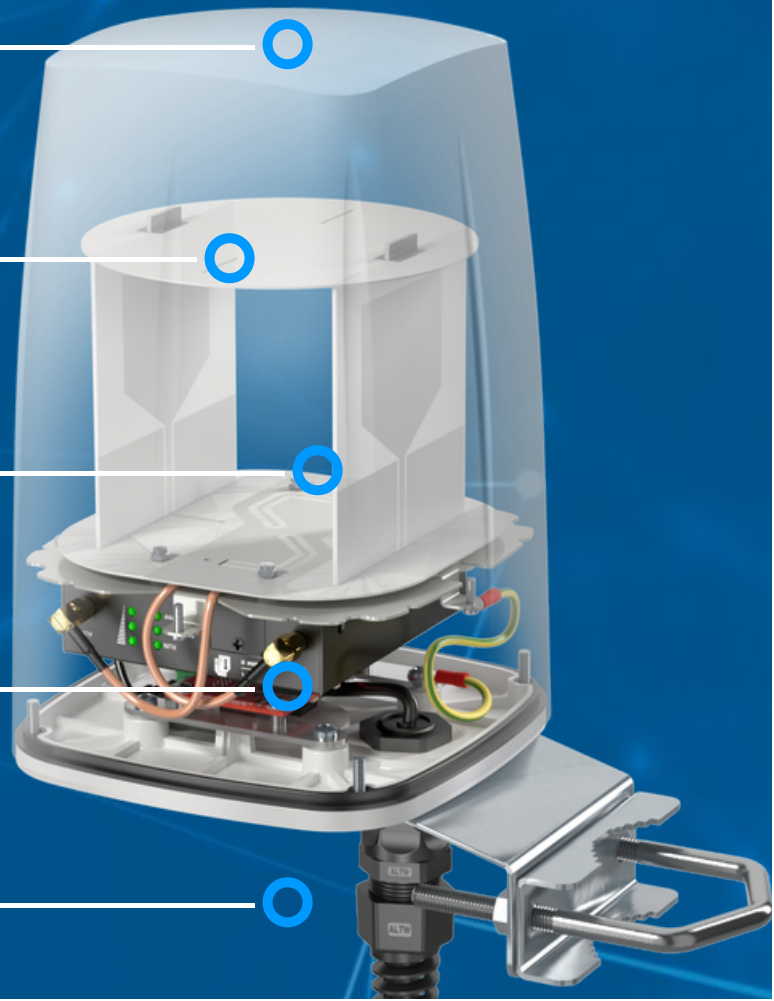

## LTE ANTENNA SPECIFICATION

<b>FREQUENCY</b>	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
<b>GAIN</b>	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
<b>SUPPORTED LTE/5G BANDS</b>	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
<b>VSWR</b>	<1.60, max <2.00
<b>BEAMWIDTH</b>	360°/35° ±5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## MECHANICAL SPECIFICATION

<b>MATERIALS</b>	ABS, aluminum, PTFE
<b>CONNECTOR TYPE</b>	RJ45
<b>INGRESS PROTECTION</b>	IP67
<b>DIMENSIONS</b>	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
<b>WEIGHT</b>	1.5 kg 3.31 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 80°C From -40°F to 176°F
<b>MAST DIAMETER</b>	40-60 mm 1.57-2.36 inch

## FREQUENCY BANDS

<b>LTE / 4G GSM</b>	<table border="1"> <tr> <td>5</td><td>6</td><td>8</td><td>12</td><td>13</td><td>14</td><td>17</td> </tr> <tr> <td>18</td><td>19</td><td>20</td><td>26</td><td>27</td><td>28</td><td>29</td> </tr> <tr> <td>44</td><td>67</td><td>68</td><td>85</td><td>n81</td><td>n82</td><td>n83</td> </tr> <tr> <td>n89</td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>617 MHz <span style="float: right;">960 MHz</span></p>	5	6	8	12	13	14	17	18	19	20	26	27	28	29	44	67	68	85	n81	n82	n83	n89						
5	6	8	12	13	14	17																							
18	19	20	26	27	28	29																							
44	67	68	85	n81	n82	n83																							
n89																													
<b>LTE / 4G UMTS</b>	<table border="1"> <tr> <td>1</td><td>2</td><td>3</td><td>4</td><td>9</td><td>10</td><td>25</td> </tr> <tr> <td>33</td><td>34</td><td>35</td><td>36</td><td>37</td><td>39</td><td>59</td> </tr> <tr> <td>62</td><td>n80</td><td>n84</td><td>n86</td><td>n95</td><td></td><td></td> </tr> </table> <p>1710 MHz <span style="float: right;">2170 MHz</span></p>	1	2	3	4	9	10	25	33	34	35	36	37	39	59	62	n80	n84	n86	n95									
1	2	3	4	9	10	25																							
33	34	35	36	37	39	59																							
62	n80	n84	n86	n95																									

LTE / 4G WCS DARS

2300 MHz

2400 MHz


LTE / 4G

2400 MHz


2700 MHz

## PLOTS



### VSWR

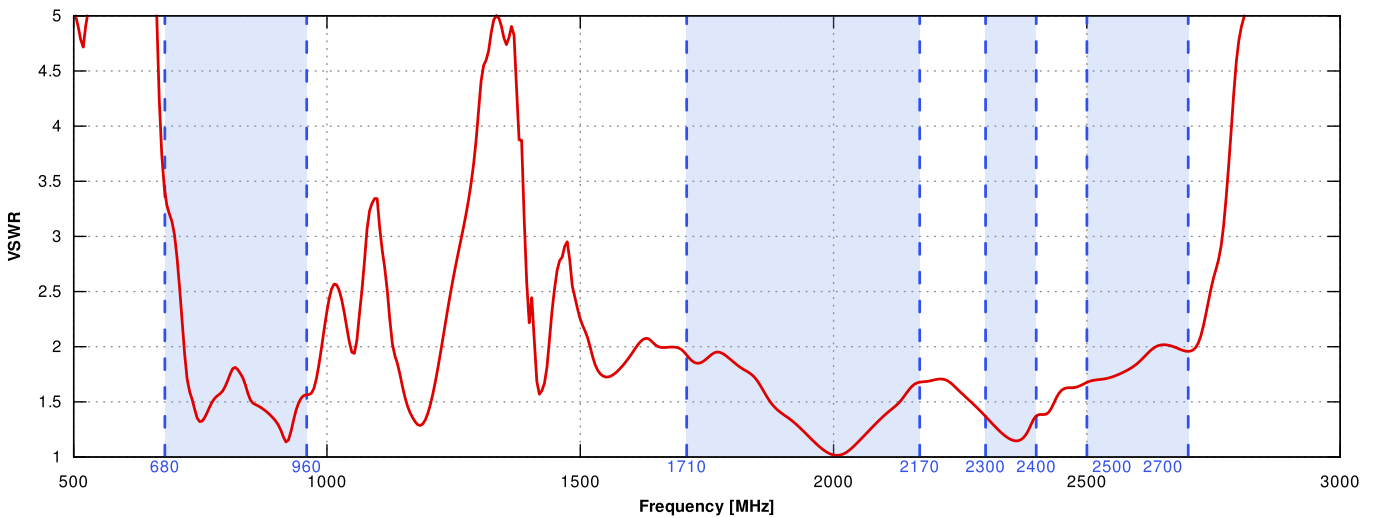



### Gain

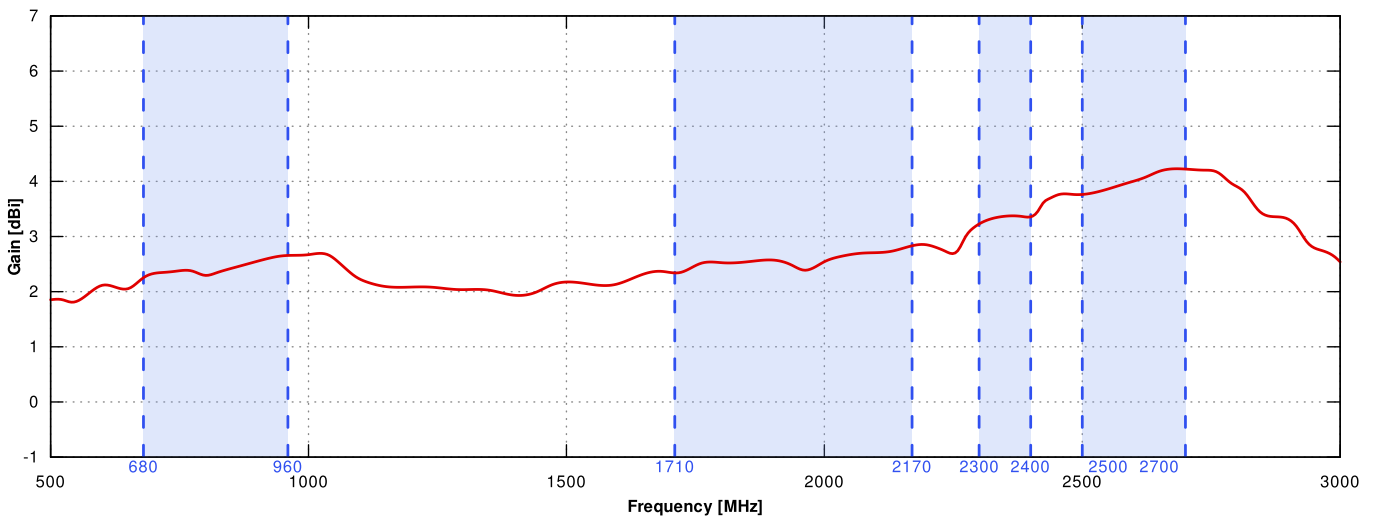


From 700MHz to 900MHz

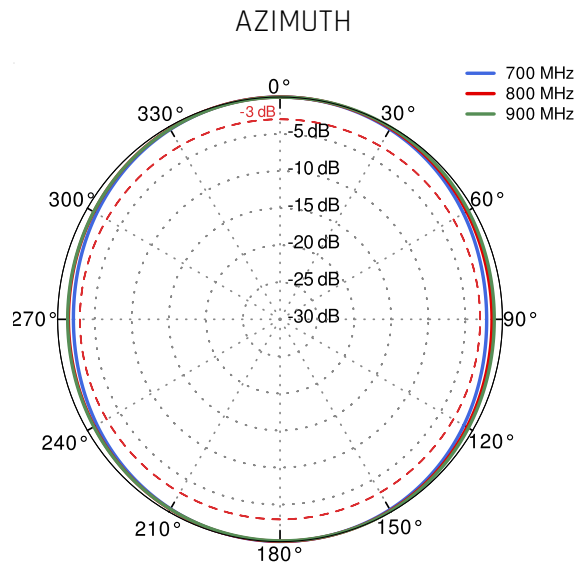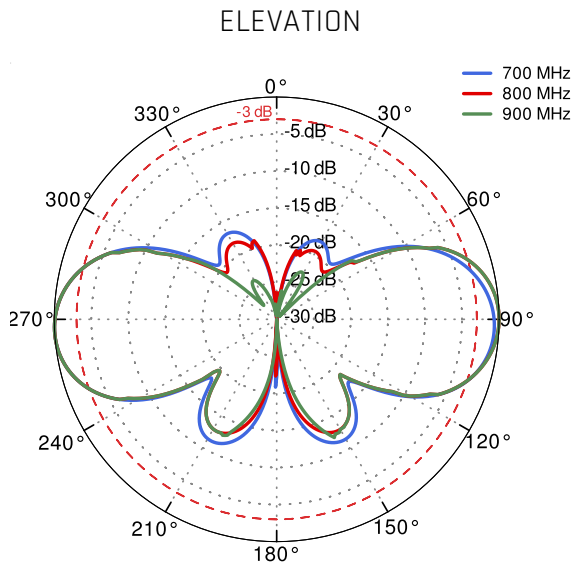

From 1.71GHz to 2.17GHz

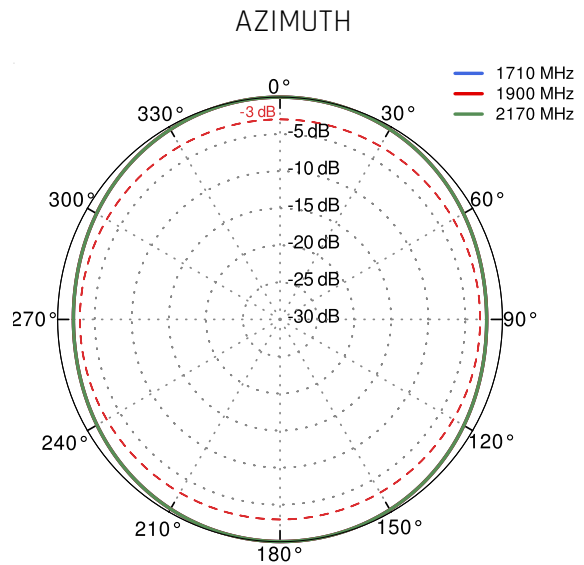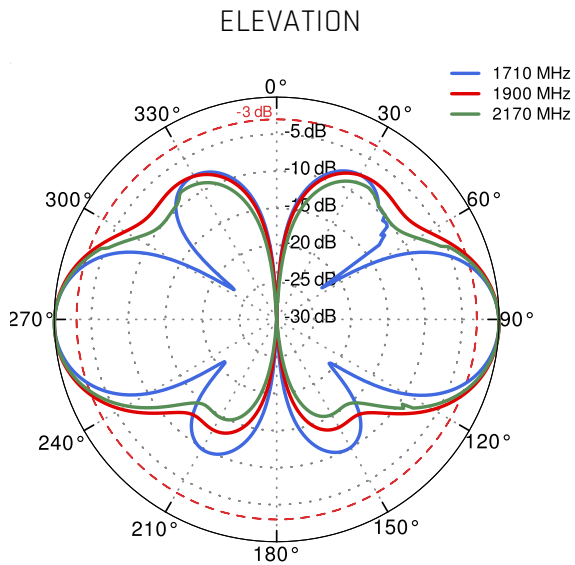

From 2.3GHz to 2.7GHz

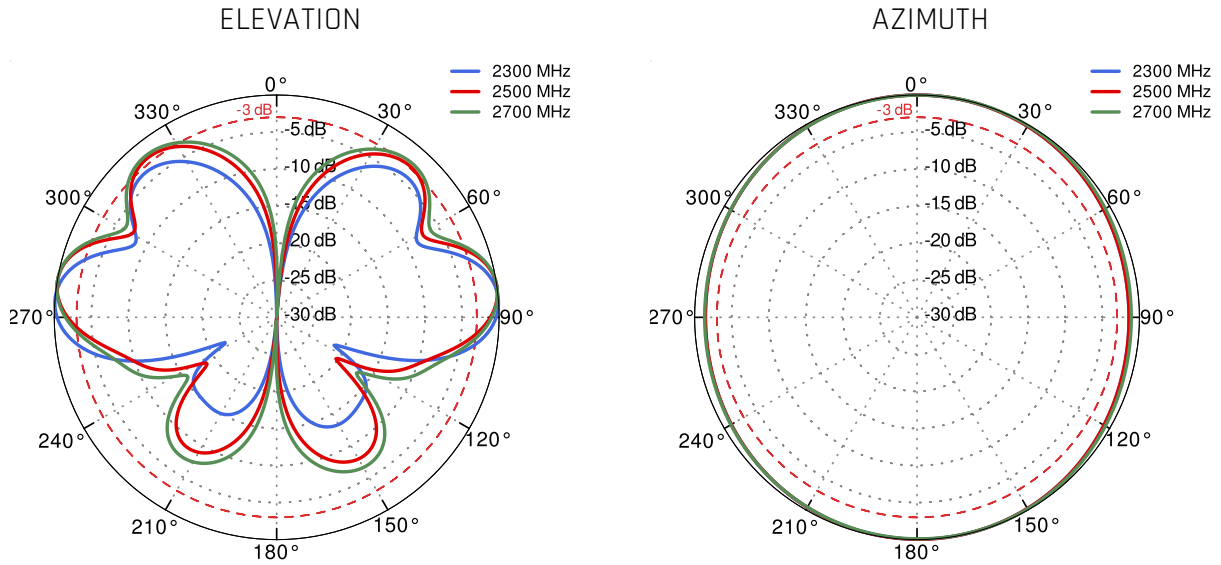

## **DIMENSIONS**

