# HS-100IS Intrinsically Safe Accelerometer AC acceleration output via PUR Cable

## **Key Features**


· Intrinsically Safe with European, USA, South African and Australian approvals

· Side entry for easy access

## Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



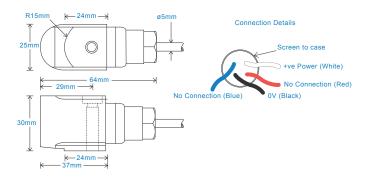


## **Technical Performance**

Mounted Base Resonance	see 'How To Order' table (nominal)	(
Sensitivity	see: 'How To Order' table ±10%	5
	Nominal 80Hz at 22°C	N
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) ± 5%	1
	1.5Hz (90cpm) to 12kHz (720kcpm) ± 10%	١
	0.8Hz (48cpm) to 15kHz (900kcpm) ± 3dB	1
Isolation	Base isolated	9
Range	see: 'How To Order' table	3
Transverse Sensitivity	Less than 5%	1
		5

Mechanical	
Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Mounting Bolt Provided	see: 'How To Order' table x 30mm long
Weight	185gms (nominal)
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	PUR - length to be specified with order
Mounting Threads	see: 'How To Order' table
Submersible Depth	100 metres max (10 bar)

Electrical		Environmental		
Electrical Noise	0.1mg max	Operating Temperature Range	see: attached certification details	
Current Range	0.5mA to 8mA	Sealing	IP68	
Bias Voltage	10 - 12 Volts DC	Maximum Shock	5000g	
Settling Time	2 seconds	EMC	EN61326-1:2013	
Output Impedance	200 Ohms max.			
Case Isolation	>10 <sup>8</sup> Ohms at 500 Volts			


## Typical Frequency Response (at 100mV/g)



## Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



## Certifications













www.hansfordsensors.com sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice TS151.9




## HS-100IS Intrinsically Safe Accelerometer AC acceleration output via PUR Cable

Intrinsically Safe Requirements							
	Maximum Cable Length	Up to 300 metres dependent on cable	Certified	Temperature Range	Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +60°C) (Gas)		
		- see attached system drawing		Ex ia IIIC	T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C) (Dust)		
				E	x ia IIC T4 Ga (-55°C ≤ Ta ≤ +110°C) (Gas)*		
	Certificate details: Group I	IECEx BAS07.0037X	Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C) (Dust)*				
		Baseefa07ATEX0149X			Ex ia I Ma (-55°C ≤ Ta ≤ +110°C) (Mining)		
		🖾 I M1			*On request - consult Sales Office		
		Ex ia I Ma					
		(-55°C ≤ Ta ≤ +110°C)	ITACS G	roup I	IECEx ITA 11.0013X		
					Ex ia I Ma		
	Certificate details: Group II	IECEx BAS07.0035X			(-55°C ≤ Ta ≤ +110°C)		
	(ignition temperature 130°C)	Baseefa07ATEX0144X					
		🖾 II 1GD	US/Cana	ada Approvals	Certificate No. USTC/15/FAI/01350		
		Ex ia IIC T4 Ga	CI	ass I, II, III, Division 1,	2, Groups A - G, T4, -55°C to +110°C, IP65		
		Ex ia IIIC T130°C IP65 Da	Class I, Zone 0, AEx, ia, IIC, T4, Ga, -55°C to +		one 0, AEx, ia, IIC, T4, Ga, -55°C to +110°C		
		(-55°C ≤ Ta ≤ +110°C)	Zone 20, AEx, ia, IIIC, T130°C, IP65, Da, -55°C to +1°		ia, IIIC, T130°C, IP65, Da, -55°C to +110°C		
	Certificate details: Group II	IECEx BAS07.0035X		Class I, II, III, Divi	ision 1, 2, Groups A - G, T6, -55°C to +60°C		
	(ignition temperature 80°C)	Baseefa07ATEX0144X	Class I, Zone 0, AEx, ia, IIC, T6, Ga, -55°C to +60				
		🕲 II 1GD	Zone 20, AEx, ia, IIIC, T80°C, IP65, DA, -55°C to +60°		x, ia, IIIC, T80°C, IP65, DA, -55°C to +60°C		
		Ex ia IIC T6 Ga					
		Ex ia IIIC T80°C IP65 Da	South Af	rican Approval	Certificate No. MASC S/16-0231X		
		(-55°C ≤ Ta ≤ +60°C)			Group II (As Baseefa/ATEX)		
					MASC M/16-0230X		
	Accelerometer System Certificate	Baseefa07Y0145			Group I (As Baseefa/ATEX)		
		Ex ia IIC T6 (-55°C ≤ Ta ≤ +60°C)					
		Ex ia IIC T4 (-55°C ≤ Ta ≤ +110°C)	System (	Connections	see attached system drawings		
		On request - consult Sales Office					
			Barrier		1 x Pepperl + Fuchs Galvanic Isolator		
	Terminal Parameters	Ui = 28V, Ii = 93mA, Pi = 0.65W			KFD2-VR4-Ex1.26 (BAS02ATEX7206)		
		Ci = 83nf			see attached system drawings		
		Li/Ri = 15.4µH/Ohm		1 x MIL 2	Zener Barrier MTL7728+ (BAS01ATEX7217)		
					or Pepperl + Fuchs Zener Barrier		
	500V Isolation	Units Will Pass A 500V Isolation Test		2728	(BAS01ATEX7005) or any other barrier that		
					conforms to system drawings on website		
			N t	0			
			Notes:		of safe use for Group I & II. The free end of		
				the cable on the inte	gral cable version of the apparatus must be		

the cable on the integral cable version of the apparatus must be terminated in an appropriate dust-proof enclosure.

## How To Order

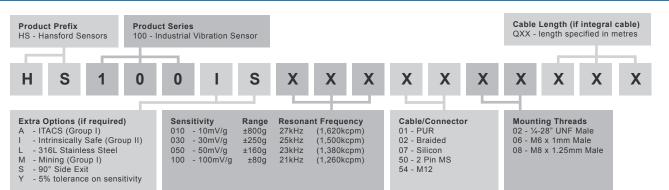



www.hansfordsensors.com sales@hansfordsensors.com

CE

R