

Q.brixx XL A107

Universal Measurement Module



Q.brixx XL is a new addition to the Q.series product family - the ideal DAQ solution for on-the-go applications requiring higher performance in potentially harsh environments. Q.brixx XL DAQ systems consist of up to 16 measurement modules and an integrated, high-performance controller for communication, control, and data logging purposes, all within a robust aluminum housing capable of withstanding severe shock and vibration without sacrificing performance.

- High density and flexibility with 16 modules in one system in any constellation
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Connectable to Controller Q.station
- Power supply 10 ... 30 VDC




Key Features

- 4 Universal analog input channels
voltage, current, resistance, potentiometer, RTD (Pt100 / Pt1000), thermocouple, strain gage
- High-accuracy digitization
24-bit ADC, 20 kHz sample rate per channel
- Signal conditioning
linearization, filtering, average, scaling, min/max, RMS, arithmetic, alarm
- 3-Way galvanic isolation
500 VDC channel to channel, channel to power supply, and channel to bus
- Electromagnetic compatibility (EMC)
according to IEC 61000-4 and EN 55011

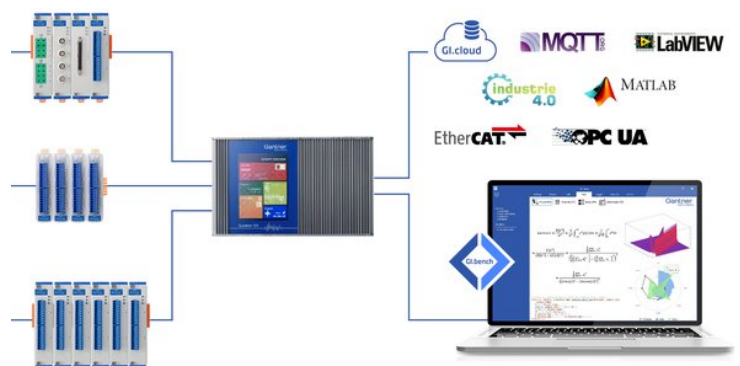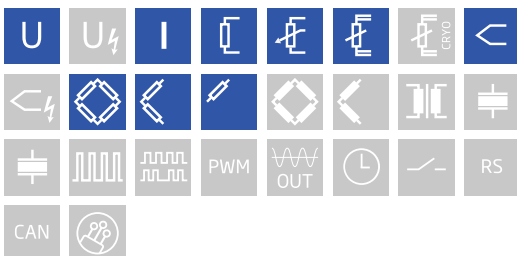

Block diagram

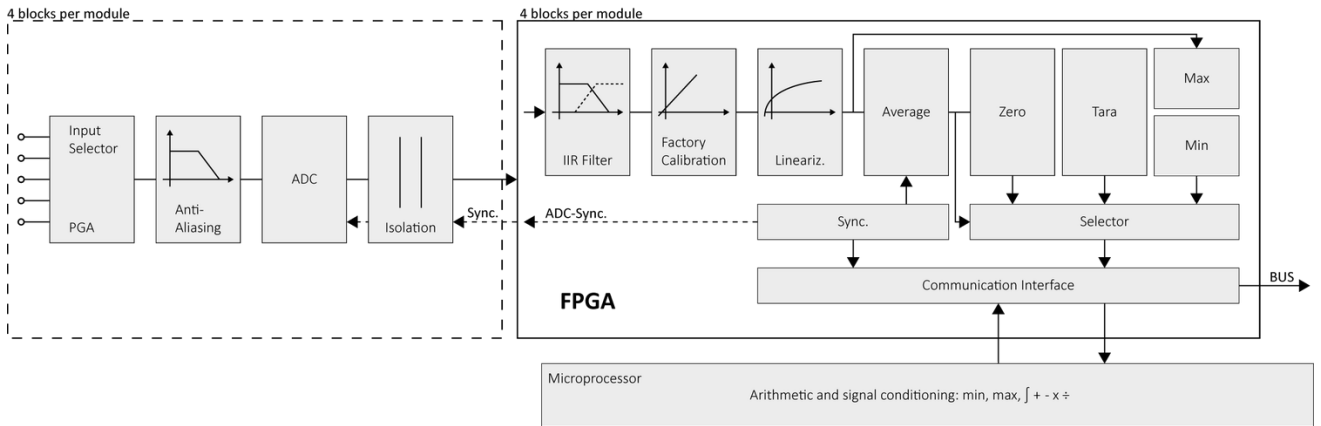

Technical Data

Analog Input

Channels	4
Accuracy	0.01 % typical 0.02 % in controlled environment ¹ 0.05 % in industrial area ²
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 hrs)
Isolation voltage	500 VDC channel to channel, to power supply, channel to bus ³

¹ according to EN 61326 2006: appendix B

² according to EN 61326 2006: appendix A

³ noise pulses up to 1000 VDC, continuous up to 250 VDC

Voltage Measurement

Range and error	input range	margin of error	resolution
	±10 V	±2 mV	1.2 µV
	±1 V	±200 µV	120 nV
	±100 mV	±20 µV	12 nV
Long term stability	input range	24 hrs	8000 hrs
	±10 V	<200 µV	<2000 µV
	±1 V	<20 µV	<200 µV
	±100 mV	<2 µV	<20 µV
Temperature drift	input range	Offset drift	Gain drift
	±10 V	<500 µV / 10 K	<0.01 % / 10 K
	±1 V	<50 µV / 10 K	<0.01 % / 10 K
	±100 mV	<5 µV / 10 K	<0.01 % / 10 K
Signal-to-noise ratio	>90 dB at 1 kHz	>120 dB at 1 Hz	
input impedance	> 100 MΩ		

Current Measurement

Input range	±25 mA (Internal shunt resistor 50 Ω)	
Margin of error	±5 µA	
Resolution	3 nA	
Long term stability	<0.5 µA / 24 hrs	<5 µA / 8000 hrs
Temperature drift	<1 µA / 10 K Offset drift	<0.03 % / 10 K Gain drift

Potentiometer Measurement

Resistance range	1 kΩ to 10 kΩ	
Long term stability	<0.02 % / 24 hrs	<0.2 % / 8000 hrs
Temperature drift	<0.0001 / 10 K Offset drift	<0.03 % / 10 K Gain drift

Resistance / RTD Measurement

Range and error	input range	margin of error	resolution
Resistance, 2-wire	100 kΩ	±100 Ω	12 mΩ
Resistance, 2-, 3- and 4-wire	4 kΩ	±1 Ω	0.5 mΩ
Resistance, 2-, 3- and 4-wire	400 Ω	±0.1 Ω	48 µΩ
Pt100, 2-, 3- and 4-wire	-200 to +850°C	±0.25°C	0.2 m°C
Pt1000, 2-, 3- and 4-wire	-200 to +850°C	±1°C	0.2 m°C
Sensor excitation	640 µA pulsed (< 4 kΩ) 15 µA pulsed (> 4 kΩ)		
Long term stability	<10 mΩ / 24 hrs	<100 mΩ / 8000 hrs	
Temperature drift (range 400 Ω)	<10 mΩ / 10 K Offset drift	<0.03 % / 10 K Gain drift	

Thermocouple Measurement

Range and error	Type	range	margin of error with CJC ¹
	Type B	400°C to 1820°C	< ±1.5 °C
	Type E, J, K	-100 to 1000°C	< ±0.7°C
	Type E	-270°C to 1000°C	< ±1°C
	Type K	-270°C to 1372°C	< ±1°C
	Type L	-200°C to 900°C	< ±0.7°C
	Type N	-100°C to 1000°C	< ±0.7°C
	Type N	-270°C to 1300°C	< ±1°C
	Type R, S	-50°C to 1768°C	< ±1.2°C
	Type T, U	-100°C to 400°C	< ±0.7°C
	Type T	-270°C to 400°C	< ±1°C
Input impedance	> 10 MΩ		
Long term stability	<0.1°C / 24 hrs	<0.2°C / 8000 hrs	
Temperature drift	<0.2°C / 10 K Offset drift	<0.025% / 10 K Gain drift	
CJC uncertainty	<0.3°C		

¹ specifications are only valid with mains frequency rejection enabled

Strain Gage Measurement

Bridge configuration(s)	resistive full-bridge (4-wire) resistive half-bridge (3-wire, with bridge completion terminal) resistive quarter-bridge 120 Ω or 350 Ω (3-wire, with bridge completion terminal)	
Accuracy class	0.05	
Allowable bridge resistance	>100 Ω	
Bridge excitation (nominal)	2.5 VDC	
Input range	±2.5 mV/V ±50 mV/V ±500 mV/V	
Long term stability (range 2.5 mV/V)	<0.12 μV/V / 24 hrs	<1.25 μV/V / 8000 hrs
Temperature drift (range 2.5 mV/V)	<0.2 μV/V / 10 K Offset drift	<0.05 % / 10 K Gain drift

Analog to Digital Conversion

Resolution	24-bit	
Sample rate	20 kHz per channel (thermocouple 10 Hz)	
Modulation method	sigma-delta (group delay time 600 μs)	
Anti-aliasing filter	2 kHz, 3rd order	
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 1 kHz (adjustable via software)	
Averaging	configurable or automatic according to the user-defined data rate	

Communications Interface Localbus

Protocols	proprietary Localbus (115200 bps to 48 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU	
Data format	8E1	
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire	

Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection	
Power consumption	2.5 W (approx.)	
Input voltage influence	<0.001 % / V	

Environmental Specifications

Operating temperature	-20°C to +60°C	
Storage temperature	-40°C to +85°C	
Relative humidity	5 - 95 % at 50°C (non-condensing)	

Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

Q.brixx XL A107

Universal Measurement Module

Mechanical information

Material	Aluminum
Measurements (W x H x D)	30x 145 x 135mm
Weight	approx. 500 g

Ordering Information

Article number	522724
Accessories	Terminal B4/120-A107, article number 894589
	Terminal B4/350-A107, article number 894690
	Terminal CJC-A107, article number 893790

Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com
www.gantner-instruments.com