


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE	Lei/2011/05/09	Michael/2011/05/09	Johnson/2011/05/09

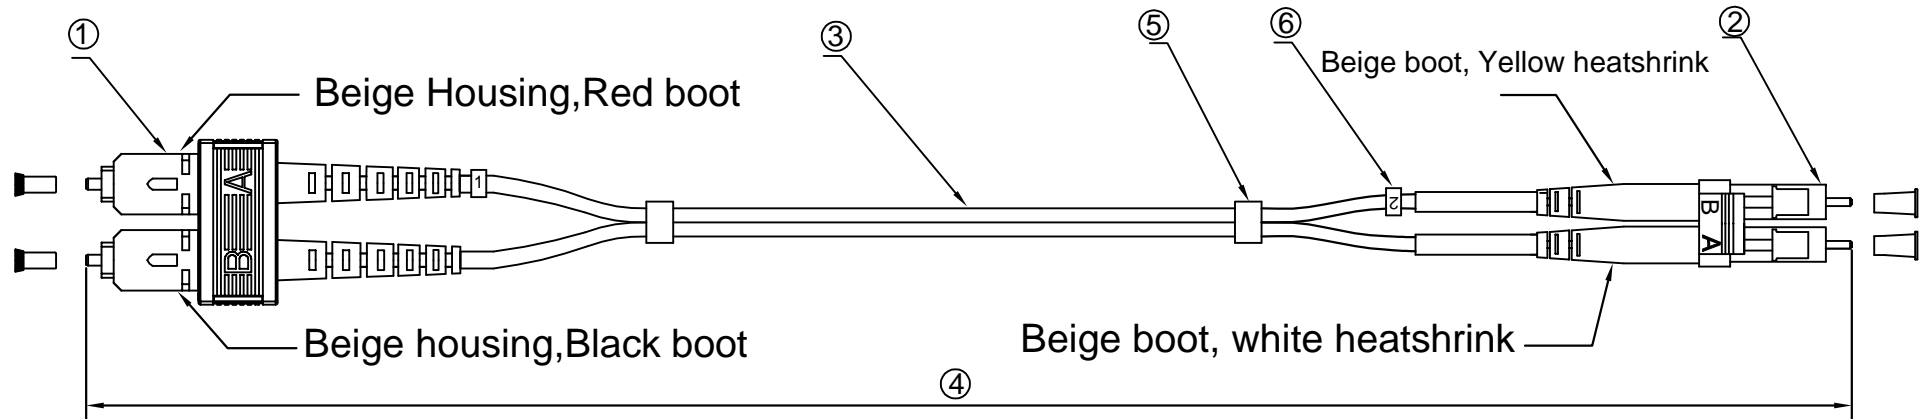

**Specification:**

- 1.Connector Type: SC/PC Multimode
- 2.Connector Type: LC/PC Multimode
- 3.Cable Type:  
Zipcord cable,  $\phi$  1.8mm. 50/125um , Multimode,  
Cable Jacket : Orange color, LSZH material
- 4.Length : xM
- 5.Shrink Tube
- 6.Cable Marker

Part Number	Length
LCSC-51	1M
LCSC-52	2M
LCSC-53	3M
LCSC-55	5M
LCSC-510	10M
LCSC-515	15M
LCSC-520	20M
LCSC-5xx	xxM

**Performance:**

- a. Insertion Loss :<0.3 dB
- b. Increase in insertion loss after 500 mating:0.2 dB Max.
- c. Operation Temperature :-20° to +70°
- d. Storage Temperature :-40° to +80°

UNIT		TITLE	VERSION
mm		Patch Cord,LC-SC,Duplex,MM-50/125 , LSZH,1.8mm,XXmeters	1.0
unless otherwise stated Tolerances mm XXX.XX ±0.3 XX.XX ±0.2 X.XX ±0.1 angular ±2°		P/N.	DRAWN BY Leinazi
		MATERIAL	CHECK BY Michael
		SCALE	APPROVAL BY Johnson
		PAGE	1/1